

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

ECM40-60



- 40 & 60 Watt Models
- Small Size 2.0"x 4.0"x 1.2"
- Low Leakage Current
- Industrial & Medical Approvals
- Full Load Available Convection Cooled
- Wide Operating Temperature 0 °C to +70 °C
- Level B Conducted Emissions
- EN61000 Compliant
- Universal AC Input 90-264 VAC
- Input Frequency 47-63 & 440 Hz
- Single & Multiple Outputs
- Cover Kits Available
- Mating Connector & Loom Kits Available

Approved for Class I and Class II applications, the ECM range of single and multiple output AC-DC, 40-60 W power supplies from XP feature the world's smallest footprint for units of these ratings. Both are just 2" x 4" (50.8 mm x 101.6 mm) and 1.2" (30.48 mm) high. Furthermore, these high-density power supplies meet EN55022 Level B conducted emissions with maximum leakage currents of 100 μ A at 115 VAC or 200 μ A at 230 VAC. As a result, these switchers are equally suitable for industrial, IT and medical applications, with no price premium for meeting medical requirements.

The ECM40-60 series have single output versions from 5 V to 48 VDC, adjustable by $\pm 10\%$, and dual and triple output versions covering combinations of 3.3 V, 5 V, 12 V, 15 V and 24 V. They are dual-fused for compliance with IEC60601-1 and efficiency is 80-85%, depending upon the model, so minimal excess heat is generated.

The power supplies deliver full power between 0 °C and +50 °C and will operate at up to +70 °C with derating and only 5 CFM of cooling. Comprehensive overvoltage, overload and short circuit protection is built in. Covers, looms and connector kits are available.

Input Characteristics

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|---------------------------|---------|---------|---------|---------|--|
| Input Voltage - Operating | 90 | | 264 | VAC | 120-370 VDC |
| Input Frequency | 47 | 50/60 | 63 | Hz | 400 Hz operation available |
| Input Current - No load | | | 41 | mA | 230 VAC |
| Input Current - Full load | | | 1.38 | A | 90 VAC |
| Inrush Current | | | 40 | A | Cold start at 230 VAC |
| Power Factor | | 0.62 | | | 230 VAC |
| Earth Leakage Current | | | 290 | μ A | 264 VAC |
| Input Protection | | | | | T3.15 A/ 250 V internal fuse in line & neutral |

All specifications are at nominal input, full resistance load at 25°C unless otherwise stated.

Output Characteristics

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|--------------------------|--|---------|---|--------------------|--|
| Output Voltage | 5.0 | | 48.0 | VDC | See modules table |
| Initial Set Accuracy | | | V ¹ : \pm 1, V ² & V ³ : \pm 5 | % | |
| Output Voltage Trim | \pm 10 | | | % | V ¹ (V ² will track V ¹ by the same %) |
| Minimum load | V ¹ : 0.5, V ² : 0.1 | | | A | Not required on single output models |
| Start Up Delay | | | 1.5 | s | 90 VAC |
| Start Up Rise Time | | | 10 | ms | |
| Hold Up Time | 16 | | 75 | ms | 115-230 VAC input |
| Drift | | | \pm 0.2 | % | |
| Line Regulation | | | \pm 0.5 | % | 90-264 VAC |
| Load Regulation | | | \pm 1.0 | % | Single output |
| | | | V ¹ : \pm 3, V ² & V ³ : \pm 5 | % | Dual output |
| Transient Response | | | 4 | % | Output voltage recovers to within 1% in less than 500 μ s for 50% load change. |
| Ripple & Noise | | | 1 | %pk-pk | 20 MHz bandwidth |
| Overvoltage Protection | 115 | | 135 | VDC | Recycle input to reset |
| Overload Protection | 110 | | 170 | % I _{max} | Auto-recovery |
| Short Circuit Protection | | | | | Trip & restart (hiccup mode) |
| Temperature Coefficient | | | 0.05 | %/°C | |

General Specifications

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions | |
|---------------------|---------|------------|---------|-------------------|----------------------------------|----------------------------------|
| Efficiency | 70 | | | % | 3.3 & 5 V single output versions | |
| | 80 | | | | (at 230 VAC full load) | All other single output versions |
| | 75 | | | | | Dual output versions |
| Isolation Voltage | | 4000 | | VAC | Input to output | |
| | | 1500 | | | Input to ground | |
| | | 500 | | | Output to ground | |
| Switching Frequency | | 70 | | kHz | Fixed | |
| Power Density | | | 6.25 | W/In ³ | For 60 W version | |
| Weight | | 0.33 (150) | | lbs (g) | | |
| MTBF | | 600 | | kHrs | Mil HDBK 217F | |

Environmental

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------|---------|---------|---------|-------|---------------------|
| Operating Temperature | -0 | | +70 | °C | See derating curves |
| Storage Temperature | -40 | | +85 | °C | |
| Cooling | | 0 | | CFM | Convection-cooled |
| Operating Humidity | | | 95 | % RH | Non- condensing |
| Operating Altitude | | | 3000 | m | |
| Shock | | | 30 | Gpk | Half sine 6 axis |
| Vibration | | | 2 | G | 5-500 Hz 3 axis |

Electromagnetic Compatibility & Immunity

| Standard | Test Level | Criteria | Notes & Conditions |
|----------------------|---------------------------|---|---------------------------------|
| Emissions | EN55022 | Class B Conducted | |
| | EN55022 | Class A Radiated | |
| | EN60601-1-2 | Class B Conducted | |
| Harmonic Currents | EN61000-3-2 | | |
| Voltage Flicker | EN61000-3-3 | | |
| ESD Immunity | EN61000-4-2 | level 2, performance criteria A | |
| Radiated Immunity | EN61000-4-3 | 10 V/m, performance criteria A | |
| EFT/Burst | EN61000-4-4 | level 2, performance criteria A | |
| Surge | EN61000-4-5 | level 3, performance criteria A | |
| Conducted Immunity | EN61000-4-6 | 10 Vrms, performance criteria A | |
| Dips & Interruptions | EN61000-4-11 | 70% U ^T : performance criteria A | For 10 ms, 100% load |
| | | 40% U ^T : performance criteria B | For 100 ms, 100% load |
| | | 0% U ^T : performance criteria B | For 5000 ms, 100% load |
| Dips & Interruptions | EN61000-4-11 (Medical) | 70% U _t , performance criteria A | For 500 ms, Medical, 100% load |
| | | 40% U _t , performance criteria A | For 100 ms, Medical, 60% load |
| | | 0% U _t , performance criteria A | For 10 ms, Medical, 100% load |
| | | 0% U _t , performance criteria B | For 5000 ms, Medical, 100% load |

Safety Approvals

| Safety Agency | Safety Standard | Category |
|---------------|---|------------------------|
| CB Report | Certificate # US/12606 & 12607/UL IEC60950-1:2005 Ed 2 | Information Technology |
| UL | UL File #E139109-A62-UL UL60950-1 (2007), CSA 22.2 No.60950-1-07 Ed 2 | Information Technology |
| TUV | TUV Certificate # B08 07 57396 052 & B09 03 57396 058, EN60950-1:2004 | Information Technology |
| CE | LVD | |

| Safety Agency | Safety Standard | Category |
|---------------|---|----------|
| CB Report | Certificate #US/18293 & 18269/UL, IEC60601-1 Ed 3 Including Risk Management | Medical |
| UL | UL File # E146893, ANSI/AAMI ES 60601-1:2005 & CSA C22.2 No. 60601-1:08 | Medical |
| TUV | TUV Certificate # B12 01 57396 125, EN60601-1:2006 | Medical |

| Means of Protection | | Category |
|----------------------|---|-----------------|
| Primary to Secondary | 1 x MOPP (Means of Patient Protection) Contact Sales for 2 x MOPP | IEC60601-1 Ed 3 |
| Primary to Earth | 1 x MOPP (Means of Patient Protection) | |

| Equipment Protection Class | Safety Standard | Notes & Conditions |
|----------------------------|--|---|
| Class I & Class II | IEC60950-1:2005 Ed 2 & IEC60601-1 Ed 3 | See safety agency conditions of acceptability for details |

Models & Ratings

| Max Power | Outputs | | | | | | Model Number |
|-----------|---------|--------------------------|--------|---------------|--------|---------------|--------------|
| | V1 | Imin/Imax ⁽³⁾ | V2 | Imin/Imax | V3 | Imin/Imax | |
| 40 W | 5.0V | 0.0 A / 8.0 A | | | | | ECM40US05†* |
| | 7.0V | 0.0 A / 5.7 A | | | | | ECM40US07 |
| | 9.0V | 0.0 A / 4.4 A | | | | | ECM40US09* |
| | 12.0V | 0.0 A / 3.5 A | | | | | ECM40US12†* |
| | 15.0V | 0.0 A / 2.7 A | | | | | ECM40US15†* |
| | 18.0V | 0.0 A / 2.2 A | | | | | ECM40US18 |
| | 24.0V | 0.0 A / 1.7 A | | | | | ECM40US24†* |
| | 33.0V | 0.0 A / 1.2 A | | | | | ECM40US33 |
| | 48.0V | 0.0 A / 0.9 A | | | | | ECM40US48†* |
| | +5.0V | 0.5 A / 6.0 A | +12.0V | 0.1 A / 2.0 A | | | ECM40UD21 |
| | +5.0V | 0.5 A / 6.0 A | +15.0V | 0.1 A / 1.5 A | | | ECM40UD22 |
| | +5.0V | 0.5 A / 6.0 A | +12.0V | 0.1 A / 2.0 A | -12.0V | 0.0 A / 0.5 A | ECM40UT31†* |
| | +5.0V | 0.5 A / 6.0 A | +24.0V | 0.1 A / 1.0 A | -12.0V | 0.0 A / 0.5 A | ECM40UT32† |
| | +5.0V | 0.5 A / 6.0 A | +15.0V | 0.1 A / 1.5 A | -15.0V | 0.0 A / 0.5 A | ECM40UT33†* |
| | +3.3V | 0.5 A / 6.0 A | +5.0V | 0.1 A / 1.5 A | +12.0V | 0.0 A / 0.5 A | ECM40UT34†* |
| | +5.0V | 0.5 A / 6.0 A | +3.3V | 0.1 A / 1.5 A | +12.0V | 0.0 A / 0.5 A | ECM40UT35† |

| Max Power | Outputs | | | | | | Model Number |
|-----------|---------|--------------------------|--------|---------------|--------|---------------|--------------|
| | V1 | Imin/Imax ⁽³⁾ | V2 | Imin/Imax | V3 | Imin/Imax | |
| 60 W | 5.0V | 0.0 A / 12.00 A | | | | | ECM60US05†* |
| | 7.0V | 0.0 A / 8.60 A | | | | | ECM60US07 |
| | 9.0V | 0.0 A / 6.70 A | | | | | ECM60US09* |
| | 12.0V | 0.0 A / 5.00 A | | | | | ECM60US12†* |
| | 15.0V | 0.0 A / 4.00 A | | | | | ECM60US15†* |
| | 18.0V | 0.0 A / 3.30 A | | | | | ECM60US18 |
| | 20.0V | 0.0 A / 3.00 A | | | | | ECM60US20 |
| | 24.0V | 0.0 A / 2.50 A | | | | | ECM60US24†* |
| | 28.0V | 0.0 A / 2.14 A | | | | | ECM60US28 |
| | 33.0V | 0.0 A / 1.80 A | | | | | ECM60US33 |
| | 48.0V | 0.0 A / 1.25 A | | | | | ECM60US48†* |
| | +5.0V | 0.5 A / 8.00 A | +12.0V | 0.1 A / 3.0 A | | | ECM60UD21 |
| | +5.0V | 0.5 A / 8.00 A | +15.0V | 0.1 A / 2.5 A | | | ECM60UD22 |
| | +5.0V | 0.5 A / 8.00 A | +12.0V | 0.1 A / 3.0 A | -12.0V | 0.0 A / 0.5 A | ECM60UT31†* |
| | +5.0V | 0.5 A / 8.00 A | +24.0V | 0.1 A / 1.5 A | -12.0V | 0.0 A / 0.5 A | ECM60UT32† |
| | +5.0V | 0.5 A / 8.00 A | +15.0V | 0.1 A / 2.5 A | -15.0V | 0.0 A / 0.5 A | ECM60UT33†* |
| | +3.3V | 0.5 A / 8.00 A | +5.0V | 0.1 A / 1.5 A | +12.0V | 0.0 A / 0.5 A | ECM60UT34†* |
| | +5.0V | 0.5 A / 8.00 A | +3.3V | 0.1 A / 1.5 A | +12.0V | 0.0 A / 0.5 A | ECM60UT35† |

Notes


- V2 will track a change in V1 by the same percentage change in voltage as V1 is trimmed.
- To receive unit with cover fitted, add suffix '-C' to model number. For Class I operation only.
- A 120% peak load can be taken for up to 100 ms with a 25% duty cycle. Average load not to exceed maximum power rating.

† Available from Farnell InOne.


* Available from Newark InOne.

Thermal Derating Curves

All ECM40 models convection-cooled

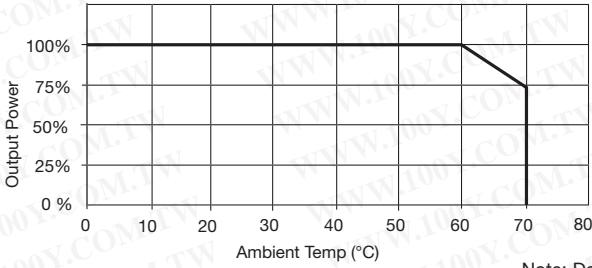


All ECM40 models with 5 CFM

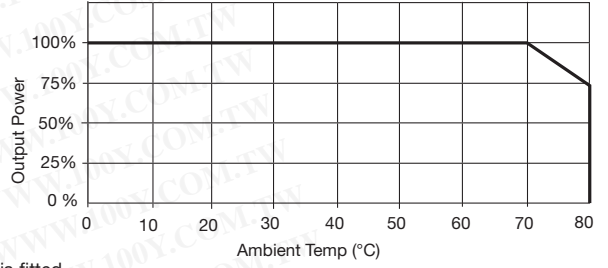


Note: Derate by 10% if cover is fitted

All ECM60 models convection-cooled

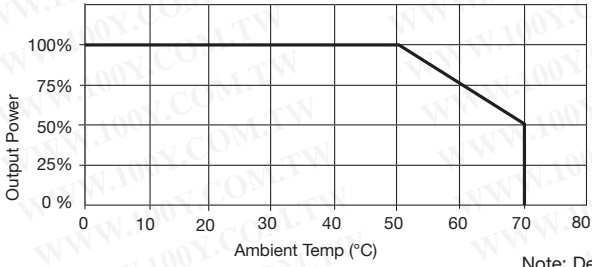


All ECM60 models with 5 CFM

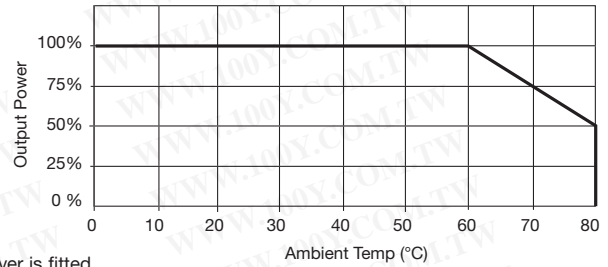


Note: Derate by 10% if cover is fitted

Transient Response

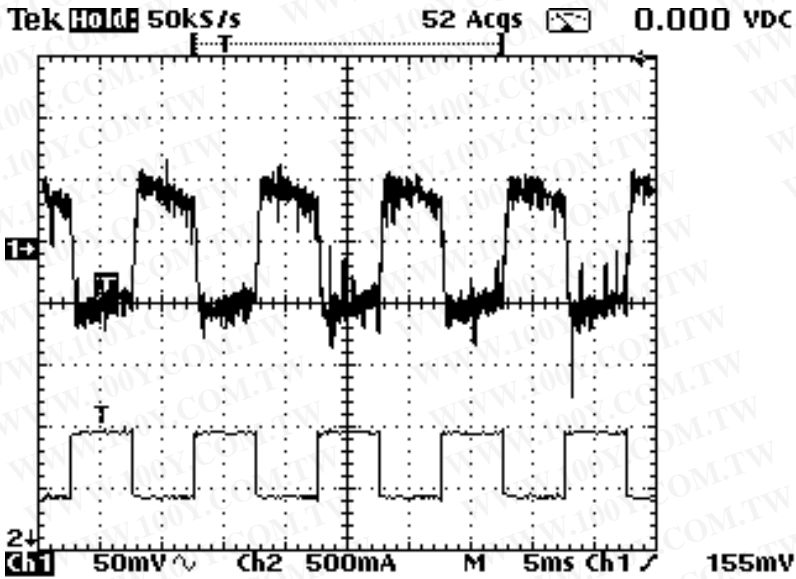


ECM60US24 25% load change

Efficiency Versus Input Voltage

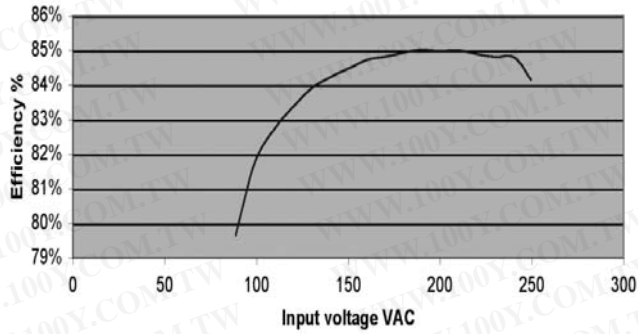


ECM60US24 with 60 W load

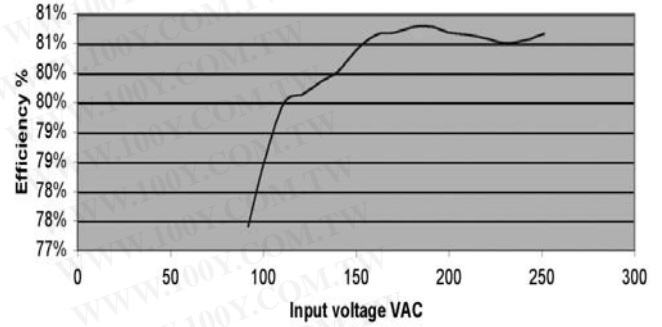


ECM60UT33 with 50 W load

Efficiency Versus Output Load

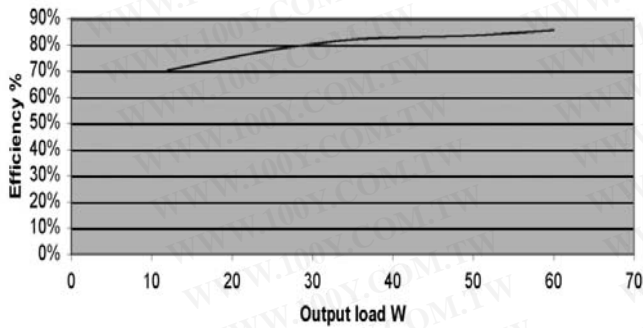


ECM60US24 at 230 VAC input

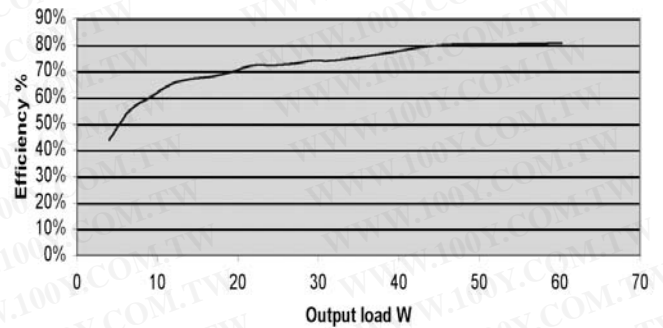


ECM60UT33 at 230 VAC input

Start Up Delay

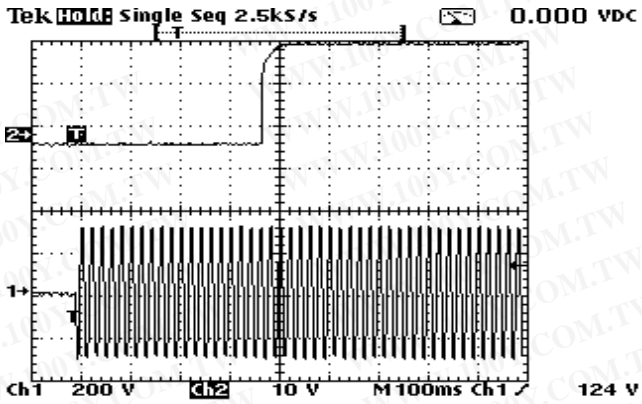


ECM60US24 with 60 W load

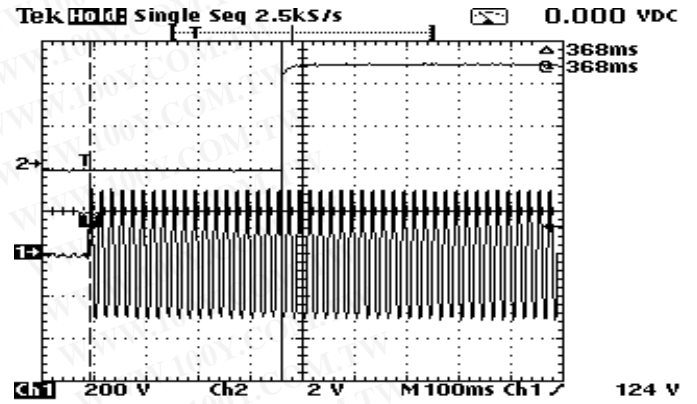


ECM60UT33 with 60 W load

Hold Up Tme

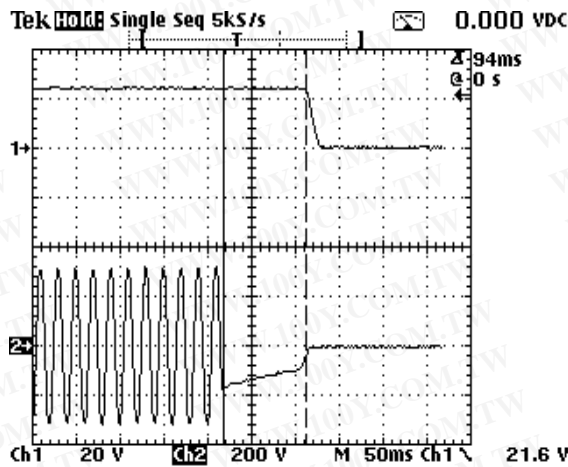


ECM60US24 with 60 W load at 230 VAC

Overload Characteristics

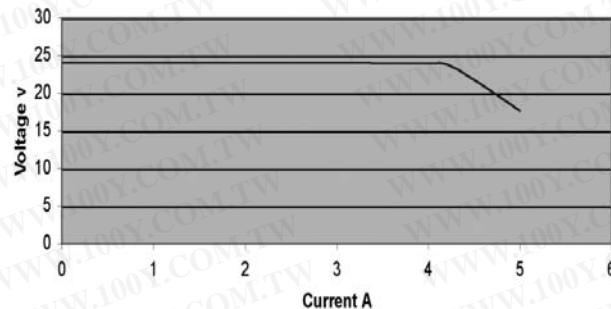


ECM60US24. When current reaches 5.4 A, output goes into trip and restart (hiccup) mode


Ripple & Noise

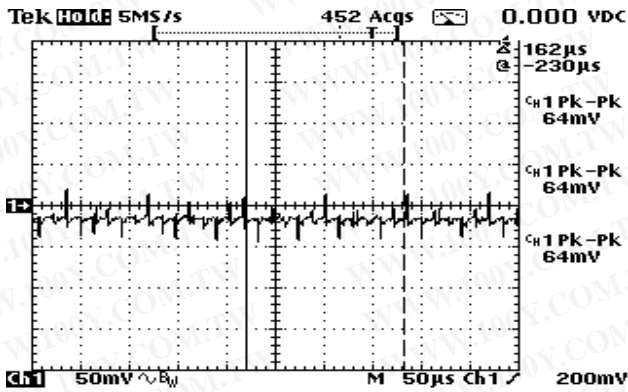


ECM60US24 with 60 W load
Noise measured is 64 mV pk-pk

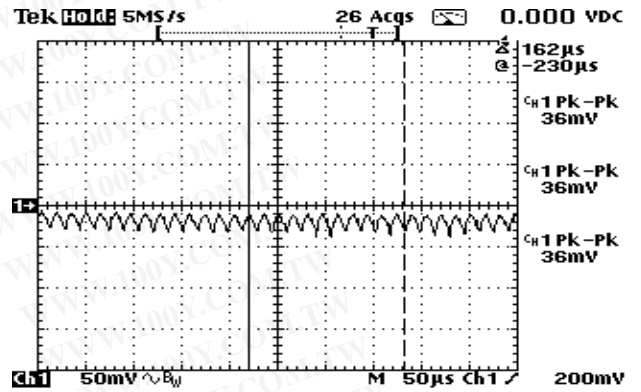

ECM60UT33 output 1 with 30 W load.
Noise measured is 36 mV pk-pk

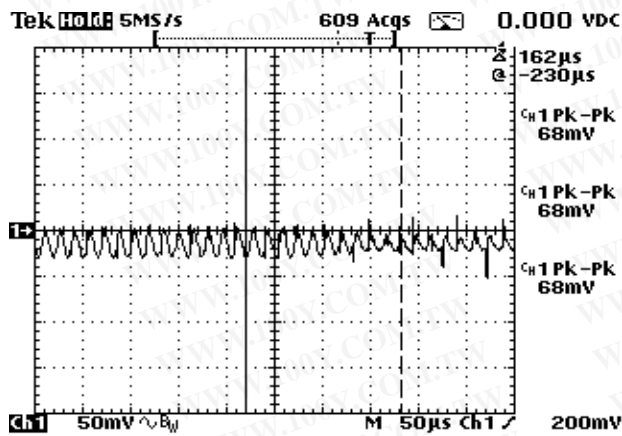


ECM60UT33 output 2 with 15 W load.
Noise measured is 68 mV pk-pk

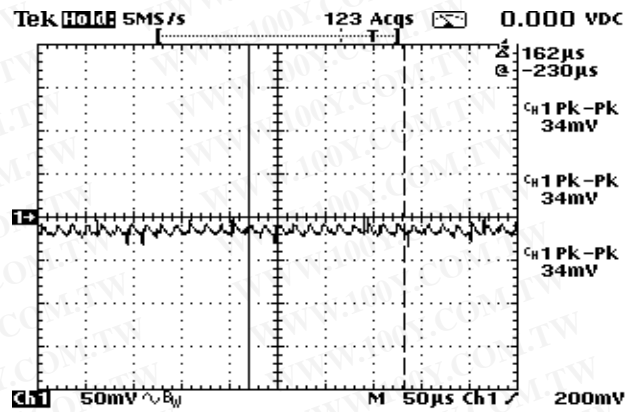

ECM60UT33 output 3 with 7 W load.
Noise measured is 34 mV pk-pk

Conducted Noise


P M M 8 0 0 0 P L U S Name: ecm6024 Date: 06/09/04 Time: 14:58

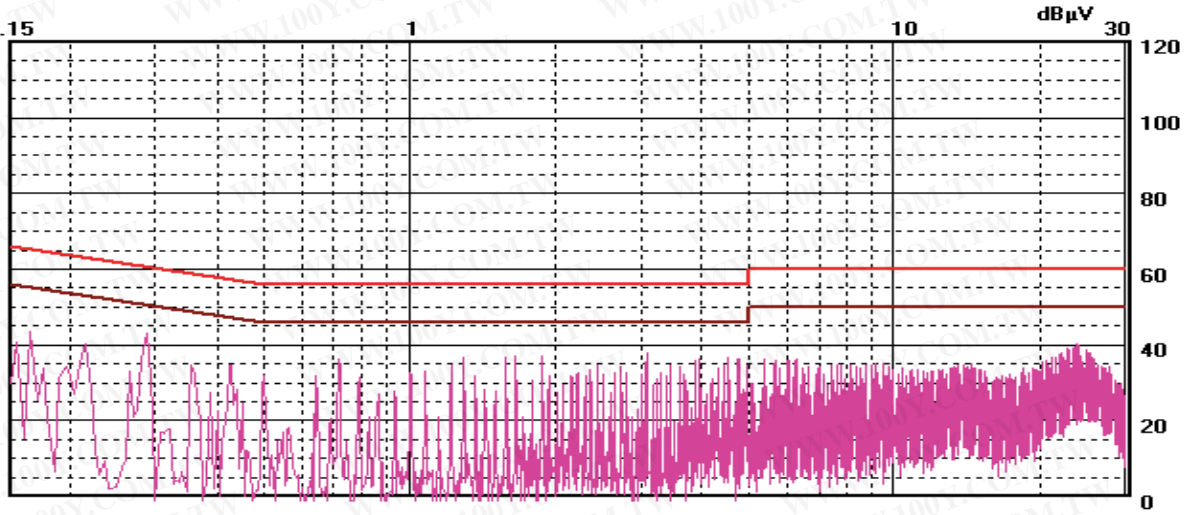

Limit #1: 022qp-b Limit #2: 022av-b Detector: Peak
 ecm60us24 24v @ full load(2.5A) s/n 56710227

ECM60US24 at full load

P M M 8 0 0 0 P L U S Name: ecm60t33 Date: 07/09/04 Time: 10:49

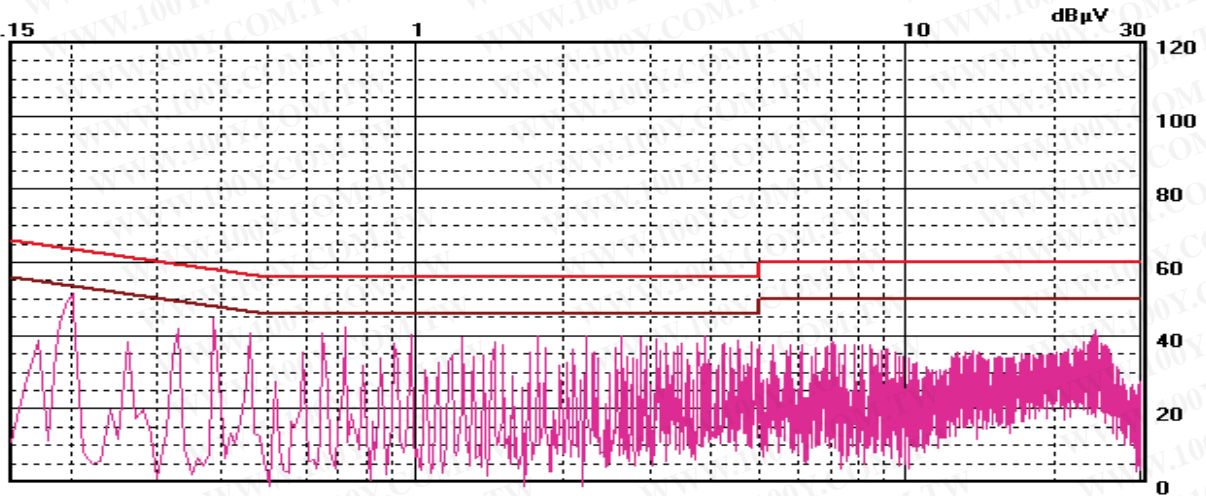


Limit #1: 022qp-b Limit #2: 022av-b Detector: Peak
 ECM60UT33 S/N 56870 012
 FULL LOAD(V1 5V@6A V2 15V@2A)

ECM60UT33 at full load

Mechanical Details - Single Output Models

Weight: approx. 0.33 lb (150g)

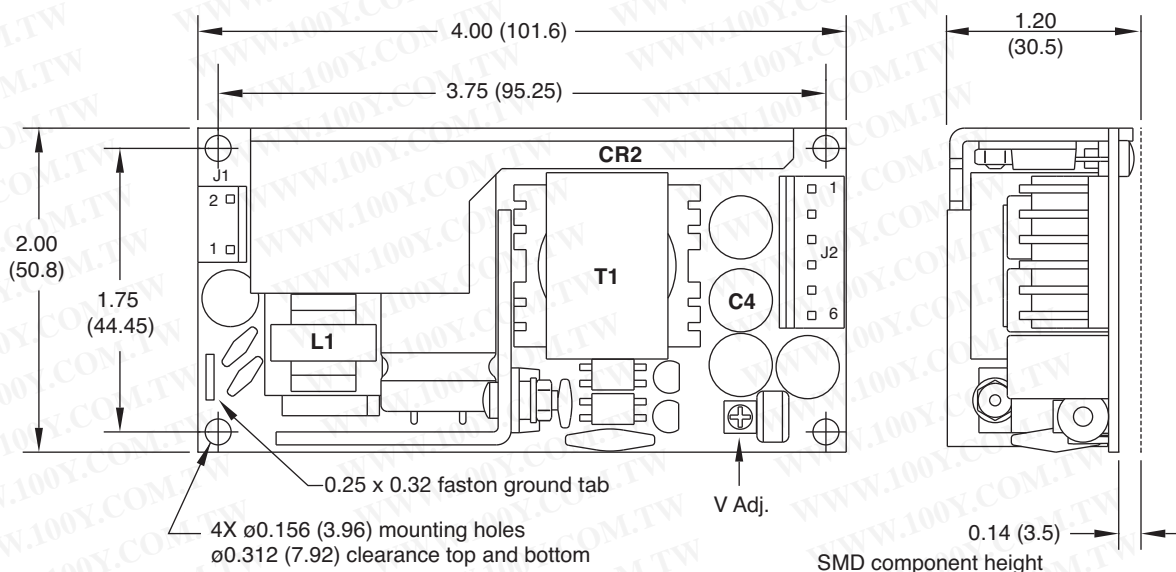

| Input Connector J1 | |
|--------------------|---------|
| Pin 1 | Line |
| Pin 2 | Neutral |

J1 mates with Molex housing 43061-0003 and Molex series 5194 crimp terminals. Ground (0.25 faston) tab standard.

| Output Connector J2 | |
|---------------------|--------|
| Pin | Single |
| 1 | +V1 |
| 2 | +V1 |
| 3 | RTN |
| 4 | RTN |
| 5 | N.C. |
| 6 | N.C. |

J2 mates with Molex housing 43061-0006 & Molex series 5194 crimp terminals.

Notes

- All dimensions in inches (mm). Tolerance .xx = ±0.02 (0.50); .xxx = ±0.01 (0.25)
- Cable harnesses with 300mm wire available.
For single output models, order part number ECM40/60S LOOM.
For multi-output models, order part number ECM40/60DT LOOM .
- Mating connector kit available. Order part number ECM40/60 CONKIT.
- Covers available. Order part number ECM40/60 COVER. Cover dimensions are 4.49 x 2.52 x 1.52 (114 x 64 x 38.5)
- † All accessories available from Farnell InOne.


Thermal Considerations

To ensure correct and safe operation of the PSU, the temperature of the components listed in the table below must not be exceeded. See mechanical details for component locations.

| Component | Maximum Temperature |
|-----------|---------------------|
| L1 | 110 °C |
| T1 | 110 °C |
| CR2 | 120 °C |
| C4 | 95 °C |

Mechanical Details - Single Output Models (3 x 5)

Weight: approx. 0.4 lb (180 g)

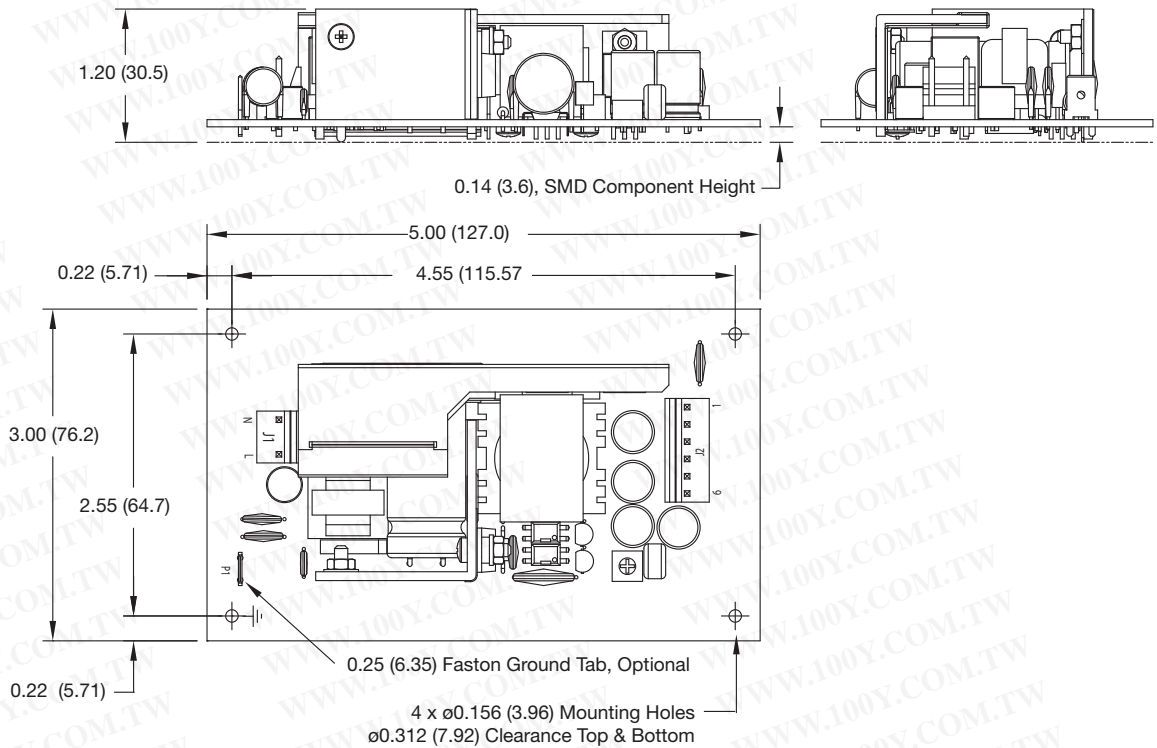

| Input Connector J1 | |
|--------------------|---------|
| Pin 1 | Line |
| Pin 2 | Neutral |

J1 mates with Molex housing 43061-0003 and Molex series 5194 crimp terminals. Ground (0.25 faston) tab standard.

| Output Connector J2 | |
|---------------------|--------|
| Pin | Single |
| 1 | +V1 |
| 2 | +V1 |
| 3 | RTN |
| 4 | RTN |
| 5 | N.C. |
| 6 | N.C. |

J2 mates with Molex housing 43061-0006 & Molex series 5194 crimp terminals.

Notes

- All dimensions in inches (mm). Tolerance .xx = ±0.02 (0.50); .xxx = ±0.01 (0.25)
- Cable harnesses with 300mm wire available.
For single output models, order part number ECM40/60S LOOM.
For multi-output models, order part number ECM40/60DT LOOM .
- Mating connector kit available. Order part number ECM40/60 CONKIT.
- Covers available. Order part number ECM40/60 COVER. Cover dimensions are 4.49 x 2.52 x 1.52 (114 x 64 x 38.5)
- † All accessories available from Farnell InOne.


Thermal Considerations

To ensure correct and safe operation of the PSU, the temperature of the components listed in the table below must not be exceeded. See mechanical details for component locations.

| Component | Maximum Temperature |
|-----------|---------------------|
| L1 | 110 °C |
| T1 | 110 °C |
| CR2 | 120 °C |
| C4 | 95 °C |

Mechanical Details - Multi Output Models

Weight: approx. 0.33 lb (150g)

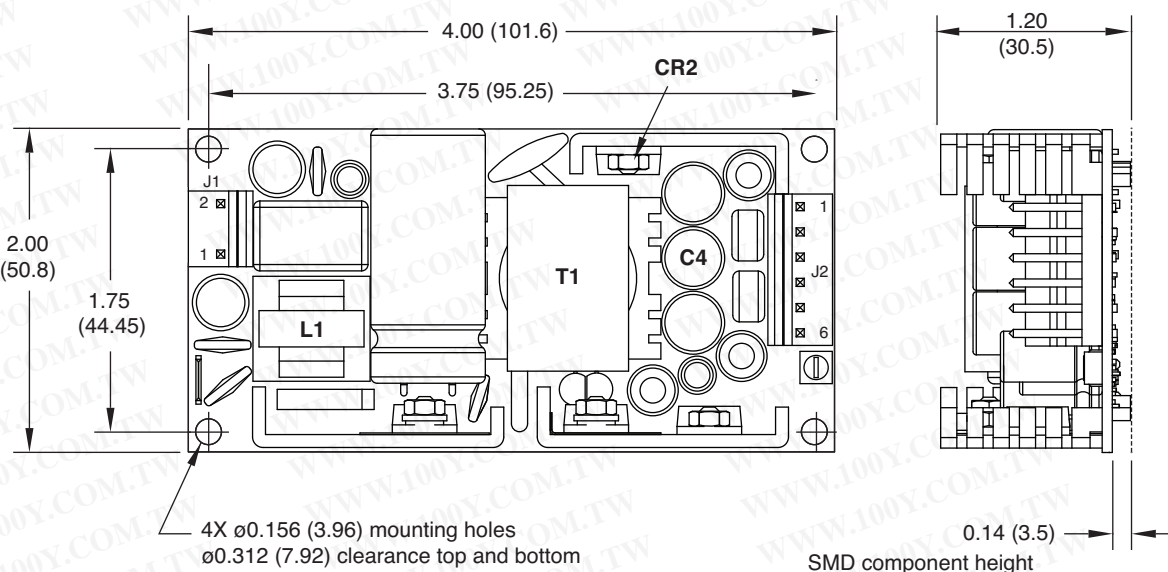

| Input Connector J1 | |
|--------------------|---------|
| Pin 1 | Line |
| Pin 2 | Neutral |

J1 mates with Molex housing 43061-0003 and Molex series 5194 crimp terminals. Ground (0.25 faston) tab standard.

| Output Connector J2 | |
|---------------------|--------|
| Pin | Single |
| 1 | +V1 |
| 2 | +V1 |
| 3 | RTN |
| 4 | RTN |
| 5 | -V3 |
| 6 | +V2 |

J2 mates with Molex housing 43061-0006 & Molex series 5194 crimp terminals.

Notes


- All dimensions in inches (mm). Tolerance .xx = ±0.02 (0.50); .xxx = ±0.01 (0.25)
- Cable harnesses with 300mm wire available.
For single output models, order part number ECM40/60S LOOM.
For multi-output models, order part number ECM40/60DT LOOM.
- Mating connector kit available. Order part number ECM40/60 CONKIT.
- Covers available. Order part number ECM40/60 COVER. Cover dimensions are 4.49 x 2.52 x 1.52 (114 x 64 x 38.5)
- † All accessories available from Farnell InOne.

Thermal Considerations

To ensure correct and safe operation of the PSU, the temperature of the components listed in the table below must not be exceeded. See mechanical details for component locations.

| Component | Maximum Temperature |
|-----------|---------------------|
| L1 | 110 °C |
| T1 | 110 °C |
| CR2 | 120 °C |
| C4 | 95 °C |

ECM100 Series

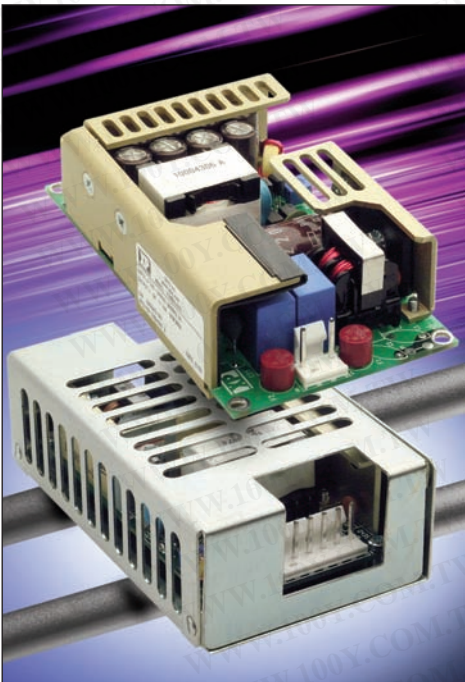

- 100 Watt Models
- Small Size 2.5" x 4.5" x 1.2"
- Low Leakage Current
- Industrial & Medical Approvals
- Convection & Force Cooled Ratings
- Wide Operating Temperature 0 °C to +70 °C
- Level B Conducted Emissions
- EN61000 Compliant
- Universal AC Input 90–264 VAC
- Input Frequency 47–63 & 440 Hz
- Cover Kits Available
- Mating Connector & Cable Harness Kits Available

Approved for Class I and Class II applications, the ECM100 range of single output AC-DC, 100 W power supplies from XP feature the world's smallest footprint for units of these ratings. Size is just 2.5" x 4.5" (63.5 mm x 114.3 mm) and 1.2" (30.48 mm) high. Furthermore, these high-density power supplies meet EN55022 Level B conducted emissions with maximum leakage currents of 125 μ A at 115 VAC or 210 μ A at 230 VAC. As a result, these switchers are equally suitable for industrial, IT and medical applications, with no price premium for meeting medical requirements.

The ECM100 series have single output versions from 3.3 V to 48 VDC, adjustable by $\pm 10\%$. They are dual-fused for compliance with IEC60601-1 and efficiency is 80-85%, depending upon the model, so minimal excess heat is generated.

The power supplies deliver full power between 0 °C and +50 °C and will operate at up to +70 °C with derating and only 5 CFM of cooling. Comprehensive overvoltage, overload and short circuit protection is built in. Covers, cable harnesses and connector kits are available.

Input Characteristics

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|---------------------------|--|---------|---------|-------|----------------------------|
| Input Voltage - Operating | 90 | | 264 | VAC | 120-370 VDC |
| Input Frequency | 47 | 50/60 | 63 | Hz | 400 Hz operation available |
| Power Factor | | 0.62 | | | 230 VAC |
| Input Current - No Load | | 40 | | mA | 230 VAC |
| Input Current - Full Load | | 0.9 | | A | 230 VAC |
| Inrush Current | | | 40 | A | 230 VAC cold start |
| Earth Leakage Current | | | 125/210 | μA | 115/230 VAC |
| Input Protection | T3.15 A/250 V internal fuse in both line and neutral | | | | |

Output Characteristics

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|---------------------------|---------------------|---------|---|--------|---|
| Output Voltage | 3.3 | | 48.0 | VDC | See Models and Ratings Table |
| Initial Set Accuracy | | | $V^1: \pm 1, V^2, V^3 \text{ \& } V^4: \pm 5$ | % | |
| Output Voltage Adjustment | ± 5 ± 10 | | | % | 3.3 & 5 V versions All other versions |
| Minimum Load | | | | A | See model tables |
| Start Up Delay | | | 1.5 | s | 90 VAC |
| Start Up Rise Time | | | 50 | ms | |
| Hold Up Time | 16 | | 75 | ms | 115-230 VAC input |
| Drift | | | ± 0.2 | % | |
| Line Regulation | | | ± 0.5 | % | 90-264 VAC |
| Load Regulation | | | ± 1 $V^1 \text{ \& } V^2: \pm 1, V^3 \text{ \& } V^4: \pm 5$ | % | Single output versions Multi output versions |
| Transient Response | | | 4 | % | Recovery to within 1% in less than 500 μs for a 25% load change |
| Ripple & Noise | | | 1 | %pk-pk | 20 MHz bandwidth |
| Overvoltage Protection | 115 | | 135 | % | V^1 only. Recycle input to reset |
| Overload Protection | 110 | | 170 | % | Primary power limit, auto-recovery |
| Short Circuit Protection | | | | | Trip & restart (Hiccup mode) |
| Temperature Coefficient | | | 0.05 | %/°C | |

General Specifications

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-------------------------------------|---------|-----------|---------|-------------------|-----------------------|
| Reliability and Service Life | | | | | |
| Isolation | | | | | |
| Input to Output Test Voltage | 4000 | | | VAC | Test duration: 1 min |
| Input to Ground Test Voltage | 1500 | | | VAC | Test duration: 1 min |
| Output to Ground Test Voltage | 500 | | | VAC | Test duration: 1 min |
| Other Specifications | | | | | |
| Efficiency | | 80-85 | | % | See Efficiency Graphs |
| Switching Frequency | | 70 | | kHz | Fixed |
| Weight | | 0.4 (180) | | lb (g) | |
| Power Density | | | 7.40 | W/in ³ | |
| MTBF | | 600 | | kHrs | MIL HDBK 217F |

Environmental

| Characteristic | Minimum | Typical | Maximum | Units | Notes & Conditions |
|-----------------------|---------|---------|---------|--------|--------------------------|
| Operating Temperature | 0 | | +70 | °C | See derating curves |
| Storage Temperature | -40 | | +85 | °C | |
| Cooling | 5 | | | CFM | For full power operation |
| Humidity | | | 95 | %RH | Non-condensing |
| Operating Altitude | | | 3000 | m | |
| Shock | | | 30 | G peak | Half sine 6 axis |
| Vibration | | | 2 | G rms | 5 Hz to 500 Hz, 3 axis |

Electromagnetic Compatibility - Immunity

| Phenomenon | Standard | Test Level | Criteria | Notes & Conditions |
|------------------------|---------------------------|------------|----------|---------------------------------|
| ESD | EN61000-4-2 | 3 | A | |
| EFT | EN61000-4-4 | 3 | A | |
| Radiated Field | EN61000-4-3 | 10 V/m | A | |
| Surges | EN61000-4-5 | 3 | A | |
| Conducted | EN61000-4-6 | 10 Vrms | A | |
| Dips and Interruptions | EN61000-4-11 (Medical) | 70% Ut | A | For 500 ms, Medical, 100% load |
| | | 40% Ut | A | For 100 ms, Medical, 60% load |
| | | 0% Ut | A | For 10 ms, Medical, 100% load |
| | | 0% Ut | B | For 5000 ms, Medical, 100% load |
| Dips and Interruptions | EN61000-4-11 | 70% Ut | A | For 10 ms, 100% load |
| | | 40% Ut | B | For 100 ms, 100% load |
| | | <5% Ut | B | For 5000 ms, 100% load |

Electromagnetic Compatibility - Emissions

| Phenomenon | Standard | Test Level | Criteria | Notes & Conditions |
|-------------------|-------------|------------|----------|--------------------|
| Conducted | EN55022/11 | Class B | | |
| Voltage Flicker | EN61000-3-3 | | | |
| Harmonic Currents | EN61000-3-2 | Class A | | |

Safety Agency Approvals

| Safety Agency | Safety Standard | Category |
|---------------|--|------------------------|
| CB Report | UL IEC60950-1:2005 Ed 2 | Information Technology |
| UL | UL File #E139109 UL60950-1 (2007), CSA 22.2 No.60950-1-07 Ed 2 | Information Technology |
| TUV | TUV EN60950-1:2004 | Information Technology |
| CE | LVD | |

| Safety Agency | Safety Standard | Category |
|---------------|--|----------|
| CB Report | UL, IEC60601-1 Ed 3 Including Risk Management | Medical |
| UL | UL File # E146893, ANSII/AAMI ES 60601-1:2005 & CSA C22.2 No. 60601-1:08 | Medical |
| TUV | EN60601-1:2006 | Medical |

| Means of Protection | | Category |
|---|---|-----------------|
| Primary to Secondary (ECM100USxx Models) | 2 x MOPP (Means of Patient Protection) | IEC60601-1 Ed 3 |
| Primary to Secondary (ECM100UMxx Models) | 1 x MOPP (Means of Patient Protection) Contact Sales for 2 x MOPP | |
| Primary to Earth | 1 x MOPP (Means of Patient Protection) | |

| Equipment Protection Class | Safety Standard | Notes & Conditions |
|----------------------------|--|---|
| Class I & Class II | IEC60950-1:2005 Ed 2 & IEC60601-1 Ed 2 | See safety agency conditions of acceptability for details |

Models and Ratings

Single Output Models

| Output Voltage | Output Current Minimum | Output Current Maximum | | Ripple & Noise | Model Number |
|----------------|------------------------|------------------------|--------|----------------|--------------|
| | | Convection cooled | 5 CFM | | |
| 3.3 V | 0.0 A | 15.0 A | 20.0 A | 50 mV | ECM100US03 |
| 5.0 V | 0.0 A | 15.0 A | 20.0 A | 50 mV | ECM100US05 |
| 7.0 V | 0.0 A | 11.4 A | 14.3 A | 70 mV | ECM100US07 |
| 9.0 V | 0.0 A | 8.8 A | 11.1 A | 90 mV | ECM100US09 |
| 12.0 V | 0.0 A | 7.5 A | 8.3 A | 120 mV | ECM100US12 |
| 15.0 V | 0.0 A | 6.0 A | 6.6 A | 150 mV | ECM100US15 |
| 18.0 V | 0.0 A | 5.0 A | 5.5 A | 180 mV | ECM100US18 |
| 24.0 V | 0.0 A | 4.1 A | 4.1 A | 240 mV | ECM100US24 |
| 28.0 V | 0.0 A | 3.6 A | 3.6 A | 280 mV | ECM100US28 |
| 33.0 V | 0.0 A | 3.0 A | 3.0 A | 330 mV | ECM100US33 |
| 48.0 V | 0.0 A | 2.1 A | 2.1 A | 480 mV | ECM100US48 |

Multi Output Models

| Power Max Convection | Power Max 5 CFM | Output 1 | Imin/Imax | Output 2 | Imin/Imax | Output 3 | Imin/Imax | Output 4 | Imin/Imax | Model Number |
|----------------------|-----------------|----------|------------|----------|----------------|----------|---------------|----------|---------------|--------------|
| 80 W | 100 W | +5.0V | 0.0 A/12 A | +12.0V | 0.00 A / 3.0 A | | | | | ECM100UD21 |
| 80 W | 100 W | +5.0V | 0.0 A/12 A | +15.0V | 0.00 A / 3.0 A | | | | | ECM100UD22 |
| 75 W | 100 W | +5.0V | 0.5 A/10 A | +12.0V | 0.00 A / 3.0 A | -12.0V | 0.0 A / 0.8 A | | | ECM100UT31 |
| 80 W | 100 W | +5.0V | 0.5 A/10 A | +24.0V | 0.00 A / 2.0 A | -12.0V | 0.0 A / 0.8 A | | | ECM100UT32 |
| 80 W | 100 W | +5.0V | 0.5 A/10 A | +15.0V | 0.00 A / 3.0 A | -15.0V | 0.0 A / 0.8 A | | | ECM100UT33 |
| 65 W | 100 W | +3.3V | 0.5 A/10 A | +5.0V | 0.00 A / 5.0 A | +12.0V | 0.0 A / 0.8 A | | | ECM100UT34 |
| 70 W | 100 W | +5.0V | 0.5 A/10 A | +3.3V | 0.00 A / 5.0 A | +12.0V | 0.0 A / 0.8 A | | | ECM100UT35 |
| 80 W | 100 W | +5.0V | 0.5 A/10 A | +12.0V | 0.00 A / 3.0 A | -5.0V | 0.0 A / 0.8 A | | | ECM100UT36 |
| 70 W | 100 W | +5.0V | 0.5 A/10 A | +15.0V | 0.00 A / 3.0 A | -5.0V | 0.0 A / 0.8 A | | | ECM100UT37 |
| 65 W | 100 W | +5.0V | 0.5 A/10 A | +3.3V | 0.10 A / 5.0 A | +12.0V | 0.0 A / 0.8 A | -12.0V | 0.0 A / 0.5 A | ECM100UQ41 |
| 60 W | 100 W | +3.3V | 0.5 A/10 A | +5.0V | 0.10 A / 5.0 A | +12.0V | 0.0 A / 0.8 A | -12.0V | 0.0 A / 0.5 A | ECM100UQ42 |
| 80 W | 100 W | +5.0V | 0.5 A/10 A | +24.0V | 0.10 A / 2.0 A | +12.0V | 0.0 A / 0.8 A | -12.0V | 0.0 A / 0.5 A | ECM100UQ43 |
| 80 W | 100 W | +5.0V | 0.5 A/10 A | +24.0V | 0.10 A / 2.0 A | +15.0V | 0.0 A / 0.8 A | -15.0V | 0.0 A / 0.5 A | ECM100UQ44 |
| 80 W | 100 W | +5.0V | 0.5 A/10 A | +12.0V | 0.10 A / 3.0 A | -12.0V | 0.0 A / 0.8 A | -5.0V | 0.0 A / 0.5 A | ECM100UQ45 |
| 80 W | 100 W | +5.0V | 0.5 A/10 A | +15.0V | 0.10 A / 3.0 A | -15.0V | 0.0 A / 0.8 A | -5.0V | 0.0 A / 0.5 A | ECM100UQ46 |


Notes

1. To receive unit with cover fitted, add suffix '-C' to model number.

2. Output 3 available with opposite polarity for OEM quantities.

Derating Curves


All ECM100 single output models convection cooled

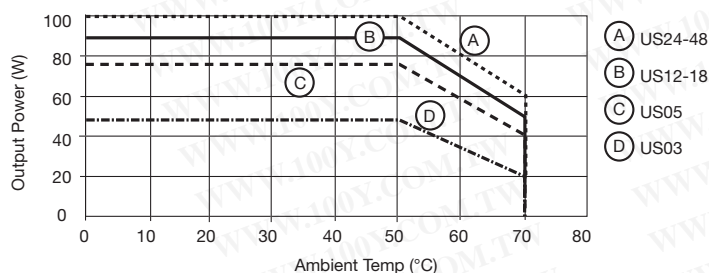


Note:

- Derate by 10% if cover is fitted.
- For multi output convection-cooled operation above 50 °C derate linearly to 50% at 70 °C.

All ECM100 models with 5 CFM

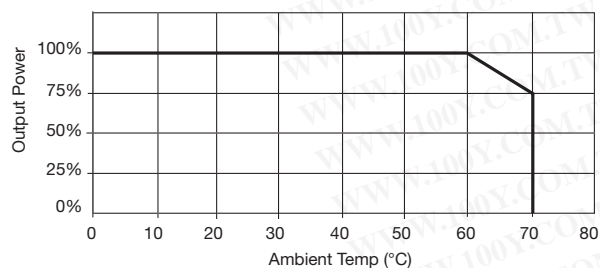


Transient Response

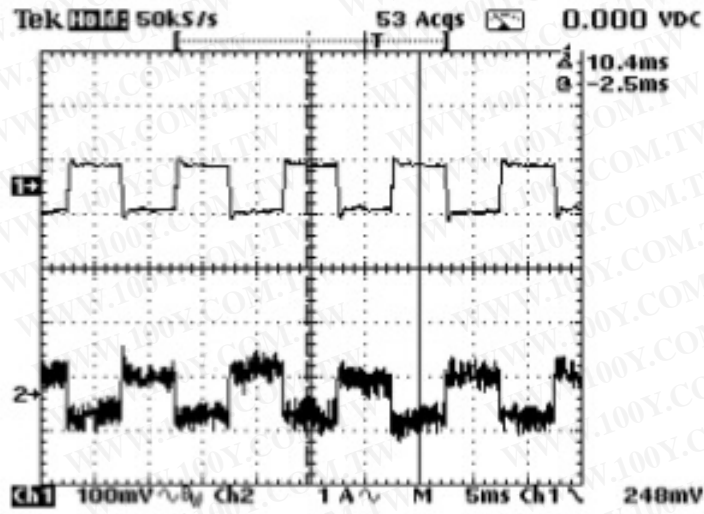


ECM100US24 25% load change

Efficiency Versus Input Voltage

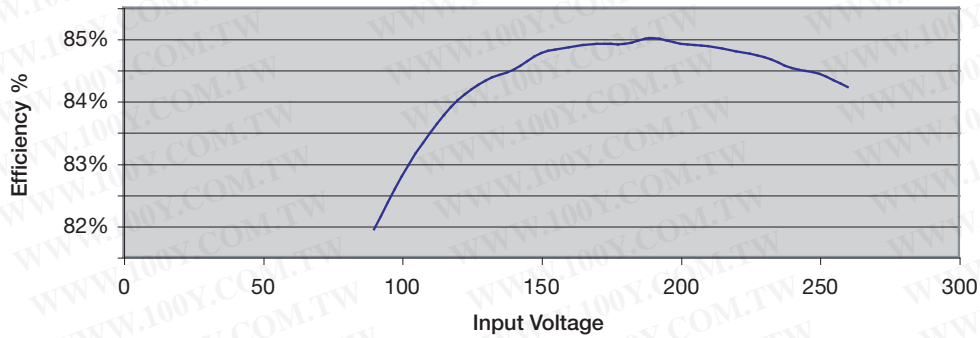


Efficiency shown for ECM100US24

Efficiency Versus Output Load

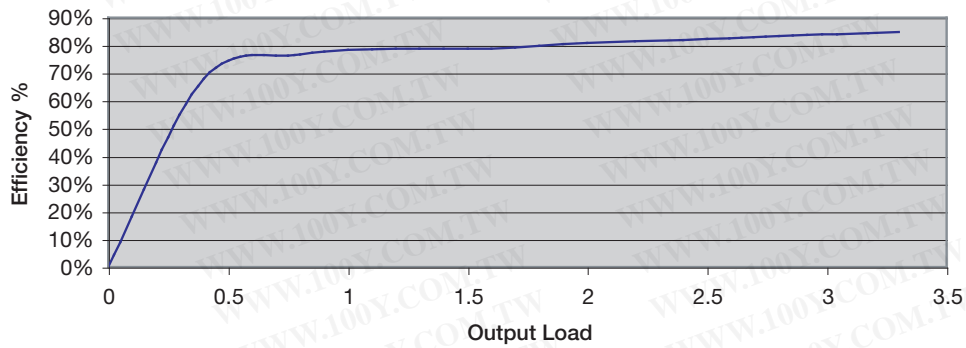


Efficiency shown for ECM100US24

Start Up Delay

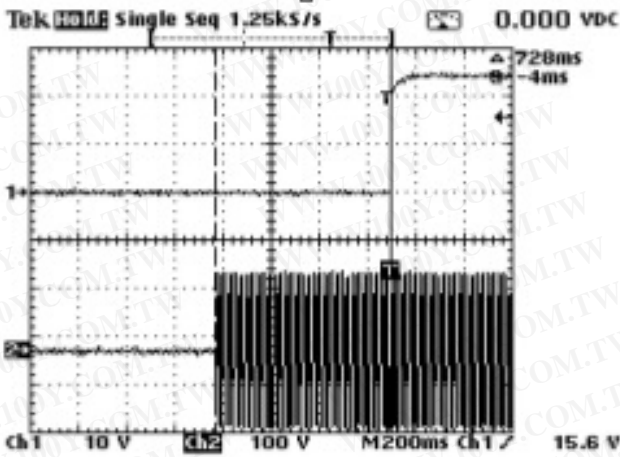


ECM100US24 start up 115 VAC at 100% load

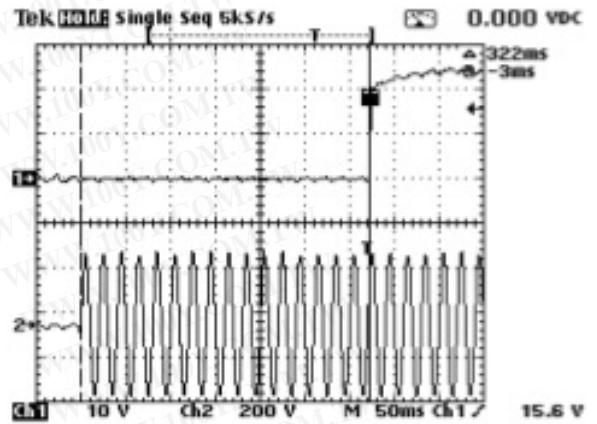


ECM100US24 start up 230 VAC at 100% load

Hold Up Time

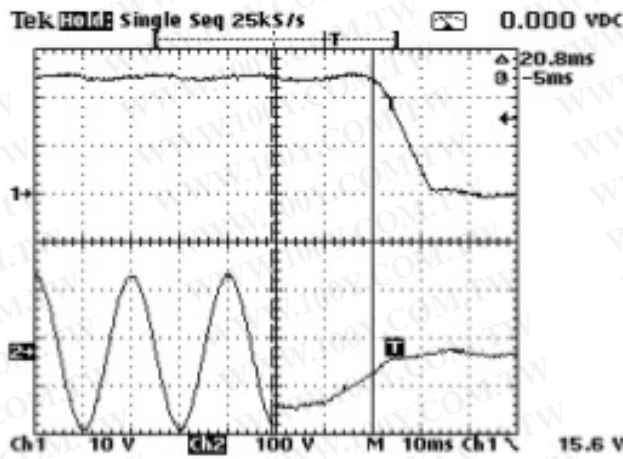


ECM100US24 hold up 115 VAC at 100% load
Hold up time is 20.8 ms

Overload Characteristics

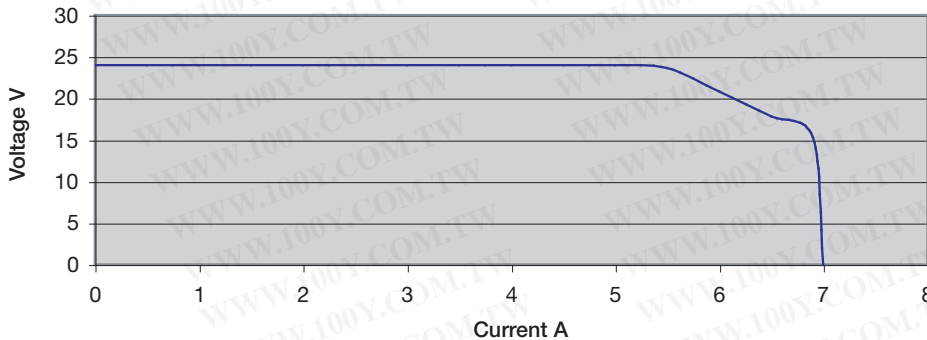


ECM100US24. When current reaches 6.9 A, output goes into trip & restart (Hiccup mode)

Output Ripple & Noise

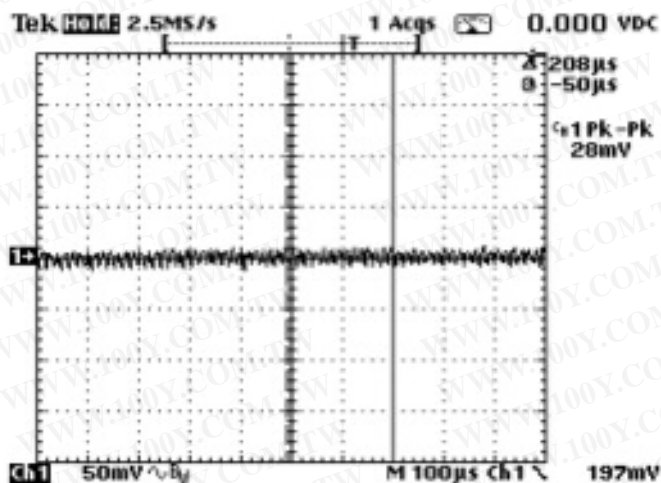


ECM100US24 with 100 W load
Noise measured is 28 mV


Conducted Noise

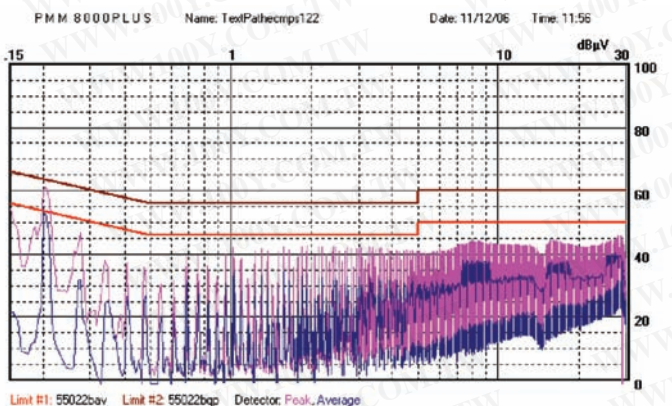


ECM100US12 Class I - Output floating (full load)

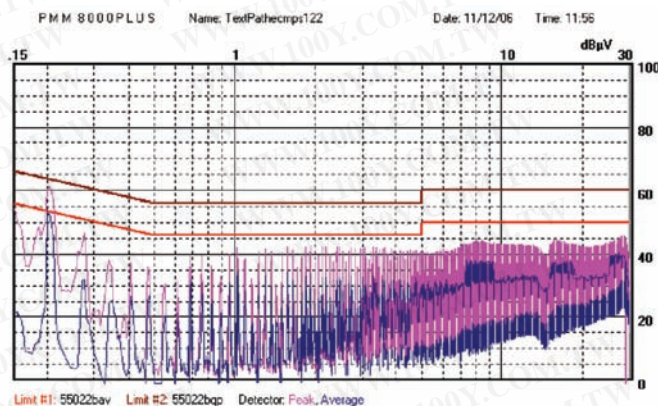

ECM100UQ44 Class I - Output floating (full load)

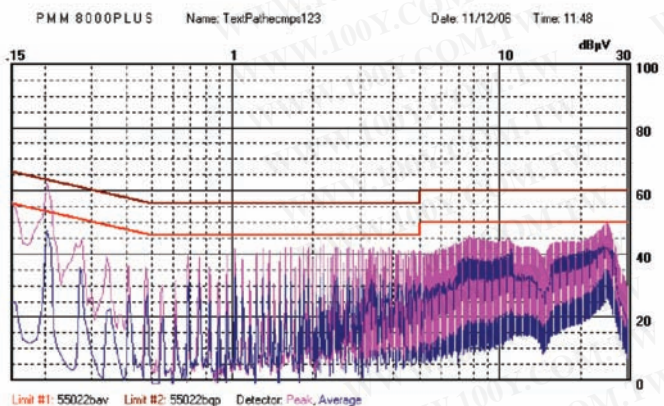

ECM100US12 Class I - Output grounded (full load)

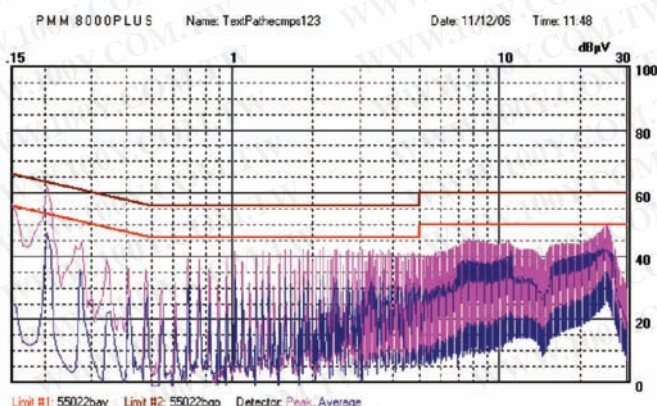


ECM100UQ44 Class I - Output grounded (full load)

Mechanical Details - Single Output Models

Weight: approx. 0.4 lb (180g)

Cover dimensions are 4.98 x 3.01 x 1.54 (126.5 x 76.4 x 39.0)

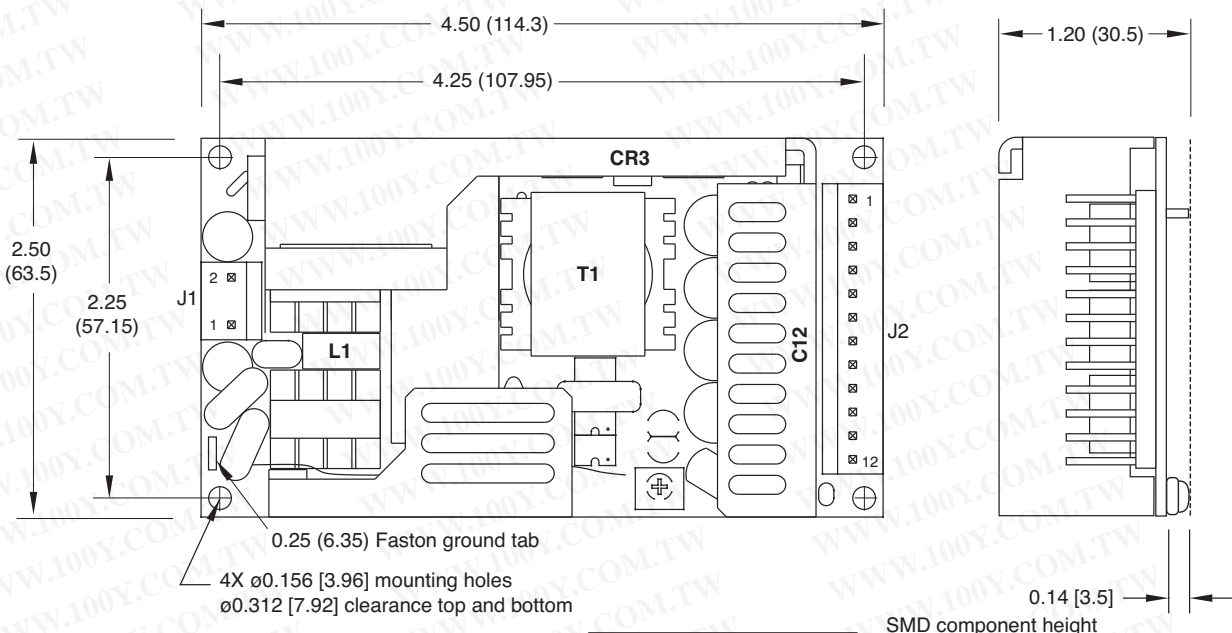

| Input Connector J1 | |
|--------------------|---------|
| Pin 1 | Line |
| Pin 2 | Neutral |

J1 mates with Molex housing 43061-0003 and Molex series 5194 crimp terminals. Ground (0.25 faston) tab standard.

| Output Connector J2 | |
|---------------------|----------|
| Pin | Single |
| 1 | +V1 |
| 2 | +V1 |
| 3 | +V1 |
| 4 | +V1 |
| 5 | V1 RTN |
| 6 | V1 RTN |
| 7 | V1 RTN |
| 8 | V1 RTN |
| 9 | NOT USED |
| 10 | NOT USED |
| 11 | NOT USED |
| 12 | NOT USED |

SMD component height

J2 mates with Molex housing 43061-0012 & Molex series 5194 crimp terminals

Notes

1. All dimensions in inches (mm). Tolerance .xx = ±0.02 (0.50); .xxx = ±0.01 (0.25)
2. Cable harness with 300mm wire available. For single output models, order part number ECM100S LOOM.
3. Mating connector kit available. Order part number ECM100 CONKIT.
4. Covers available. Order part number ECM100 COVER.

Thermal Considerations


To ensure correct and safe operation of the PSU, the temperature of the components listed in the table below must not be exceeded. See mechanical details for component locations.

| Component | Maximum Temperature |
|-----------|---------------------|
| L1 | 110 °C |
| T1 | 110 °C |
| CR3 | 120 °C |
| C12 | 95 °C |

Mechanical Details - Multi Output Models

Weight: approx. 0.4 lb (180g)

Cover dimensions are 4.98 x 3.01 x 1.54 (126.5 x 76.4 x 39.0)

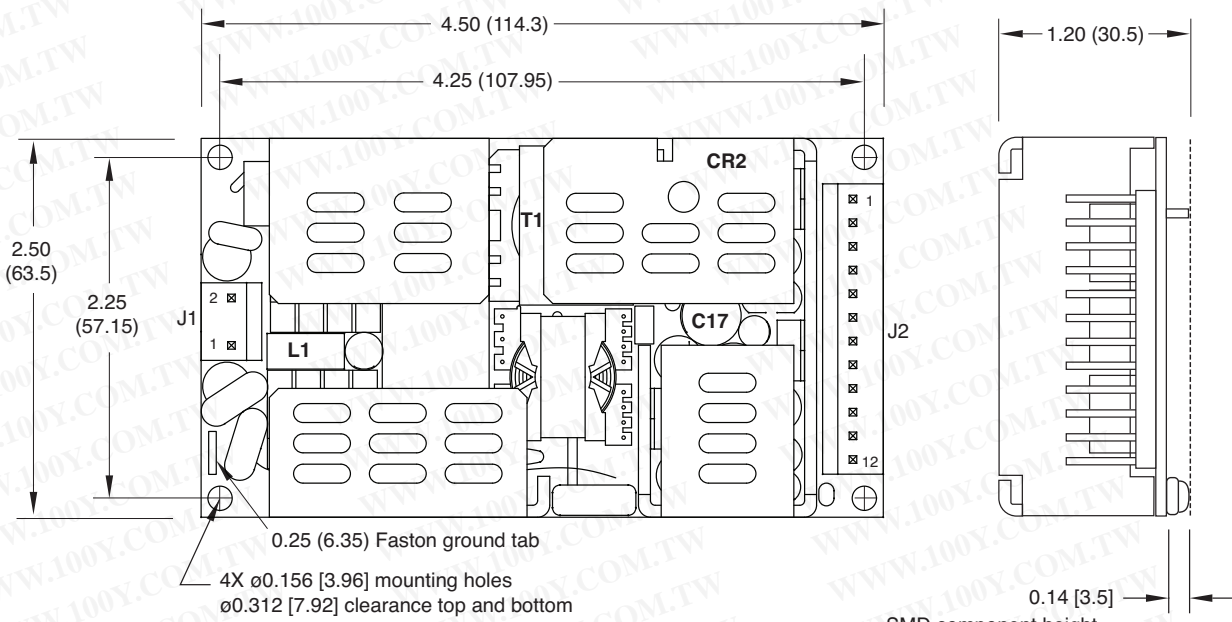

| Input Connector J1 | |
|--------------------|---------|
| Pin 1 | Line |
| Pin 2 | Neutral |

J1 mates with Molex housing 43061-0003 and Molex series 5194 crimp terminals. Ground (0.25 faston) tab standard.

| Output Connector J2 | |
|---------------------|-------|
| Pin | Multi |
| 1 | +V1 |
| 2 | +V1 |
| 3 | +V1 |
| 4 | +V1 |
| 5 | RTN |
| 6 | RTN |
| 7 | RTN |
| 8 | RTN |
| 9 | +V2 |
| 10 | +V2 |
| 11 | ±V3 |
| 12 | -V4 |

SMD component height

J2 mates with Molex Housing 43061-0012 and Molex series 5194 crimp terminals

Notes

1. All dimensions in inches (mm). Tolerance .xx = ±0.02 (0.50); .xxx = ±0.01 (0.25)
2. Cable harness with 300mm wire available. For multi output models (dual and triple output only), order part number ECM100DT LOOM.
3. Mating connector kit available. Order part number ECM100 CONKIT.
4. Covers available. Order part number ECM100 COVER.

Thermal Considerations

To ensure correct and safe operation of the PSU, the temperature of the components listed in the table below must not be exceeded. See mechanical details for component locations.

| Component | Maximum Temperature |
|-----------|---------------------|
| L1 | 110 °C |
| T1 | 110 °C |
| CR2 | 120 °C |
| C17 | 95 °C |

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)