


Features


1. Epoxy molded single in line package.
2. Mounting space reduced by one half as compared with DIP.
3. Automatic insertion compatible.
4. Completely washable.
5. Interface directly with TTL logic.
6. Diode & Magnetic shield are available.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Outside Dimension:Unit (mm)

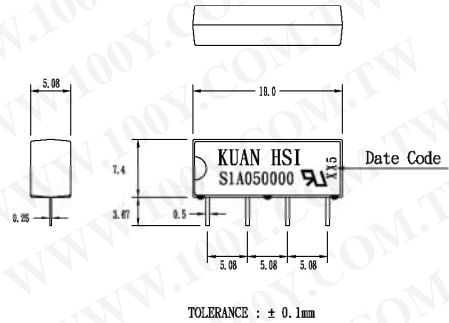

Schematic:Top View



Coil Ratings

Parameter	Rating	Unit
Coil Resistance	500	Ω (±10%)
Nominal Coil Voltage	5	VDC
Maximum Continuous Voltage	10	VDC
Must Operate	3.75	VDC
Must Release	1.0	VDC
Rated Current	10	mA

(AT 20°C)

Electrical Characteristics

Parameter	Rating	Unit
Contact Resistance	100	m Ω (max)
Operate Time	0.5	ms(max)
Bounce Time	0.5	ms(max)
Release Time	0.2	ms(max)
Insulation Resistance (100VDC)	10 ¹¹	Ω (min)
Power	10	VA(max)
Switching Voltage	200	VDC(max)
Switching Current	0.5	A(max)
Carry Current	1.0	A(max)
Breakdown Voltage (Across Open Contact)	250	VDC(min)
(Between Coil & Contact)	1000	VDC(min)
Life Expectancy (Signal Level)	10 ⁸	
Operating Temp	-40 to 85	°C
Storage Temp	-40 to 125	°C
Resonant Frequency	3.5	KHZ
Vibration (10-2000HZ)	20	g(max)
Minimum Permissible Load	100	mVDC 10 μ A