

## Instrumentation Grade SIP Reed Relay multicomp



#### Schematic View

### RoHS **Compliant**



#### **Features**

- High reliability instrumentation grade reed switch with sputtered Ruthenium contacts
- SIP 1 Form A 10W dry reed relay
- · Ideal for test and instrumentation applications
- High insulation resistance
- Molded thermoset industry standard package

Contact Form: Normally Open / 1 Form A

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787

### Http://www.100y.com.tw

#### **Coil Data**

Nominal Coil Voltage	Nominal Coil Resistance	Max. Operating Voltage	Min. Release Voltage	Max. Coil Voltage
(V DC)	± 10% Ω	(V DC)	(V DC)	(V DC)
5	500	3.75	0.8	7

#### **Contact Rating**

Switching Power (Max.) : 10W Switching Voltage (Max.) : 200V DC Switching Current (Max.) : 0.5A Carrying Current (Max.) : 1.5A

#### **Specifications**

Contact Resistance (Initial) (Max.) : 150mΩ

Operate Time - Including Bounce Time (Typ.) : 0.35ms (@ Nominal Voltage)

Release Time (Typ.) : 0.1ms Insulation Resistance @ 100V, 20°C, 40% RH :  $10^{12}\Omega$  (Min.)

: Between Open Contacts 200V DC/peak AC Dielectric Strength (Min.) Between Coil to Contacts 1500V DC/peak AC


Capacitance Between Open Contacts (Typ.) : 0.5pF Vibration : 20G Shock : 50G

**Operating Temperature** : -40°C to +85°C Storage Temperature : -40°C to +100°C

: 100 × 10<sup>6</sup> ops (1V DC, 10mA) Life Expectancy @ Specified Load (Typ.)

# Instrumentation Grade SIP Reed Relay multicomp

#### **Dimensions**

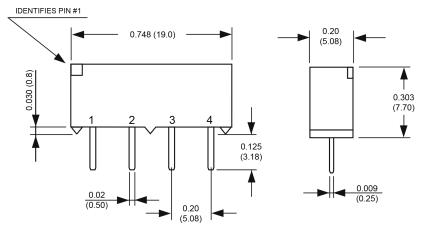

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787

Http://www. 100y. com. tw

Dimensions: Inches (Millimetres)

#### **Part Number Table**

Description	Part Number
Reed Relay, SPST-NO, 5V DC, 500Ω, 200V DC, 0.5A, THT	MC3570-1333-051

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell Limited 2016.