


# NAIS

## 20A Power Relay For Home appliances

# LF-RELAYS

### FEATURES

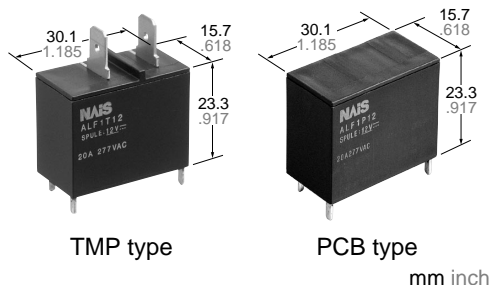

- 1. Ideal for compressor and inverter loads**
  - 1) Compressor load: 20A 250V AC
  - 2) Inverter load: 20A 100V AC, 10A 200V AC
- 2. High insulation resistance**
  - Creepage distance and clearances between contact and coil; Creepage Min. 9.5mm .374inch/Clearance Min. 8mm .315inch
  - Surge withstand voltage: Min. 10,000V
- 3. "PCB" and "TMP" types available**

- 4. Conforms to the various safety standards:**  
UL/CSA, TÜV, VDE approved

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### SPECIFICATIONS

Contact		
Arrangement		1 Form A
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)		100 mΩ
Contact material		Silver alloy
Rating (resistive load)	Nominal switching capacity	20 A 250V AC
	Max. switching power	6,250 V A
	Max. switching voltage	250V AC
	Max. switching current	25 A
Expected life (min. operations)	Mechanical (at 180 cpm)	2 × 10 <sup>6</sup>
	Electrical (at 20 cpm) (Resistive load)	10 <sup>5</sup>

Coil		
Nominal operating power		900 mW

**Remarks**

\* Specifications will vary with foreign standards certification ratings.  
 \*1 Measurement at same location as "Initial breakdown voltage" section.  
 \*2 Detection current: 10mA  
 \*3 Wave is standard shock voltage of ±1.2 × 50μs according to JEC-212-1981  
 \*4 Excluding contact bounce time.  
 \*5 Half-wave pulse of sine wave: 11 ms; detection time: 10 μs  
 \*6 Half-wave pulse of sine wave: 6 ms  
 \*7 Detection time: 10 μs  
 \*8 Refer to 5. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 24).

Characteristics		
Max. operating speed (at rated load)		20 cpm
Initial insulation resistance*1		Min. 1,000 MΩ (at 500 V DC)
Initial breakdown voltage*2	Between open contacts	1,000 Vrms for 1 min.
	Between contacts and coil	5,000 Vrms for 1 min.
Surge voltage between contact and coil*3		Min. 10,000 V
Operate time*4 (at nominal voltage)		Approx. 15ms
Release time (without diode)*4 (at nominal voltage)		Approx. 15ms
Temperature rise (at nominal voltage)		Max. 45°C (resistance method, contact current 20 A, rated coil voltage, 60°C 140°F)
Shock resistance	Functional*5	Min. 100 m/s <sup>2</sup> {10 G}
	Destructive*6	Min. 1,000 m/s <sup>2</sup> {100 G}
Vibration resistance	Functional*7	10 to 55Hz at double amplitude of 1.5mm
	Destructive	10 to 55Hz at double amplitude of 1.5mm
Conditions for operation, transport and storage*8 (Not freezing and condensing at low temperature)	Ambient temp.	-40°C to +60°C -40°F to +140°F
	Humidity	5 to 85% R.H.
Unit weight		Approx. 23 g .81 oz

### TYPICAL APPLICATIONS

- Air conditioner
- Refrigerators
- OA equipment

### ORDERING INFORMATION

Ex. A LF 1 T 12

Product Name	Contact arrangement	Terminal shape	Coil voltage, V DC
LF	1: 1 Form A	T: TMP type	05: 5
			12: 12
		P: PCB type	06: 6
			18: 18
			09: 9
			24: 24

Note: Standard packing; Carton: 50 pcs. Case 200 pcs.  
 UL/CSA, VDE, TÜV approved type is standard.

**TYPES**

Contact arrangement	Coil voltage, V DC	TMP type	PCB type
1 Form A	5	ALF1T05	ALF1P05
	6	ALF1T06	ALF1P06
	9	ALF1T09	ALF1P09
	12	ALF1T12	ALF1P12
	18	ALF1T18	ALF1P18
	24	ALF1T24	ALF1P24



**COIL DATA**

Nominal voltage, V DC	Pick-up voltage, V DC (max.)	Drop-out voltage, V DC (min.)	Coil resistance, Ω(±10%)	Nominal operating current, mA (±10%)	Nominal operating power, W	Maximum allowable voltage, V DC
5	3.5	0.5	27.8	180	0.9	5.5
6	4.2	0.6	40	150		6.6
9	6.3	0.9	90	100		9.9
12	8.4	1.2	160	75		13.2
18	12.6	1.8	360	50		19.8
24	16.8	2.4	640	37.5		26.4


**DIMENSIONS**

mm inch

**1. TMP type**

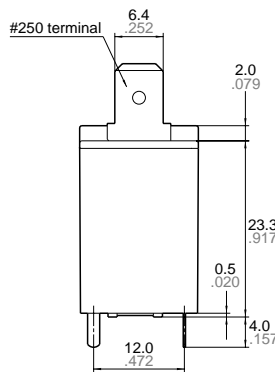
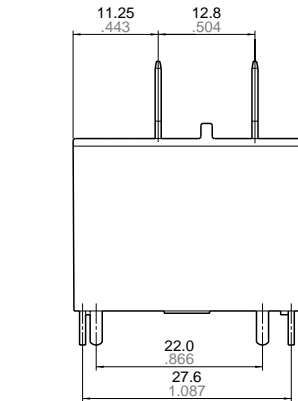


**PC board pattern (Bottom view)**

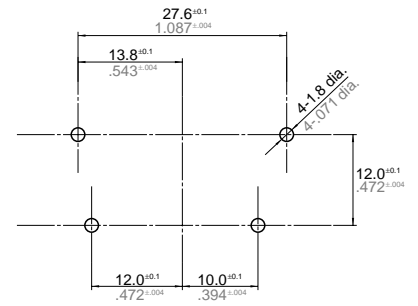

Tolerance : ±0.1 ±.004

**Schematic (Bottom view)**

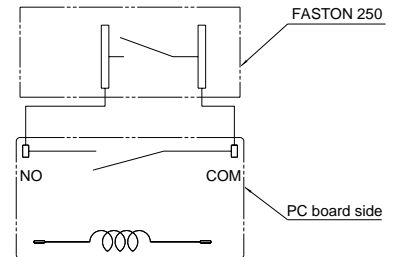



**Dimension :**

Max. 1mm .039 inch:  
1 to 3mm .039 to .118 inch:  
Min. 3mm .118 inch:


**Tolerance**

±0.1 ±.004  
±0.2 ±.008  
±0.3 ±.012

**2. PCB type**

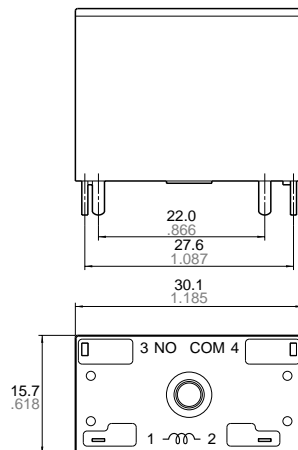


**PC board pattern (Bottom view)**

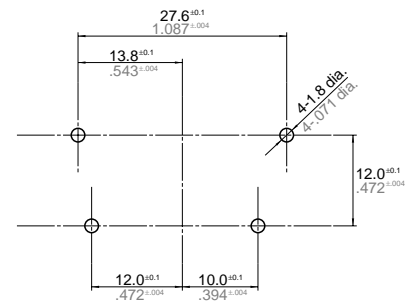

Tolerance : ±0.1 ±.004

**Schematic (Bottom view)**



**Dimension :**

Max. 1mm .039 inch:  
1 to 3mm .039 to .118 inch:  
Min. 3mm .118 inch:

**Tolerance**


±0.1 ±.004  
±0.2 ±.008  
±0.3 ±.012

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

REFERENCE DATA



1. Coil temperature rise

Sample: ALF1T12, 6 pcs.  
 Point measured: coil inside  
 Contact current: 20A  
 Ambient temperature: 25°C 77°F, 60°C 140°F

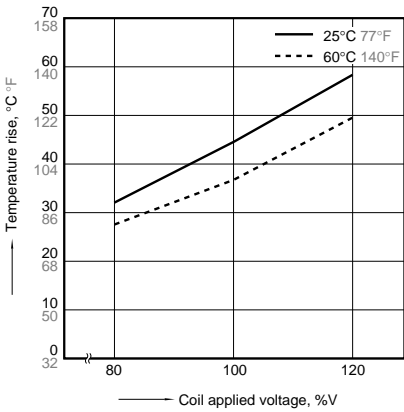



2-(1). 200V AC electrical life test

(200V AC, inverter load)  
 Sample: ALF1T12, 6 pcs.  
 Load: Inrush 102A (wave peak value),  
 Steady 14.4A (wave peak value)  
 Inverter dummy 200V AC  
 Switching frequency: ON 1s, OFF 5s  
 Circuit:

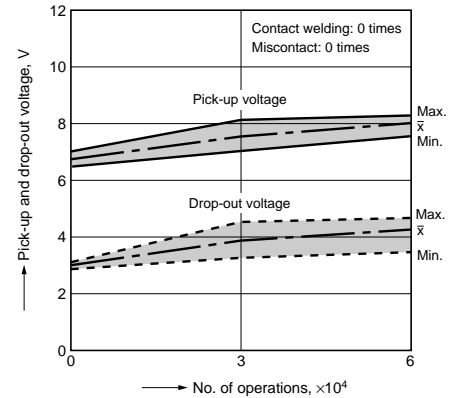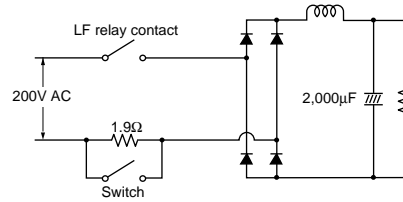

2-(2). 100V AC electrical life test



(100V AC, inverter load)  
 Sample: ALF1T12, 6 pcs.  
 Load: Inrush 224A (wave peak value),  
 Steady 30.5A (wave peak value)  
 Inverter dummy 100V AC  
 Switching frequency: ON 1s, OFF 5s  
 Circuit:

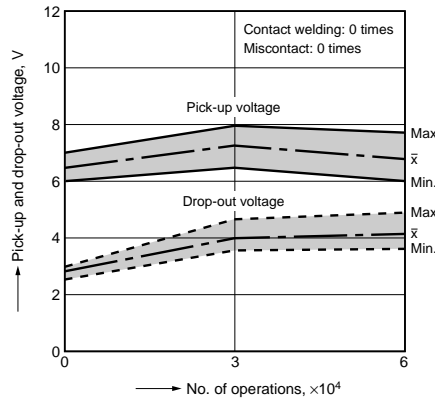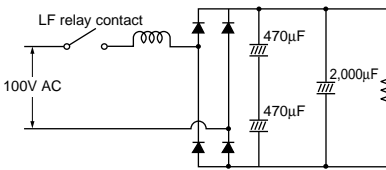

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-34970699**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)


2-(3). Inrush 70.7A, Steady 20A, 250V AC

electrical life test  
 (Compressor dummy load)  
 Sample: ALF1T12, 3 pcs.  
 Load: Inrush 70.7A, cosφ = 0.7  
 Steady 20A, cosφ 0.9  
 250V AC compressor dummy  
 Switching frequency: ON 1.5s, OFF 1.5s  
 Circuit:

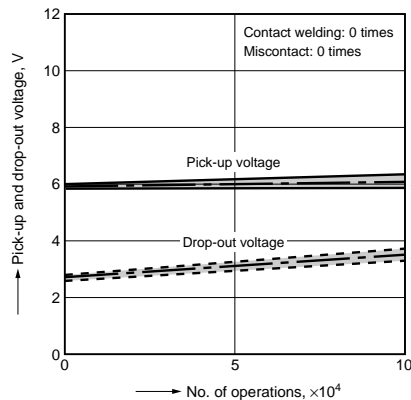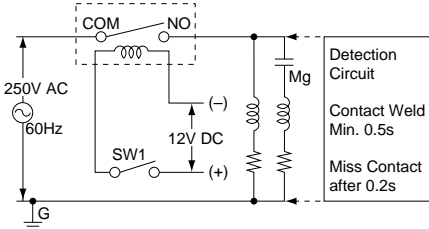

2-(4). Electrical life test

(20A 250V AC, resistive load)  
 Sample: ALF1T12, 6 pcs.  
 Switching frequency: ON 1.5s, OFF 1.5s

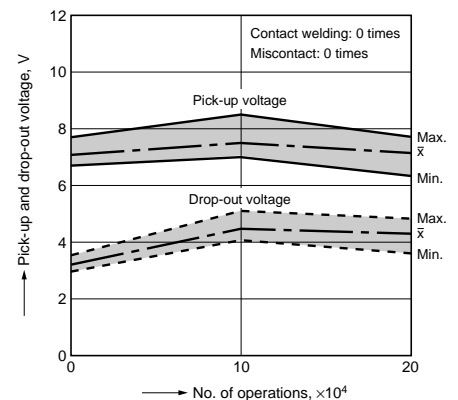

For Cautions for Use, see Relay Technical Information (Page 11 to 39).