



勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

**Miniature SOP6-pin type
with high capacity
of 3.3A load current**

**PhotoMOS®
HE SOP 1 Form A
High Capacity (AQV25OG3S)**



FEATURES

1. High capacity in a miniature SOP package

Continuous load current: Max. 3.3A

Load voltage: 60V and 100V

2. Greatly improved specifications allow you to use this in place of mercury and mechanical relays.

TYPICAL APPLICATIONS

- Security equipment
- Fire-preventing system
- Industrial machine
- Thermostat (HVAC temperature controller)

RoHS compliant

TYPES

	Output rating*		Package	Part No.			Packing quantity	
				Surface-mount terminal				
	Load voltage	Load current		Tube packing style	Tape and reel packing style		Tube	Tape and reel
AC/DC dual use	New 60 V	3.3 A			AQV252G3S	AQV252G3SX	AQV252G3SZ	1 tube contains: 75 pcs. 1 batch contains: 1,500 pcs.
	New 100 V	2.2 A	SOP6-pin		AQV255G3S	AQV255G3SX	AQV255G3SZ	

Note: For space reasons, the two initial letters of the part number "AQ" and the packing style indicator "X" or "Z" are not marked on the device.

* Indicate the peak AC and DC values.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV252G3S	AQV255G3S	Remarks
Input	LED forward current	I _F	A	50 mA		
	LED reverse voltage	V _R		5 V		
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}		75 mW		
Output	Load voltage (peak AC)	V _L		60 V	100 V	
	Continuous load current	I _L	A	3.3 A	2.2 A	A connection: Peak AC, DC B, C connection: DC
			B	3.5 A	2.4 A	
			C	6.6 A	4.4 A	
	Peak load current	I _{peak}		10 A	6.6 A	100ms (1 shot), V _L = DC at A connection
	Power dissipation	P _{out}		450 mW		
	Total power dissipation	P _T		500 mW		
	I/O isolation voltage	V _{iso}		1,500 Vrms		
Ambient temperature	Operating	T _{opr}		−40 to +85°C −40 to +185°F		(Non-icing at low temperatures)
	Storage	T _{stg}		−40 to +100°C −40 to +212°F		

HE SOP 1 Form A High Capacity (AQV25OG3S)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV252G3S	AQV255G3S	Condition
Input	LED operate current	Typical	I_{Fon}	—	0.5 mA	$I_L = 100\text{mA}$
		Maximum			3 mA	
	LED turn off current	Minimum	I_{Foff}	—	0.2 mA	$I_L = 100\text{mA}$
		Typical			0.4 mA	
Output	LED dropout voltage	Typical	V_F	—	1.32 V (1.14 V at $I_F = 5 \text{ mA}$)	$I_F = 50 \text{ mA}$
		Maximum			1.5 V	
	On resistance	Typical	R_{on}	A	0.033 Ω	A connection $I_F = 5 \text{ mA}, I_L = \text{Max. Within } 1 \text{ s}$
		Maximum			0.06 Ω	
		Typical	R_{on}	B	0.017 Ω	B connection $I_F = 5 \text{ mA}, I_L = \text{Max. Within } 1 \text{ s}$
		Maximum			0.04 Ω	
		Typical	R_{on}	C	0.0095 Ω	C connection $I_F = 5 \text{ mA}, I_L = \text{Max. Within } 1 \text{ s}$
		Maximum			0.02 Ω	
Transfer characteristics	Off state leakage current	Maximum	I_{Leak}	—	1 μA	$I_F = 0 \text{ mA}, V_L = \text{Max.}$
	Turn on time*	Typical	T_{on}	—	1.8 ms	$I_F = 5 \text{ mA}, I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
		Maximum			5 ms	
	Turn off time*	Typical	T_{off}	—	0.15 ms	$I_F = 5 \text{ mA}, I_L = 100 \text{ mA}$ $V_L = 10 \text{ V}$
		Maximum			0.5 ms	
	I/O capacitance	Typical	C_{iso}	—	0.8 pF	$f = 1 \text{ MHz}$ $V_B = 0 \text{ V}$
		Maximum			1.5 pF	
	Initial I/O isolation resistance	Minimum	R_{iso}	—	1,000 MΩ	500 V DC
	Max. operating frequency	Maximum	—	—	2.5 cps	$I_F = 5 \text{ mA, duty} = 50\%$ $I_L = \text{Max., } V_L = \text{Max.}$

*Turn on/Turn off time

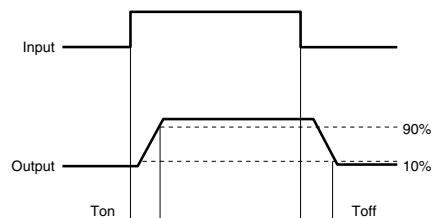

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.


Item		Symbol	Min.	Max.	Unit
AQV252G3S	LED current	I_F	5	30	mA
	Load voltage (Peak AC)	V_L	—	48	V
AQV255G3S	Continuous load current (A connection)	I_L	—	3.3	A
	Load voltage (Peak AC)	V_L	—	80	V
	Continuous load current (A connection)	I_L	—	2.2	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics
 Sample: AQV252G3S
 Allowable ambient temperature: -40 to +85°C
 -40 to +185°F

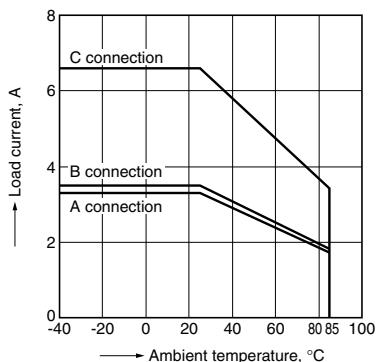


1.-(2) Load current vs. ambient temperature characteristics
 Sample: AQV255G3S
 Allowable ambient temperature: -40 to +85°C
 -40 to +185°F

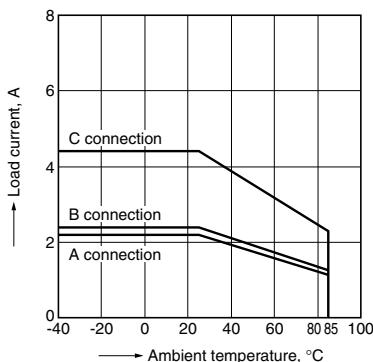


2. On resistance vs. ambient temperature characteristics
 Measured portion: between terminals 4 and 6;
 LED current: 5 mA; Load voltage: Max. (DC)
 Continuous load current: Max. (DC)

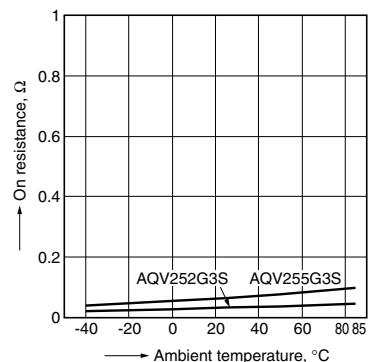


3. Turn on time vs. ambient temperature characteristics
 Tested sample: All;
 LED current: 5 mA; Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

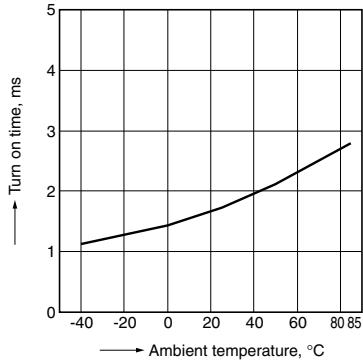


4. Turn off time vs. ambient temperature characteristics
 LED current: 5 mA; Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

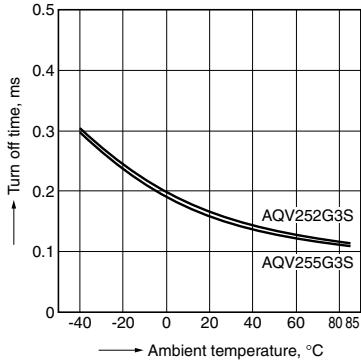


5. LED operate current vs. ambient temperature characteristics
 Tested sample: All;
 Load voltage: 10 V (DC);
 Continuous load current: 100mA (DC)

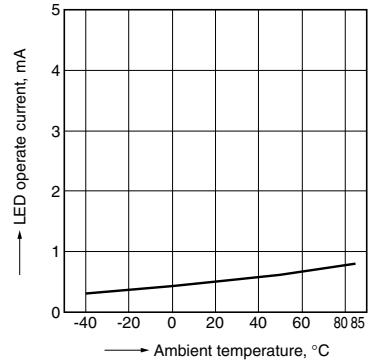


6. LED turn off current vs. ambient temperature characteristics
 Tested sample: All;
 Load voltage: 10 V (DC);
 Continuous load current: 100mA (DC)

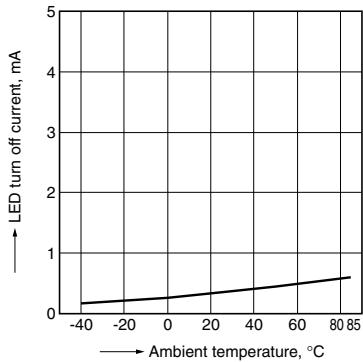

7. LED dropout voltage vs. ambient temperature characteristics
 LED current: 5 to 50 mA

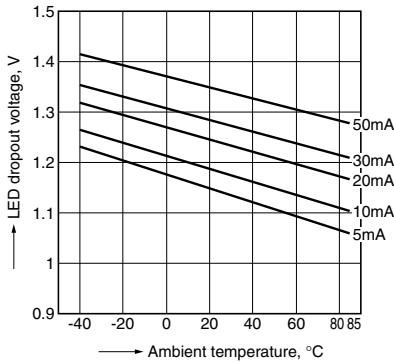


8. Current vs. voltage characteristics of output at MOS portion
 Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

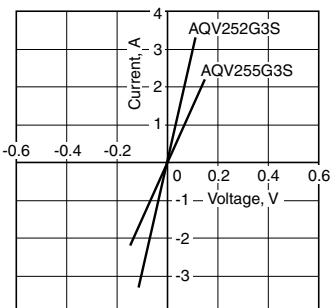

HE SOP 1 Form A High Capacity (AQV25OG3S)


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F

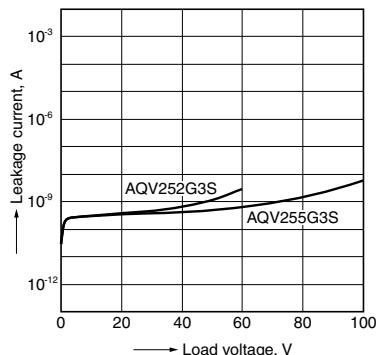


10. Turn on time vs. LED forward current characteristics

Tested sample: All;
Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

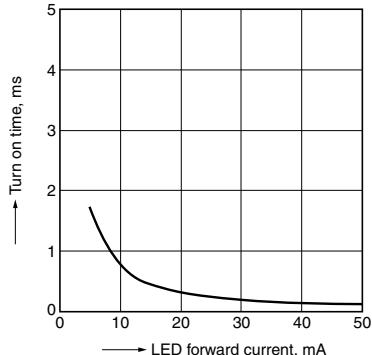


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

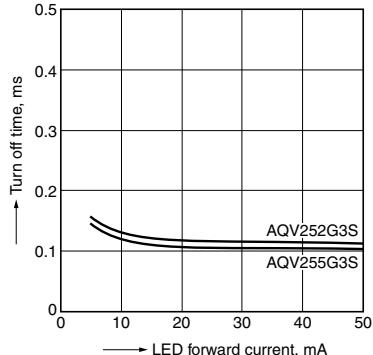


12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

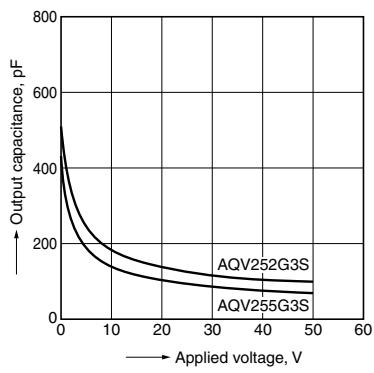

13. Max. operating frequency vs. load voltage and load current characteristics

LED current: 5 mA
Ambient temperature: 25°C 77°F

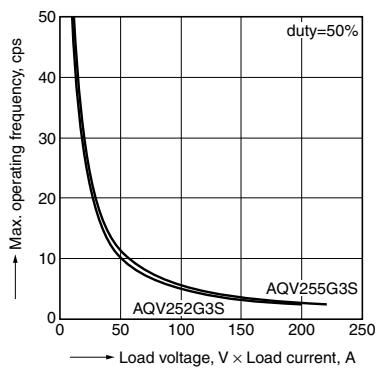

勝特力電材超市-龍山店 886-3-5773766

勝特力電材超市-光復店 886-3-5729570

胜特力电子(上海) 86-21-34970699

胜特力电子(深圳) 86-755-83298787

<http://www.100y.com.tw>

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017