

New Series with 350-V Load Voltage

- Upgraded G3VM-3 Series.
- Continuous load current of 120 mA
- Dielectric strength of 2,500 Vrms between I/O.
- Operating time of 0.3 ms (typical).

Application Examples

- Measurement devices
- Security systems
- Amusement machines



NEW  Approval pending

Note: The actual product is marked differently from the image shown here.


List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO	PCB terminals	350 VAC	G3VM-351B	50	---
	Surface-mounting terminals		G3VM-351E		
			G3VM-351E(TR)	---	1,500


Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-351B

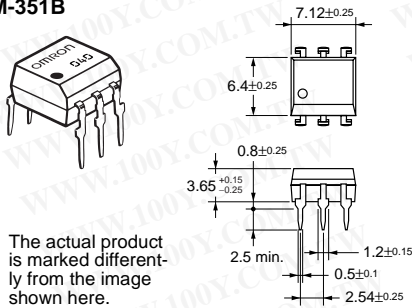


G3VM-351E

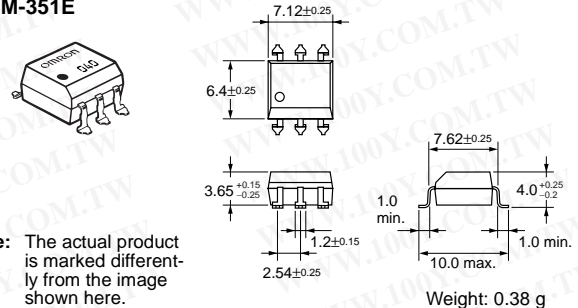


Terminal Arrangement/Internal Connections (Top View)

G3VM-351B




G3VM-351E




PCB Dimensions (Bottom View)

G3VM-351B



Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-351E




Absolute Maximum Ratings (Ta = 25°C)

Item			Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current		I _F	50	mA	
	Repetitive peak LED forward current		I _{FP}	1	A	100 μs pulses, 100 pps
	LED forward current reduction rate		Δ I _F /°C	-0.5	mA/°C	T _a ≥ 25°C
	LED reverse voltage		V _R	5	V	
	Connection temperature		T _j	125	°C	
Output	Output dielectric strength		V _{OFF}	350	V	
	Continuous load current	Connection A	I _O	120	mA	
		Connection B		120		
		Connection C		240		
	ON current reduction rate	Connection A	Δ I _{ON} /°C	-1.2	mA/°C	T _a ≥ 25°C
		Connection B		-1.2		
		Connection C		-2.4		
	Connection temperature		T _j	125	°C	
Dielectric strength between input and output (See note 1.)			V _{I-O}	2,500	V _{rms}	AC for 1 min
Operating temperature			T _a	-40 to +85	°C	With no icing or condensation
Storage temperature			T _{stg}	-55 to +125	°C	With no icing or condensation
Soldering temperature (10 s)			---	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

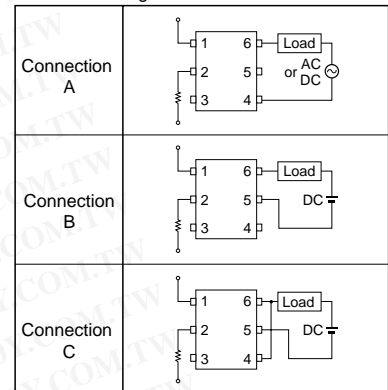

Electrical Characteristics (Ta = 25°C)

Item			Symbol	Mini- mum	Typical	Maxi- mum	Unit	Measurement conditions	
Input	LED forward voltage		V_F	1.0	1.15	1.3	V	$I_F = 10\text{ mA}$	
	Reverse current		I_R	---	---	10	μA	$V_R = 5\text{ V}$	
	Capacity between terminals		C_T	---	30	---	pF	$V = 0, f = 1\text{ MHz}$	
	Trigger LED forward current		I_{FT}	---	1	3	mA	$I_O = 120\text{ mA}$	
Output	Maximum resistance with output ON	Connection A	R_{ON}	---	25	35	Ω	$I_F = 5\text{ mA},$ $I_O = 120\text{ mA}, t < 1\text{ s}$	
				---	35	50	Ω	$I_F = 5\text{ mA},$ $I_O = 120\text{ mA}$	
		Connection B		---	28	40	Ω	$I_F = 5\text{ mA},$ $I_O = 120\text{ mA}$	
				Connection C	---	14	20	Ω	$I_F = 5\text{ mA},$ $I_O = 240\text{ mA}$
	Current leakage when the relay is open		I_{LEAK}		---	---	1.0	μA	$V_{OFF} = 350\text{ V}$
	Capacity between I/O terminals			C_{I-O}	---	0.8	---	pF	$f = 1\text{ MHz}, V_S = 0\text{ V}$
	Insulation resistance			R_{I-O}	1,000	---	---	M Ω	$V_{I-O} = 500\text{ VDC},$ $RoH \leq 60\%$
Turn-ON time			tON	---	0.3	1.0	ms	$I_F = 5\text{ mA}, R_L = 200\text{ }\Omega,$ $V_{DD} = 20\text{ V}$ (See note 2)	
Turn-OFF time			tOFF	---	0.1	1.0	ms		

Note: 2. Turn-ON and Turn-OFF Times



Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Output dielectric strength	V_{DD}	---	---	280	V
Operating LED forward current	I_F	5	10	25	mA
Continuous load current	I_O	---	---	100	mA
Operating temperature	T_a	-20	---	65	°C

Engineering Data

Load Current vs. Ambient Temperature

G3VM-351B(E)

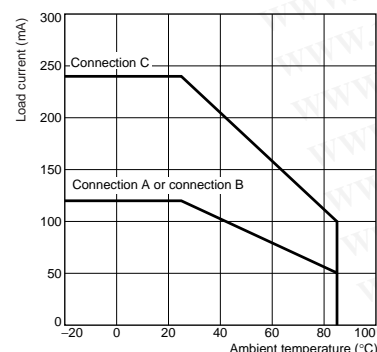

Safety Precautions

Refer to page 6 for precautions common to all G3VM models.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)