

G3VM-6□G□/61VY□

MOS FET Relays SOP 4-pin, General-purpose Type

General-purpose MOS FET Relays in SOP 4-pin packages for a wide range of applications

- Contact form: 1a (SPST-NO) or 1b (SPST-NC)
- Load voltage: 60 V

RoHS Compliant

Application Examples

- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment


- Security equipment
- Industrial equipment
- Power circuit

• A 勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Package (Unit : mm, Average)

SOP 4-pin

Special
SOP 4-pin

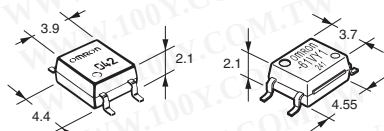

Note: The actual product is marked differently from the image shown here.

Model Number Legend

G3VM-□□□□□
1 2 3 4 5

1. Load voltage

6: 60 V

2. Contact form

- 1: 1a (SPST-NO)
3: 1b (SPST-NC)

3. Package

- G: SOP 4-pin
V: Special SOP 4-pin

4. Additional functions

- None: Dielectric strength between I/O 1500 V
Y: Dielectric strength between I/O 3750 V

5. Other informations

When specifications overlap, serial code is added in the recorded order.

Ordering Information

Package	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
					Model	Minimum package quantity	Model	Minimum package quantity
SOP4	1a (SPST-NO)	Surface-mounting Terminals	60 V	400 mA	G3VM-61G1	100 pcs.	G3VM-61G1(TR)	2500 pcs.
					G3VM-61G2		G3VM-61G2(TR)	
					G3VM-61G3		G3VM-61G3(TR)	
Special SOP 4-pin	1b (SPST-NC)	Surface-mounting Terminals	60 V	100 mA	G3VM-61VY1	125 pcs.	G3VM-61VY1(TR)	3000 pcs.
					G3VM-61VY2		G3VM-61VY2(TR05)	500 pcs.
					G3VM-61VY2		G3VM-61VY2(TR)	3000 pcs.
SOP4	1b (SPST-NC)	Surface-mounting Terminals	60 V	500 mA	G3VM-63G	100 pcs.	G3VM-63G(TR05)	500 pcs.
					G3VM-63G		G3VM-63G(TR)	3000 pcs.
					G3VM-63G		G3VM-63G(TR05)	500 pcs.

* The AC peak and DC value are given for the load voltage and continuous load current.

Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR)" or "(TR05)" to the end of the model number.

Absolute Maximum Ratings (Ta = 25°C)


Item		Symbol	G3VM-61G1	G3VM-61G2	G3VM-61G3	G3VM-61VY1	G3VM-61VY2	G3VM-63G	Unit	Measurement conditions
Input	LED forward current	IF	50			30		50	mA	Ta ≥ 25°C
	LED forward current reduction rate	ΔIF/°C	-0.5			-0.3		-0.5	mA/°C	
	LED reverse voltage	VR		5			6	5	V	
Connection temperature		Tj	125						°C	
Load voltage (AC peak/DC)		VOFF	60						V	
Output	Continuous load current (AC peak/DC)	Io	400			100	500		mA	
	ON current reduction rate	ΔIo/°C	-4.0			-1.0	-5.0		mA/°C	Ta ≥ 25°C
	Pulse ON current	Iop	1200			300	1500		mA	t=100 ms, Duty=1/10
	Connection temperature	Tj	125						°C	
Dielectric strength between I/O (See note 1.)		VI-o	1500			3750		1500	Vrms	AC for 1 min
Ambient operating temperature		Ta	-40 to +85				-40 to +110	-40 to +105	°C	With no icing or condensation
Ambient storage temperature		Tstg	-55 to +125						°C	
Soldering temperature		-	260						°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics (Ta = 25°C)

Item			Symbol	G3VM-61G1	G3VM-61G2	G3VM-61G3	G3VM-61VY1	G3VM-61VY2	G3VM-63G	Unit	Measurement conditions	
Input	LED forward voltage	V _F	Minimum	1.0			1.1		1.0	V	I _F =10 mA	
			Typical	1.15			1.27		1.15			
			Maximum	1.3			1.4		1.3			
	Reverse current	I _R	Maximum	10							μA	V _R =5 V
	Capacitance between terminals	C _T	Typical	30			50	30		pF	V=0, f=1 MHz	
	Trigger LED forward current	I _{FT} (I _{FC}) (See note 3)	Typical	1.6	0.4	—	0.2	1	0.6	mA	G3VM-61G1/61G2/61G3 : I _O =400 mA G3VM-61VY1: I _O =100 mA G3VM-61VY2: I _O =500 mA G3VM-63G : I _{OFF} =10 μA	
			Maximum	3	1	0.2	1	3				
	Release LED forward current	I _{FC} (I _{FT}) (See note 3)	Minimum	0.1		—	0.01	0.1		mA	G3VM-61G1/61G2/61G3/61VY1/61VY2: I _{OFF} =100 μA G3VM-63G: I _O =500 mA	
Typical			—		0.001	—	0.5	—				
Output	Maximum resistance with output ON	R _{ON}	Typical	1			25	1		Ω	G3VM-61G1:I _F =5 mA, I _O =400 mA G3VM-61G2:I _F =2 mA, I _O =400 mA G3VM-61G3 :I _F =0.5 mA, I _O =400 mA, t<1s G3VM-61VY1 :I _F =2 mA, I _O =100 mA, t<1s G3VM-61VY2 :I _F =5 mA, I _O =500 mA G3VM-63G: I _O =500 mA	
			Maximum	2			50	2	2.5			
	Current leakage when the relay is open	I _{LEAK}	Typical	—	1		—			nA	V _{OFF} =60 V	
			Maximum	1000								
	Capacitance between terminals	C _{OFF}	Typical	130			10	20	100	pF	G3VM-61G1/61G2/61G3/61VY1/61VY2: V=0, f=1 MHz G3VM-63G: V=0, f=1 MHz, I _F =5 mA	
	Capacitance between I/O terminals	C _{I-O}	Typical	0.8							pF	f=1 MHz, V _S =0 V
Insulation resistance between I/O terminals	R _{I-O}	Minimum	1000							MΩ	V _{I-O} =500 VDC, RoH≤60%	
		Typical	10 ⁸									
Turn-ON time	t _{ON}	Typical	0.8	3	3.5	1	0.6	0.3	ms	G3VM-61G1/63G:I _F =5 mA, R _L =200 Ω, V _{DD} =20 V (See note 2.) G3VM-61G2 :I _F =2 mA, R _L =200 Ω, V _{DD} =20 V (See note 2.) G3VM-61G3 :I _F =0.5 mA, R _L =200 Ω, V _{DD} =20 V (See note 2.) G3VM-61VY1 :I _F =2 mA, R _L =200 Ω, V _{DD} =20 V (See note 2.) G3VM-61VY2 :I _F =5 mA, R _L =200 Ω, V _{DD} =10 V (See note 2.) G3VM-61VY2 :I _F =5 mA, R _L =200 Ω, V _{DD} =20 V (See note 2.)		
		Maximum	2	8	10	5	2	1				
Turn-OFF time	t _{OFF}	Typical	0.1	1			0.1	0.7	ms			
		Maximum	0.5	3	5		0.5	3				

Note: 2. Turn-ON and Turn-OFF Times

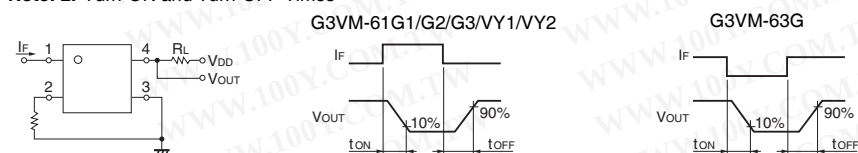

Note: 3. These values are for Relays with NC contacts

■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-61G1	G3VM-61G2	G3VM-61G3	G3VM-61VY1	G3VM-61VY2	G3VM-63G	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	48						V
Operating LED forward current	I _F	Minimum	5	—		2	5		mA
		Typical	7.5	2	0.5	5	7.5	—	
		Maximum	25			15	25		
Continuous load current (AC peak/DC)	I _O	Maximum	400	320		80	500		
Ambient operating temperature	T _a	Minimum	-20						°C
		Maximum	65				100	85	

■Spacing and Insulation


Item	G3VM-6□G□	G3VM-61VY□	Unit
	Minimum		
Creepage distances	4.0	5.0	mm
Clearance distances	4.0	5.0	
Internal isolation thickness	0.1	0.2	

Engineering Data



● LED forward current vs. Ambient temperature

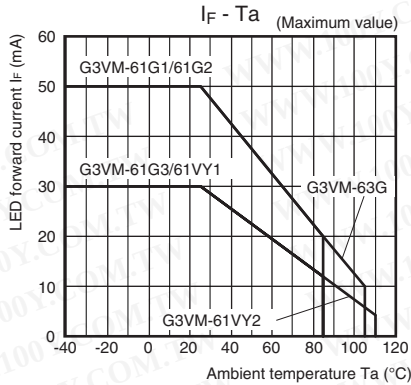



● Continuous load current vs. Ambient temperature

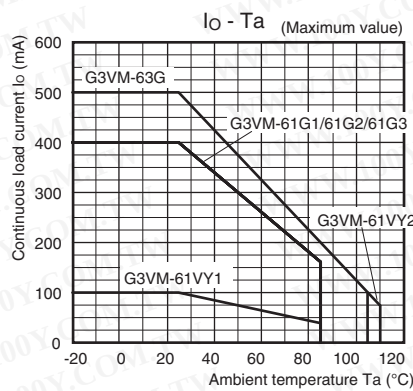


● LED forward current vs. LED forward voltage

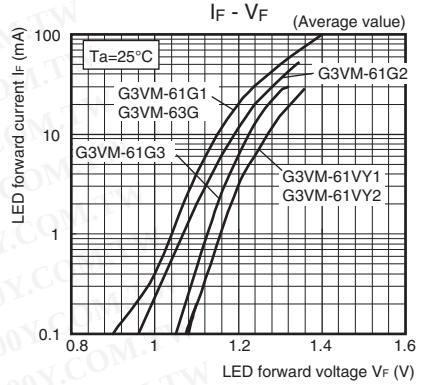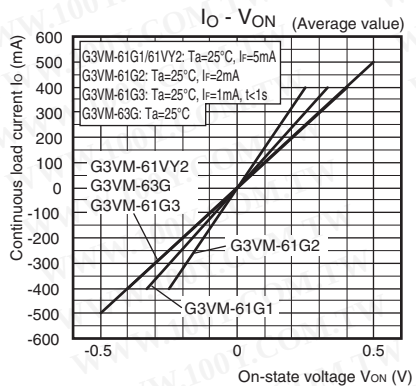● Continuous load current vs. On-state voltage
G3VM-61G1/61G2/61G3/61VY2/63G



G3VM-61VY1

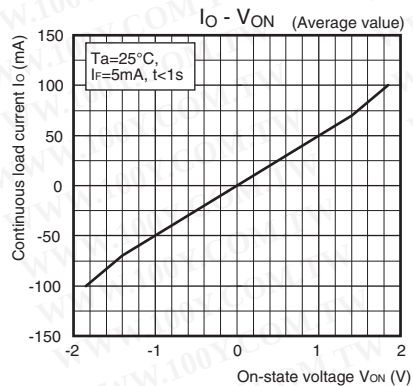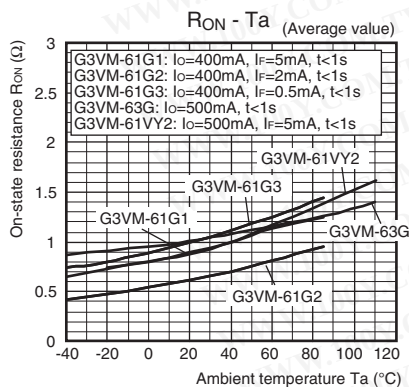● On-state resistance vs. Ambient temperature
G3VM-61G1/61G2/61G3/61VY2/63G


G3VM-61VY1

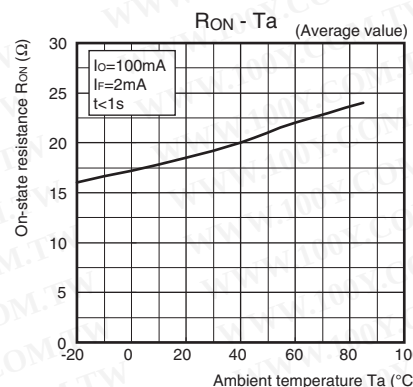

● Trigger LED forward current vs. Ambient temperature

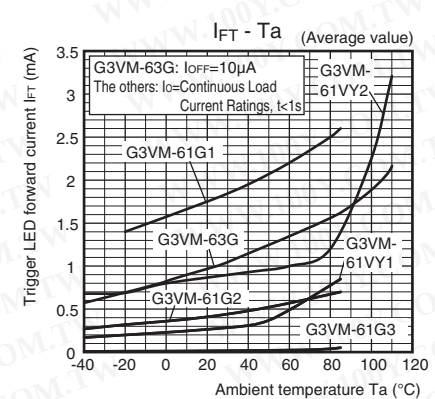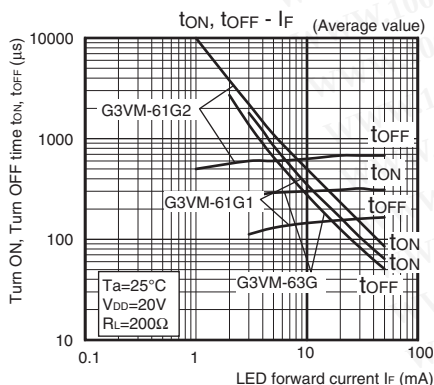● Turn ON, Turn OFF time vs. LED forward current
G3VM-61G1/61G2/63G


G3VM-61G3/61VY1/61VY2

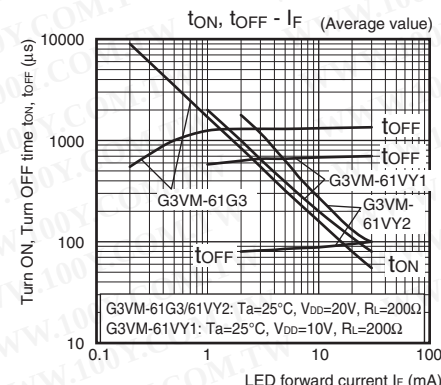


Engineering Data

● Turn ON, Turn OFF time vs. Ambient temperature


G3VM-61G1/61G2/63G/61VY2

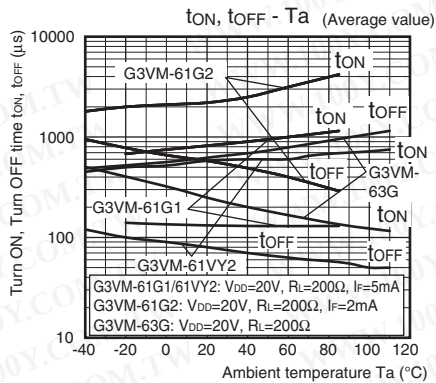

G3VM-61G3/61VY1

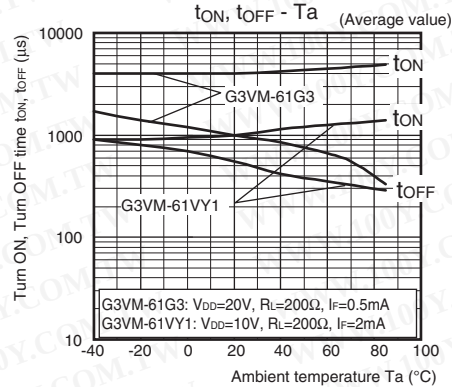


● Current leakage vs. Ambient temperature

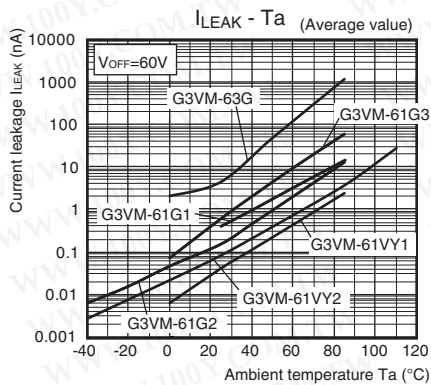

● Current leakage vs. Load voltage

G3VM-61G3/61VY1

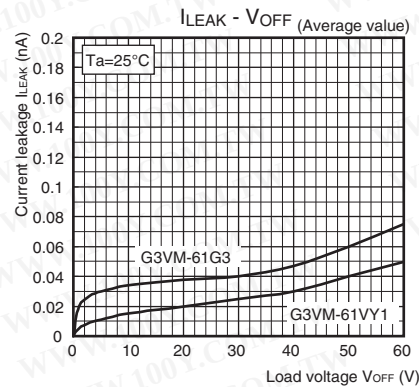


■Appearance/Terminal Arrangement/Internal Connections


●Appearance

SOP (Small Outline Package)

SOP 4-pin

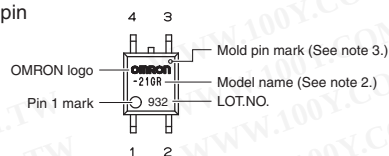


Special SOP 4-pin (G3VM-61VY1/61VY2)




Note: 1. The actual product is marked differently from the image shown here.
Note: 2. "G3VM" does not appear in the model number on the Relay.
Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.

●Terminal Arrangement/Internal Connections (Top View)

G3VM-61G1/61G2/61G3/61VY1/61VY2



G3VM-63G



■Dimensions (Unit: mm)


SOP (Small Outline Package)

SOP 4-pin




Surface-mounting Terminals

Weight: 0.1 g




Actual Mounting Pad Dimensions

(Recommended Value, Top View)




Note: The actual product is marked differently from the image shown here.

Special SOP 4-pin *(G3VM-61VY1/61VY2)




Surface-mounting Terminals

Weight: 0.1 g



Actual Mounting Pad Dimensions

(Recommended Value, Top View)



* The external dimensions are different from those of the standard SOP 4-pin, but the mounting pad dimensions are the same.

Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized



Model	Approved Standards	Contact form	File No.
G3VM-61G1 G3VM-61G2 G3VM-61G3 G3VM-61VY1 G3VM-61VY2	UL recognized	1a (SPST-NO)	E80555
G3VM-63G	UL certification is pending		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.