



### Features

- Advanced DEC DQ 1U technology and production line was introduced into from Japan .
- Small size(18.2\*10.2\*15.5mm)with 12A switching capability for high density PCB mounting.
- Surge voltage : 10000V (between coil and contact).
- Patent number : ZL 200820188817.6 , ZL 200820188818.0
- Satisfice IEC60335-1product is available.
- Satisfice IEC60079-15 product is available.

### Safety Approval

UL , C-UL File No. : E190598

TUV File No. : R50142420

CQC File No. : CQC02001002114

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

### Contact Capacity

| Model                                  | SJ-DM      | SJ-LM     |
|--|------------|-----------|
| Nominal switching capacity (res. load) | 10A 250VAC | 8A 277VAC |
| Max. switching current                 | 12A        | 12A       |
| Max. switching voltage                 | 277VAC     | 277VAC    |
| Max. switching power                   | 3,324VA    | 3,324 VA  |

### Characteristic Data

|   |   |   |
|---|---|---|
| Contact material                        | Silver alloy  |   |
| Initial contact resistance (at 6VDC 1A) | 50mΩ Max.   |   |
| Operate time (at nominal volt . )       | 10msec. Max.  |   |
| Release time (at nominal volt . )       | 5msec. Max .  |   |
| Initial insulation resistance           | 1,000MΩ Min.(DC500V)                                |   |
| Initial dielectric strength             | Between open contacts : AC1,000V , 50/60Hz 1min.    |   |
|   | Between coil and contact : AC4,000V , 50/60Hz 1min. |   |
| Vibration resistance                    | Functional  | 10 ~ 55Hz at double amplitude of 1.5 mm |
|   | Destructive   | 10 ~ 55Hz at double amplitude of 1.5 mm |
| Shock resistance                        | Functional  | 10G Min.                                |
|   | Destructive   | 100G Min.                               |
| Endurance (operations)                  | Mechanical (at 10,800 ops./h)                       | 10,000,000                              |
|   | Electrical (at 1,800 ops./h)                        | 100,000                                 |
| Ambient temperature                     | -40°C ~ +105°C (no condensation)                    |   |
| Unit weight                             | Approx. 5.7 g                                       |   |

### Coil Data (at 20°C)

| Nominal voltage (VDC) | Nominal operating current 10% ( mA) | Coil resistance 10% ( Ω) | .Max allowable voltage   | Pick-up voltage (Max.)  | Drop-out voltage (Min.) | Nominal operating power |
|-----------------------|-------------------------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|
| 3                     | 150.00                              | 20                       | 130 % of nominal voltage | 75 % of nominal voltage | 5 % of nominal voltage  | .Approx 0.45W           |
| 5                     | 90.00                               | 55                       |                          |                         |                         |                         |
| 6                     | 75.00                               | 80                       |                          |                         |                         |                         |
| 9                     | 50.00                               | 180                      |                          |                         |                         |                         |
| 12                    | 37.50                               | 320                      |                          |                         |                         |                         |
| 18                    | 25.00                               | 720                      |                          |                         |                         |                         |
| 24                    | 18.75                               | 1,280                    |                          |                         |                         |                         |

Coil Data (at 20°C)

| Nominal voltage (VDC) | Nominal operating current 10% ( mA) | Coil resistance 10% ( Ω) | Max allowable voltage    | Pick-up voltage (Max.)  | Drop-out voltage (Min.) | Nominal operating power |
|-----------------------|-------------------------------------|--------------------------|--------------------------|-------------------------|-------------------------|-------------------------|
| 3                     | 66.67                               | 45                       | 130 % of nominal voltage | 75 % of nominal voltage | 5 % of nominal voltage  | .Approx 0.2W            |
| 5                     | 40.00                               | 125                      |                          |                         |                         |                         |
| 6                     | 33.33                               | 180                      |                          |                         |                         |                         |
| 9                     | 22.22                               | 405                      |                          |                         |                         |                         |
| 12                    | 16.67                               | 720                      |                          |                         |                         |                         |
| 18                    | 14.81                               | 1,620                    |                          |                         |                         |                         |
| 24                    | 8.33                                | 2,880                    |                          |                         |                         |                         |

Safety Approval Ratings

(Note:More detail of approval ratings,please refer to the safety certification)

| Approval         | CQC   | TUV                | UL/CUL  |
|------------------|---|--------------------|---|
| File No.         | CQC02001002114  | R50142420          | E190598   |
| Approved ratings | SJ-D<br>10A 250VAC<br>12A 125/250/277VAC<br>SJ-L<br>8A 277VAC<br>12A 125/250/277VAC | SJ-D<br>10A 250VAC | SJ D<br>10A 125VAC/250VAC,Resistive<br>10A 120VAC,Resistive<br>1/3 HP 240VAC<br>TV-5,120VAC<br>Poliot Duty:240VA,240VAC<br>12A/10A 125/250/277VAC,Resistive & General use<br><br>SJ D<br>8A 277VAC Resistive<br>TV-3,120AVC<br>1/4HP 240VAC<br>Poliot Duty:120VA,240VAC<br>12A/10A 125/250/277VAC,Resistive & General use |


Ordering Information

| Nomenclature  |    |    |    |   |   |   |   |   |    |  |
|---|----|----|----|---|---|---|---|---|----|--|
| SJ  | -S | -1 | 12 | D | M | H | 1 | F | XX | Special Parameter : Nil-Standard type , Letter or number-Special requirement |
| Insulation System : Nil-Standard, B-Class B, F-Class F              |    |    |    |   |   |   |   |   |    |  |
| Contact Material : Nil-AgSnO <sub>2</sub> , 1-AgCdO , 2-AgNi        |    |    |    |   |   |   |   |   |    |  |
| Load Capacity : H-12A,10A,8A(see note)                              |    |    |    |   |   |   |   |   |    |  |
| Contact Form : M-Form A   |    |    |    |   |   |   |   |   |    |  |
| Coil Power : D-0.45W L-0.2W   |    |    |    |   |   |   |   |   |    |  |
| Coil Voltage (VDC) : 03, 05, 06, 09, 12, 18, 24                     |    |    |    |   |   |   |   |   |    |  |
| Number of Poles : 1-1 Pole  |    |    |    |   |   |   |   |   |    |  |
| Protective Construction : S-Flux proofed<br>SH-Sealed type washable |    |    |    |   |   |   |   |   |    |  |
| Type Designation : SJ   |    |    |    |   |   |   |   |   |    |  |

Note: when coil power is 0.45W, H stands for 10A;when coil power is 0.2W,H stands for 8A;12 a maximum load certification.


## Typical Applications

### Outline Dimensions, Wiring Diagram, P. C. Board Layout (unit : mm )

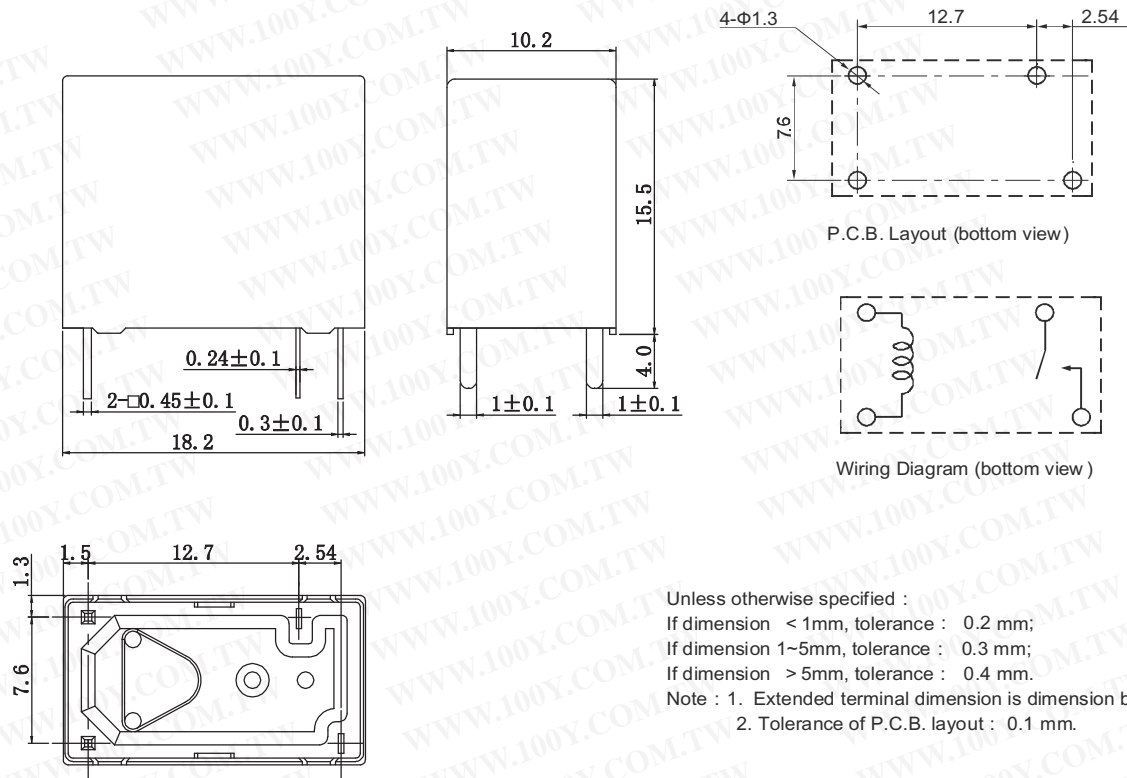

- Home appliances, office equipment, audio equipment, car, air conditioner, etc.

## Characteristic Curves

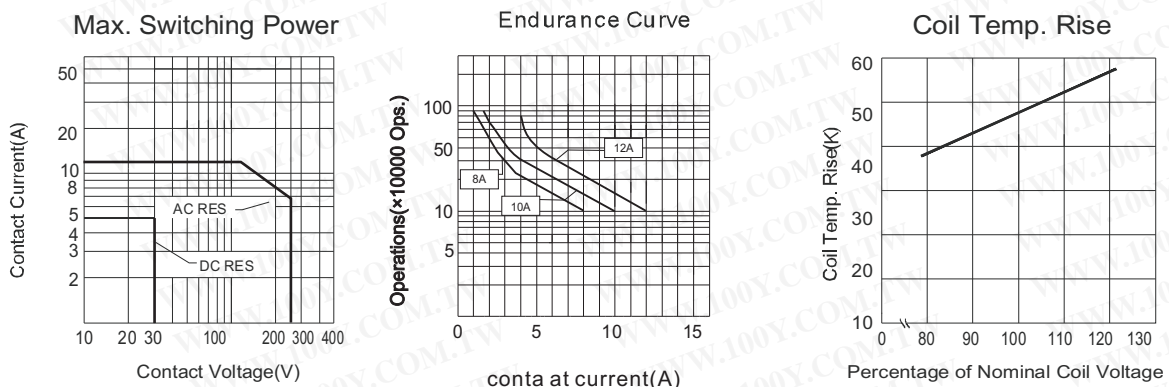

### Disclaimer:

This datasheet is the customers' reference. All the specification are subject to change without notice .  
 We could not evaluate all the performance and all the parameters for every possible application. Thus the user should in a right position to choose the suitable product for their own application. If there is any query , please contact Sanyou for the technical service. However it is the user's responsibility to determine which product should be used only.