



Features

- Sub-miniature normally open switch with 14.00mm x 2.28mm (0.551" x 0.090") glass envelope
- Longer than standard, easily formed leads
- 10^{10} Ohms insulation resistance
- Capable of switching up to 200Vdc
- Maximum contact rating 10 Watts
- Available sensitivity range 10-30 AT


Benefits

- Hermetically sealed switch contacts are not effected by and have no effect on their external environment
- Low, stable contact resistance
- Soft leads enable reliable hand forming
- Zero operating power required for contact closure
- Fit and forget durability
- Well suited to signal switching

Applications

- Reed relays
- Security
- Limit switching
- Telecoms
- Office equipment
- Household appliances

DIMENSIONS (in) mm

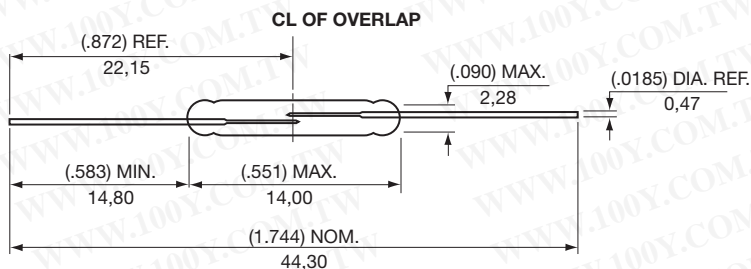

Switch Type	FLEX-14
Contact Form	A

ELECTRICAL RATINGS

Contact Rating (See note 1)		Watt - max.	10
Voltage	Switching Breakdown	Vdc - max.	200
		Vdc - min.	250
Current	Switching Carry	A - max.	0.5
		A - max.	1.0
Resistance	Contact, Initial	Ω - max.	0.100
	Insulation	Ω - min.	10^{10}
Capacitance	Contact	pF - typ.	0.2
Temperature	Operating Storage (5)	$^{\circ}\text{C}$	-40 to +125
		$^{\circ}\text{C}$	-65 to +125

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OPERATING CHARACTERISTICS

Operate Time (2)		ms - max.	0.55
Release Time (2)		ms - max.	0.20
Shock	1 ms ½ sine wave	G - max.	100
Vibration	50-2000 Hertz	G - max.	30
Resonant Frequency		Hz - typ.	5200

MAGNETIC CHARACTERISTICS

Pull-In Range (3)		Ampere Turns	10-30
Drop-out		Ampere Turns- min	5
Rating Sensitivity (4)		Ampere Turns	20
Test Coil			L4989

Notes 1) Contact rating-Product of the switching voltage and current should never exceed the wattage rating. Contact Hamlin for additional load/life information.
2) Operate (inc. bounce) /Release Time-per EIA/NARM RS421A, diode suppressed coil.

3) Pull in Range-Contact Hamlin for tolerances available within this range.
4) Rating Sensitivity-The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
5) Storage Temperature-Long time exposure at elevated temperature may degrade solderability of the leads.