

2SC3153



800V/6A Switching Regulator Applications


Features

- High breakdown voltage ($V_{CBO} \geq 900V$).
- Fast switching speed.
- Wide ASO.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Package Dimensions

unit:mm
2022A

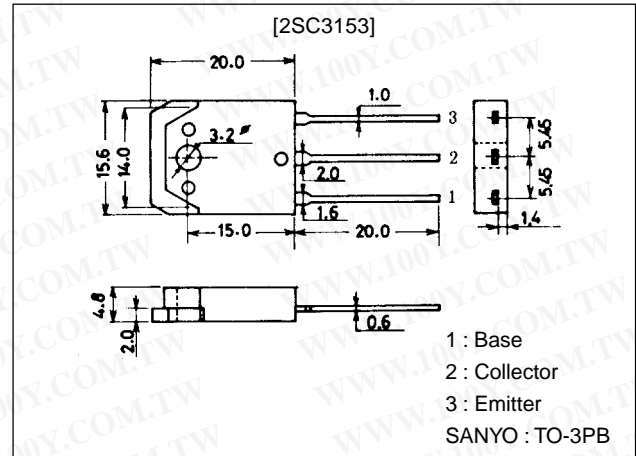

Specifications

Absolute Maximum Ratings at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings	Unit
Collector-to-Base Voltage	V_{CBO}		900	V
Collector-to-Emitter Voltage	V_{CEO}		800	V
Emitter-to-Base Voltage	V_{EBO}		7	V
Collector Current	I_C		6	A
Collector Current (Pulse)	I_{CP}	Pulse, $PW \leq 300\mu s$, Duty Cycle $\leq 10\%$	20	A
Base Current	I_B		3	A
Collector Dissipation	P_C	$T_c = 25^\circ C$	100	W
Junction Temperature	T_J		150	$^\circ C$
Storage Temperature	T_{stg}		-55 to +150	$^\circ C$

Electrical Characteristics at $T_a = 25^\circ C$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector Cutoff Current	I_{CBO}	$V_{CB} = 800V, I_E = 0$			10	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 5V, I_C = 0$			10	μA
DC Current Gain	h_{FE1}	$V_{CE} = 5V, I_C = 0.4A$	10*		40*	
	h_{FE2}	$V_{CE} = 5V, I_C = 2A$	8			
Gain-Bandwidth Product	f_T	$V_{CE} = 10V, I_C = 0.4A$		15		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10V, f = 1MHz$		120		pF

* : For the h_{FE1} of the 2SC3153, specify two ranks or more in principle.

10	K	20	15	L	30	20	M	40
----	---	----	----	---	----	----	---	----


■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.





2SC3153

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Collector-to-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=3A, I_B=0.6A$			2.0	V
Base-to-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=3A, I_B=0.6A$			1.5	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=1mA, I_E=0$	900			V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=5mA, R_{BE}=\infty$	800			V
Emitter-to-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=1mA, I_C=0$	7			V
Collector-to-Emitter Sustain Voltage	$V_{CEO(sus)}$	$I_C=6A, L=200\mu H, I_B=2A$	800			V
Collector-to-Emitter Sustain Voltage	$V_{CEX(sus)1}$	$I_C=2A, I_{B1}=0.4A, I_{B2}=-0.4A, L=1mH, \text{clamped}$	800			V
	$V_{CEX(sus)2}$	$I_C=1A, I_{B1}=0.2A, I_{B2}=-0.2A, L=2mH, \text{clamped}$	900			V
Turn-ON Time	t_{on}	$I_C=4A, I_{B1}=0.8A, I_{B2}=-1.6A, R_L=100\Omega, V_{CC}=400V$			1.0	μs
Storage Time	t_{stg}	$I_C=4A, I_{B1}=0.8A, I_{B2}=-1.6A, R_L=100\Omega, V_{CC}=400V$			3.0	μs
Fall Time	t_f	$I_C=4A, I_{B1}=0.8A, I_{B2}=-1.6A, R_L=100\Omega, V_{CC}=400V$			0.7	μs







Switching Time Test Circuit

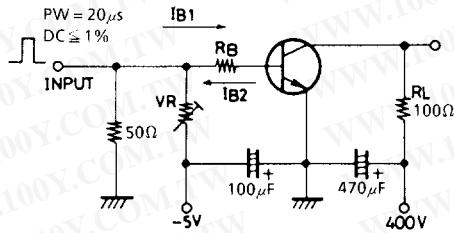

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

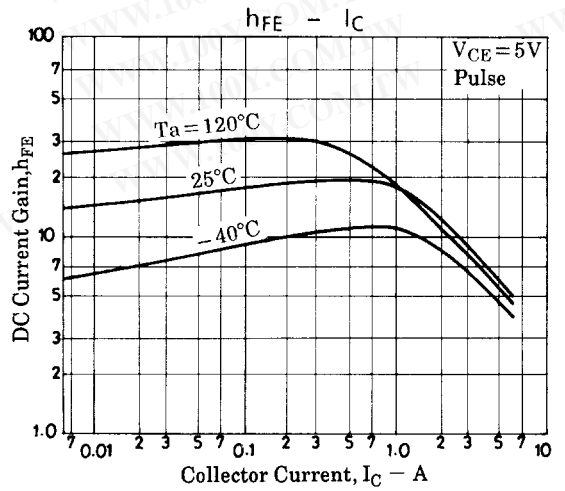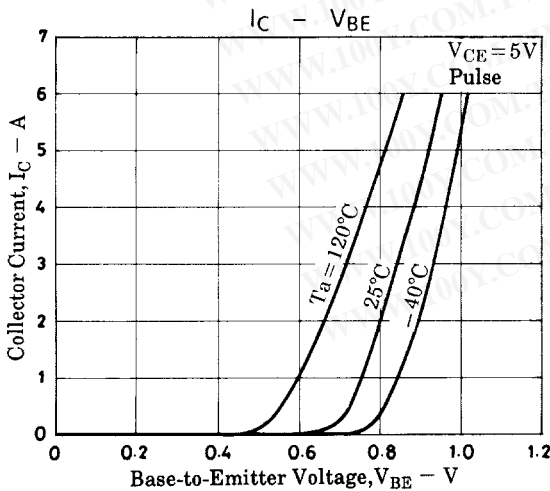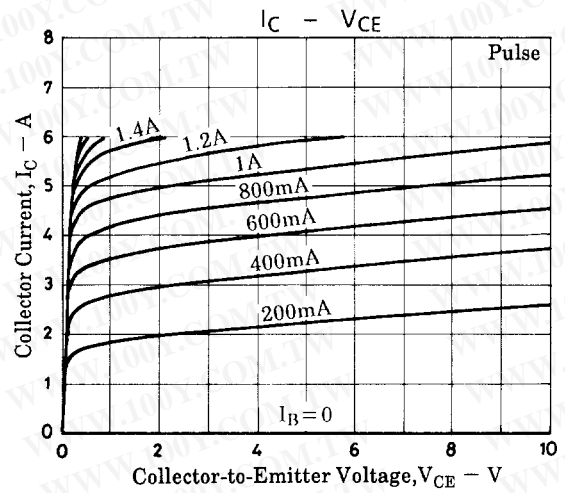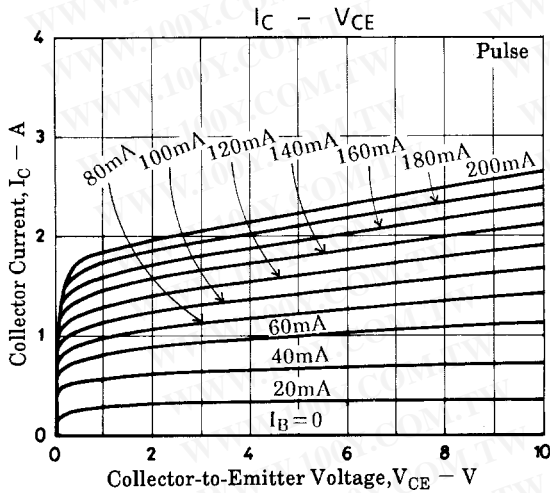

2SC3153

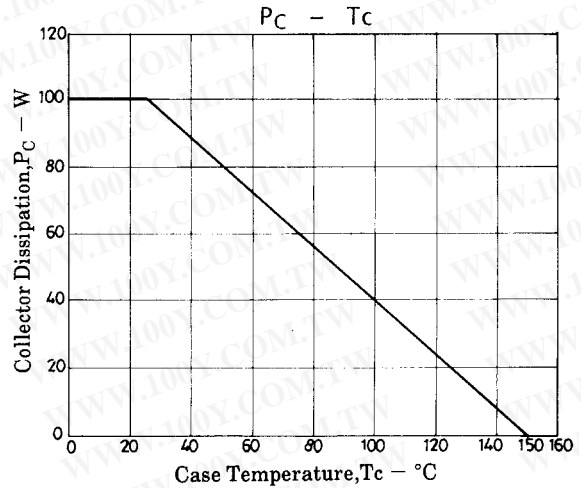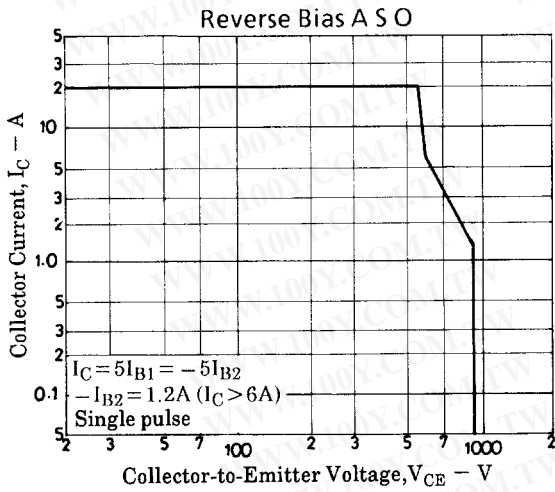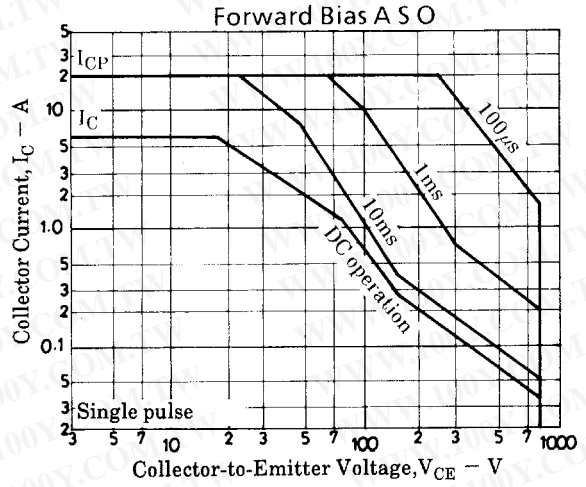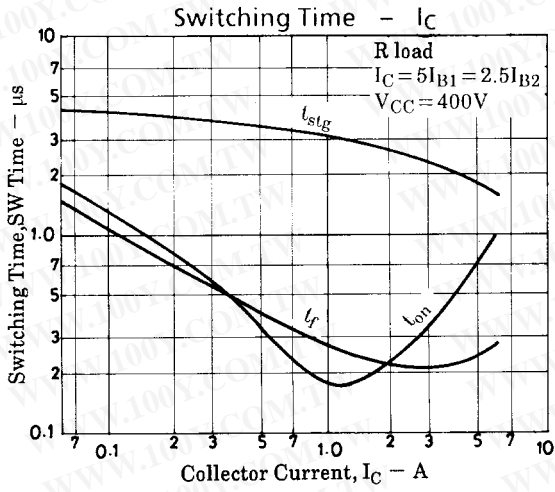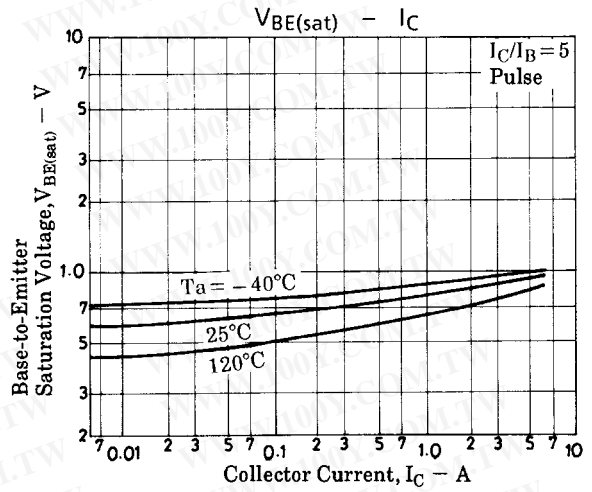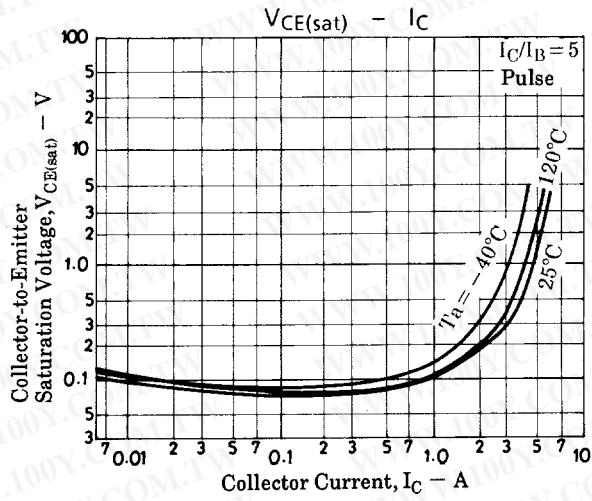

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)