


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

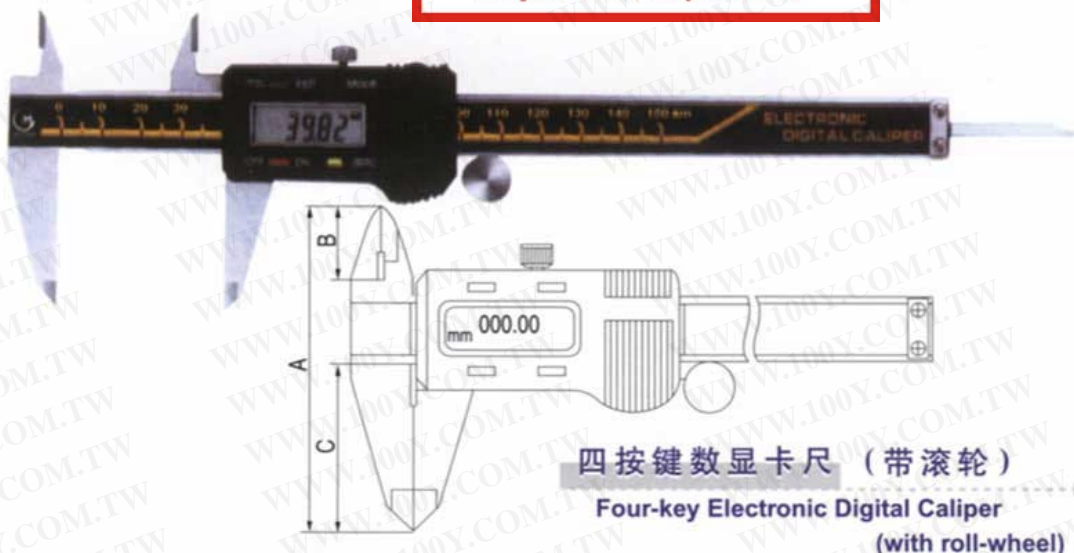

四按键数显卡尺 (带滚轮)  
 Four-key Electronic Digital Caliper  
 (with roll-wheel)

### “TOL” 数显卡尺 “TOL” Digital Calipers

主要特点:

- 带电源开关
- 任意位置清零
- 任意位置进行公英制互换
- 可以用来判定所测工件尺寸是否在卡尺预先位置的公差内
- 带数据输出

Features:

- Manual power on/off
- Zero setting at any position
- Metric/Inch system interchange at any position
- May be used to determine of the measured item's dimension is in the predetermined range in caliper
- With data output interface

订货编号	测量范围	读数值	A	B	C
Order-No.	Range mm/in	Reading mm/in	mm	mm	mm
303B-01	0-150/0-6"	0.01/0.0005"	77	16.5	40
303B-02	0-200/0-8"	0.01/0.0005"	90	19.5	50
303B-03	0-300/0-12"	0.01/0.0005"	100	21.2	55

### “ABS” 数显卡尺 “ABS” Digital Calipers

主要特点:

- 带电源开关
- 任意位置清零
- 任意位置进行公英制互换
- 任意位置进行相对测量和绝对测量的互换
- 带数据输出

Features:

- Manual power on/off
- Zero setting at any position
- Metric/Inch system interchange at any position
- Absolute measurement and relative measurement interchange at any position
- With data output interface

订货编号	测量范围	读数值	A	B	C
Order-No.	Range mm/in	Reading mm/in	mm	mm	mm
304B-01	0-150/0-6"	0.01/0.0005"	77	16.5	40
304B-02	0-200/0-8"	0.01/0.0005"	90	19.5	50
304B-03	0-300/0-12"	0.01/0.0005"	100	21.2	55

### “HOLD” 数显卡尺 “HOLD” Digital Calipers

主要特点:

- 带电源开关
- 任意位置清零
- 任意位置进行公英制互换
- 可以进行测量数据的保持
- 带数据输出

Features:

- Manual power on/off
- Zero setting at any position
- Metric/Inch system interchange at any position
- Data hold function
- With data output interface

订货编号	测量范围	读数值	A	B	C
Order-No.	Range mm/in	Reading mm/in	mm	mm	mm
305B-01	0-150/0-6"	0.01/0.0005"	77	16.5	40
305B-02	0-200/0-8"	0.01/0.0005"	90	19.5	50
305B-03	0-300/0-12"	0.01/0.0005"	100	21.2	55

### “MODE” 数显卡尺 “MODE” Digital Calipers

主要特点:

- 除具有数显卡尺的所有特点外, 还有:
- 快速显示状态(此时零点不变)
- 快速跟踪最大值或最小值

Features:

- Manual power on/off
- Zero setting at any position
- Metric/Inch system interchange at any position
- Data hold function
- Fast tracing of minimum value or maximum value during measurements
- With data output interface

订货编号	测量范围	读数值	A	B	C
Order-No.	Range mm/in	Reading mm/in	mm	mm	mm
306B-01	0-150/0-6"	0.01/0.0005"	77	16.5	40
306B-02	0-200/0-8"	0.01/0.0005"	90	19.5	50
306B-03	0-300/0-12"	0.01/0.0005"	100	21.2	55