



SPECIFICATIONS

Rating:	5A@250 VAC-UL, VDE, Nemko, Semko, Demko, Fimko, CSA 8A@125 VAC - UL, CSA 2A@250 VAC - UL, CSA 6A@24 VDC - UL, CSA
Mechanical Life:	≥100,000 cycles
Electrical Life:	≥50,000 cycles
Contact Resistance:	100mΩ max. typical; initial @ 2-4 VDC
Insulation Resistance:	> 1,000mΩ
Dielectric Strength:	> 1,500 volts 1 minute > 3,000 volts between poles
Actuation Force:	300g/pole
Operating Temp:	-20°C to 55°C




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MATERIALS


Switch Housing:	Polyetherimide (PEI)
Contact Housing:	Diallyl phthalate (DAP)
Lens:	Polycarbonate (PC)
Contacts:	Silver plated copper alloy
Terminals:	Silver plated copper alloy




PANEL MOUNTING

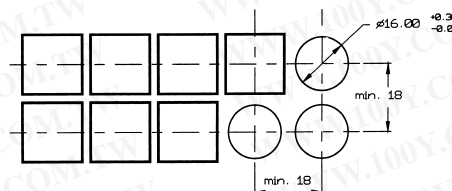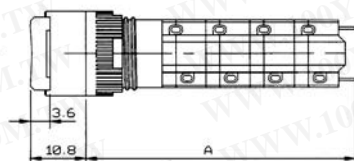

BOTTOM VIEW



SCHEMATIC



MOUNTING LENGTH

	Mounting Length (A)
SPST	29.0 mm
DPST	36.5 mm
3PST	44.0 mm
4PST	51.5 mm