

## Features

- Maximum Peak Power Dissipation: 7000 watts
- Meets ISO7637-2 / ISO16750-2 Surge specification (varies by test condition)
- RoHS compliant\*
- AEC-Q101 compliant\*\*

## Applications

- High peak power applications (up to rated limits)
- High temperature applications (up to rated limits)
- Clamping diode
- Load switching and lighting

# SM8SF-Q Transient Voltage Suppressor Diode Series

## General Information

The Model SM8SF-Q Series TVS diodes are designed to provide overvoltage protection for sensitive electronics, meeting ISO7637-2 and ISO16750-2 requirements (varies by test condition).

The Model SM8SF-Q Series offers a choice of Working Peak Reverse Voltages from 24 V to 36 V and Breakdown Voltage up to 40 V. The SM8SF-Q is available in a compact DFN package of 8.1 mm x 10.5 mm, with a low profile of just 1.3 mm, facilitating layout in today's compact PCB designs.

## Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Parameter	Symbol	Value	Unit
Maximum Peak Pulse Power Dissipation (10/1000 $\mu\text{s}$ )	$P_{PK}$	7000	W
Power Dissipation with Infinite Heatsink ( $T_C = 25^\circ\text{C}$ )	$P_D$	5	W
Operating Temperature Range	$T_J$	-55 to +175	$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +175	$^\circ\text{C}$

## Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Unidirectional Device		Bidirectional Device		Breakdown Voltage $V_{BR}$ (Volts)			Working Peak Reverse Voltage	Maximum Reverse Leakage @ $V_{RWM}$	Maximum Reverse Voltage @ $I_{RSM}$	Maximum Reverse Surge Current
Part No.	Marking	Part No.	Marking	Min.	Max.	@ $I_T$ (mA)	$V_{RWM}$ (V)	$I_R$ ( $\mu\text{A}$ )	$V_{RSM}$ (V)	$I_{RSM}$ (A)
SM8SF24A-Q	24A	SM8SF24CA-Q	24CA	26.7	29.5	5	24	10	38.9	180
SM8SF28A-Q	28A	SM8SF28CA-Q	28CA	31.1	34.4	5	28	10	45.4	154
SM8SF30A-Q	30A	SM8SF30CA-Q	30CA	33.3	36.8	5	30	10	48.4	145
SM8SF33A-Q	33A	SM8SF33CA-Q	33CA	36.7	40.6	5	33	10	53.3	131
SM8SF36A-Q	36A	SM8SF36CA-Q	36CA	40.0	44.2	5	36	10	58.1	120


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# SM8SF-Q Transient Voltage Suppressor Diode Series


**BOURNS®**

## Performance Graphs


### Load Dump Power Characteristics

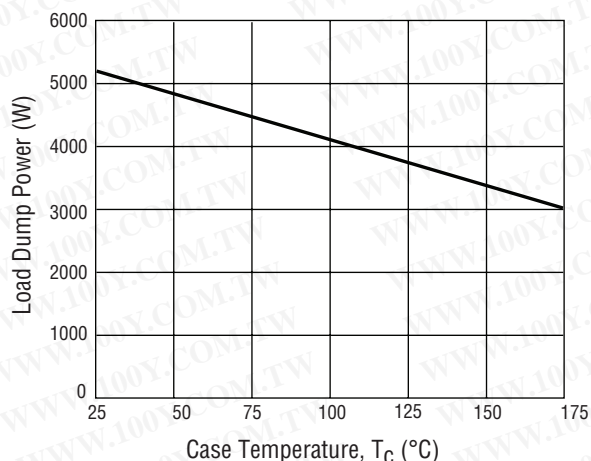


### Peak Pulse Power Derating Curve

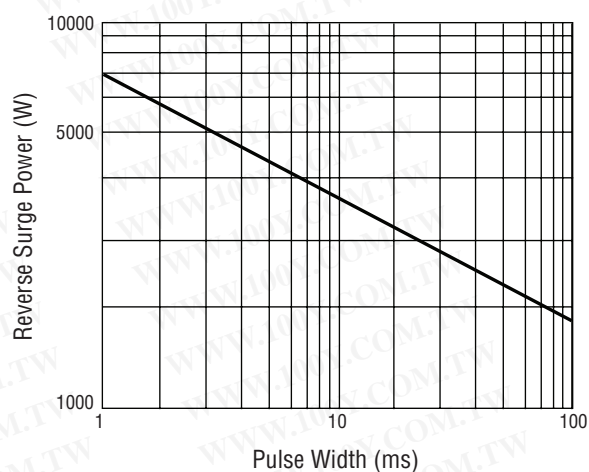


### ISO 7637-2: Pulse 5a, Single Pulse: SM8SF-24A-Q

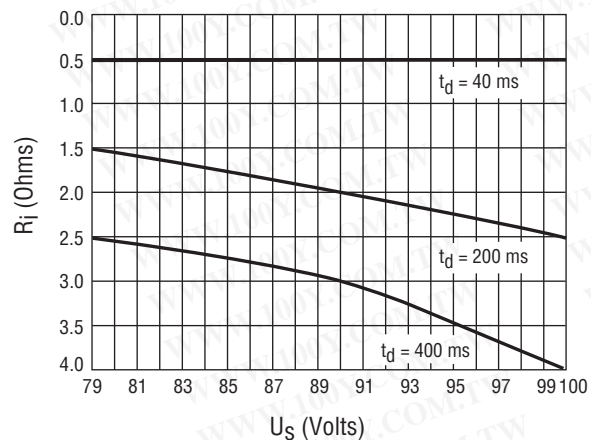

### ISO 7637-2: Pulse 5a, Single Pulse: SM8SF-33A-Q

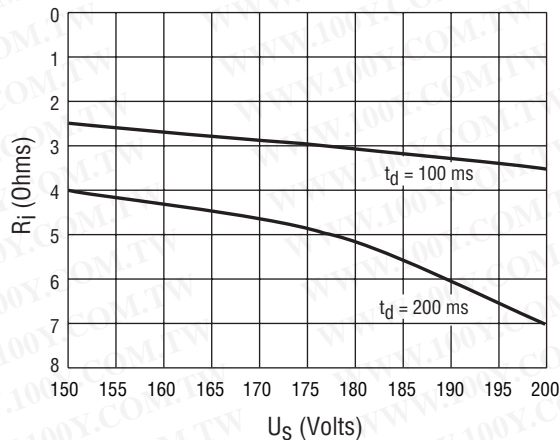

### Power Dissipation


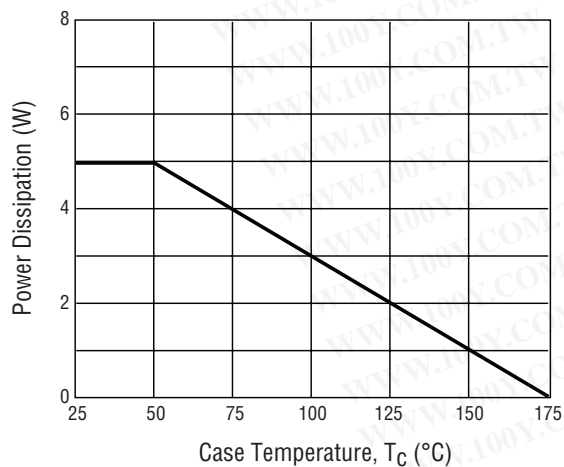


Specifications are subject to change without notice.  
Users should verify actual device performance in their specific applications.  
The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

# SM8SF-Q Transient Voltage Suppressor Diode Series





**BOURNS®**

## Product Dimensions

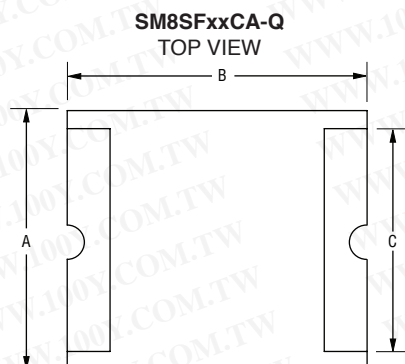
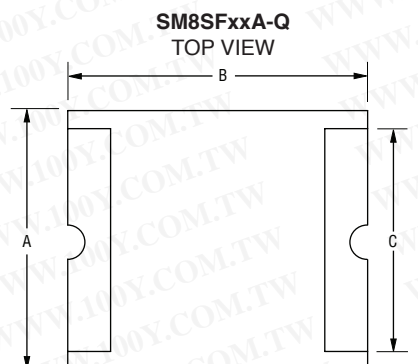


Dimension	Value
A	$8.1 \pm 0.15$ ( $0.319 \pm 0.006$ )
B	$10.5 \pm 0.20$ ( $0.413 \pm 0.008$ )
C	$7.0 \pm 0.15$ ( $0.276 \pm 0.006$ )
D	$1.5 \pm 0.15$ ( $0.059 \pm 0.006$ )
E	$1.3 \pm 0.20$ ( $0.051 \pm 0.008$ )
F	$7.5 \pm 0.15$ ( $0.295 \pm 0.006$ )

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

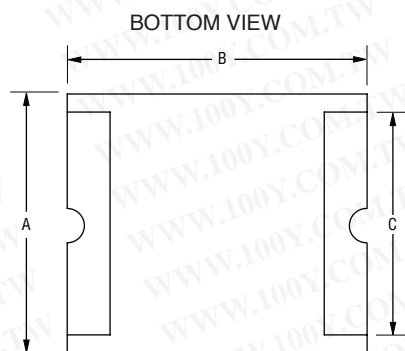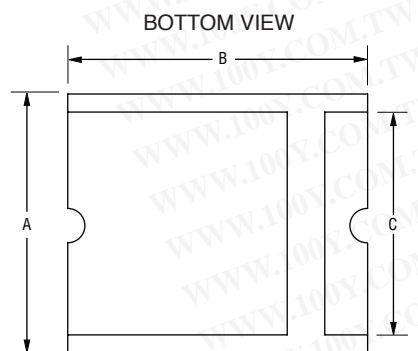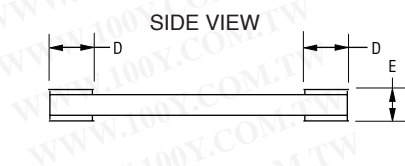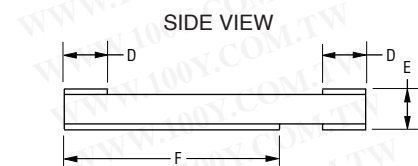

## Recommended Footprint

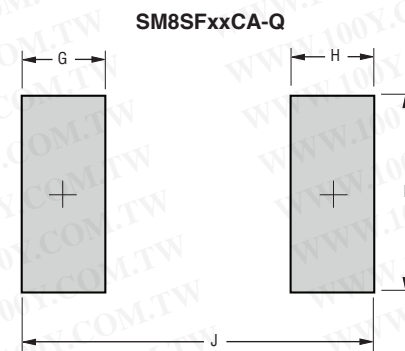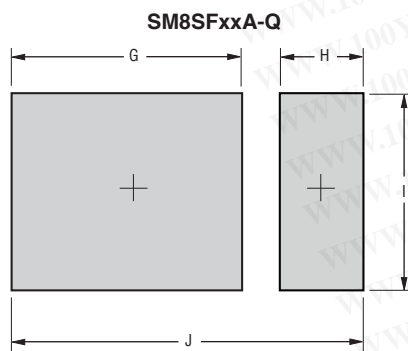

Dim.	SM8SFxxA-Q	SM8SFxxCA-Q
G	9.5	3.5
(Min.)	(0.374)	(0.138)
H	3.5	3.5
(Min.)	(0.138)	(0.138)
I	8.0	8.0
(Min.)	(0.315)	(0.315)
J	14.5	14.5
(Ref.)	(0.571)	(0.571)

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## SM8SF-Q Transient Voltage Suppressor Diode Series

**BOURNS®**

### Physical Specifications

Case ..... Molded plastic per UL Class 94V-0  
Polarity..... Cathode band indicates unidirectional device  
No cathode band indicates bidirectional device

### How to Order


Package ..... **SM8SF 33 CA - Q**  
SM8SF = 0.41 inch x 0.32 inch size  
Working Peak Reverse Voltage .....  
33 = 33 V<sub>RWM</sub> (Volts)  
Suffix .....  
A = 5 % Tolerance Unidirectional Device  
CA = 5 % Tolerance Bidirectional Device  
AEC-Q101 Suffix .....  
Q = AEC-Q101 Compliant

### Environmental Specifications


Moisture Sensitivity Level ..... 1  
ESD Classification (HBM) ..... 3B

### Typical Part Marking

#### SM8SFxxA-Q

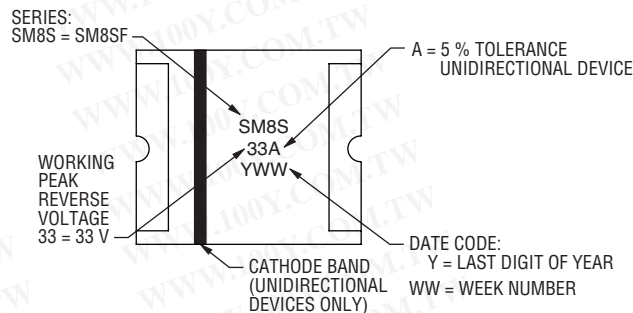

#### SM8SFxxCA-Q

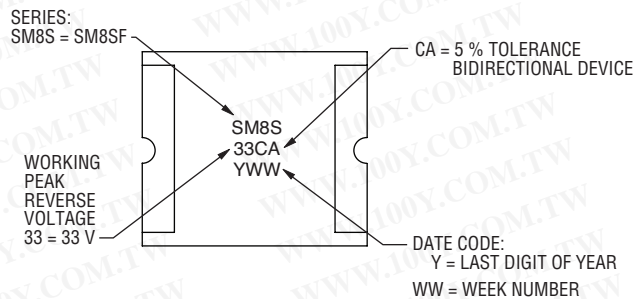

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).





勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## SM8SF-Q Transient Voltage Suppressor Diode Series

**BOURNS®**


### Packaging Information

The product will be dispensed in tape and reel format (see diagram below).

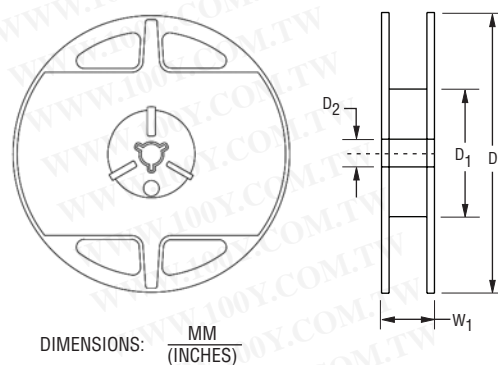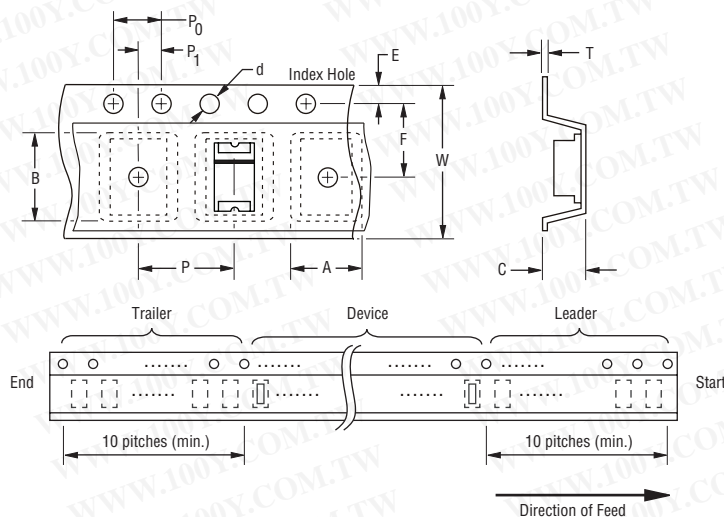

Devices are packed in accordance with EIA 481 standard specifications shown here.

Item	Symbol	SM8SF Series
Carrier Width	A	$8.35 \pm 0.10$ (0.329 ± 0.004)
Carrier Length	B	$10.75 \pm 0.10$ (0.423 ± 0.004)
Carrier Depth	C	$1.65 \pm 0.10$ (0.065 ± 0.004)
Sprocket Hole	d	$1.55 \pm 0.05$ (0.061 ± 0.002)
Reel Outside Diameter	D	$178 \pm 1.0$ (7.008 ± 0.039)
Reel Inner Diameter	D <sub>1</sub>	$60 \pm 1.0$ (2.362 ± 0.039)
Feed Hole Diameter	D <sub>2</sub>	$13.5 \pm 0.50$ (0.531 ± 0.02)
Sprocket Hole Position	E	$1.75 \pm 0.10$ (0.069 ± 0.004)
Punch Hole Position	F	$5.50 \pm 0.10$ (0.217 ± 0.004)
Punch Hole Pitch	P	$12.00 \pm 0.10$ (0.472 ± 0.004)
Sprocket Hole Pitch	P <sub>0</sub>	$4.00 \pm 0.10$ (0.157 ± 0.004)
Embossment Center	P <sub>1</sub>	$2.00 \pm 0.10$ (0.079 ± 0.004)
Overall Tape Thickness	T	$0.40$ (0.016) MAX.
Tape Width	W	$16.00 \pm 0.30$ (0.630 ± 0.012)
Reel Width	W <sub>1</sub>	$18.1 \pm 1.2$ (0.713 ± 0.047)
Quantity per Reel	--	750

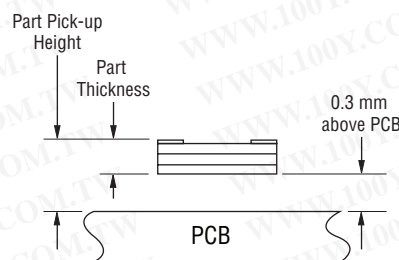

Recommended pick-up height: The bottom of the device should be 0.3 mm above the PCB.