

IGBT MODULE (N series)

■ Features


- Square RBSOA
- Low Saturation Voltage
- Less Total Power Dissipation
- Improved FWD Characteristic
- Minimized Internal Stray Inductance
- Overcurrent Limiting Function (~3 Times Rated Current)

■ Applications

- High Power Switching
- A.C. Motor Controls
- D.C. Motor Controls
- Uninterruptible Power Supply

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Outline Drawing

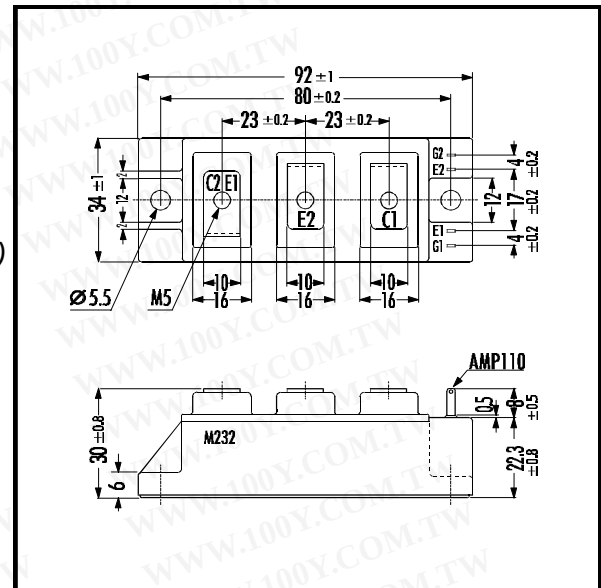


■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings (T_c=25°C)

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V _{CES}	600	V
Gate -Emitter Voltage	V _{GES}	± 20	V
Collector Current	I _C	50	A
	I _C PULSE	100	
	-I _C	50	
	-I _C PULSE	100	
Max. Power Dissipation	P _C	250	W
Operating Temperature	T _i	+150	°C
Storage Temperature	T _{stg}	-40 ~ +125	°C
Isolation Voltage	V _{is}	2500	V
Screw Torque	Mounting *1	3.5	Nm
	Terminals *2	3.5	

Note: *1:Recommendable Value; 2.5 ~ 3.5 Nm (M5)

■ Equivalent Circuit

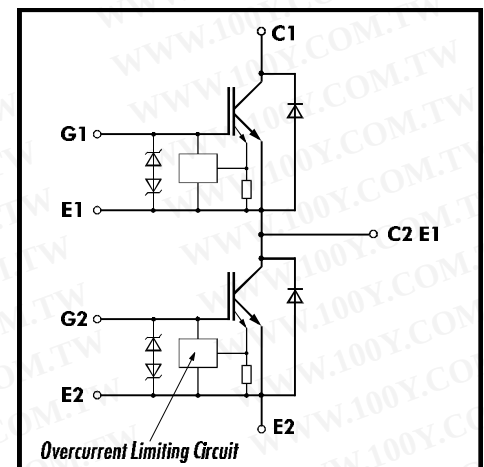

• Electrical Characteristics (at T_j=25°C)


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I _{CE0}	V _{GE} =0V V _{CE} =600V			1.0	mA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V V _{GE} =± 20V			15	μA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{GE} =20V I _C =50mA	4.5		7.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V I _C =50A			2.8	V
Input capacitance	C _{ies}	V _{GE} =0V		3300		pF
Output capacitance	C _{oes}	V _{CE} =10V		730		
Reverse Transfer capacitance	C _{res}	f=1MHz		330		
Turn-on Time	t _{ON}	V _{CC} =300V I _C =50A		0.6	1.2	μs
Turn-off Time	t _r	V _{GE} =± 15V		0.2	0.6	
	t _f	R _G =51Ω		0.2	0.35	
Diode Forward On-Voltage	V _F	I _F =50A V _{GE} =0V			3.0	V
Reverse Recovery Time	t _{rr}	I _F =50A			300	ns

• Thermal Characteristics

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	R _{th(j-c)}	IGBT			0.50	°C/W
	R _{th(j-e)}	Diode			1.33	
	R _{th(c-f)}	With Thermal Compound		0.05		


Collector current vs. Collector-Emittor voltage

$T_J = 25^\circ\text{C}$

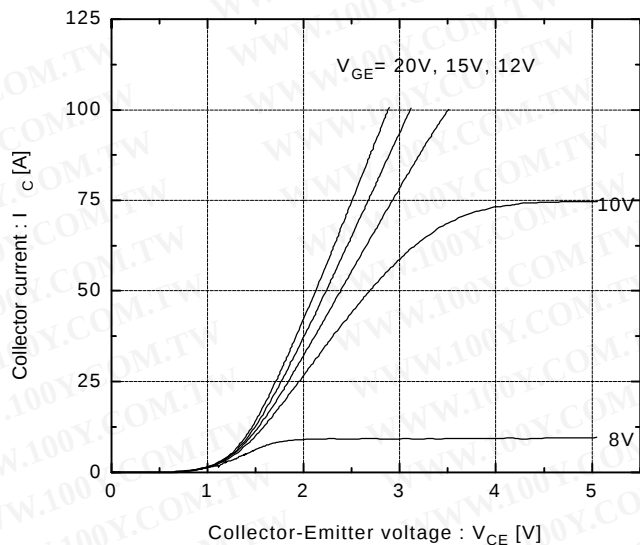


Collector current vs. Collector-Emittor voltage

$T_J = 125^\circ\text{C}$

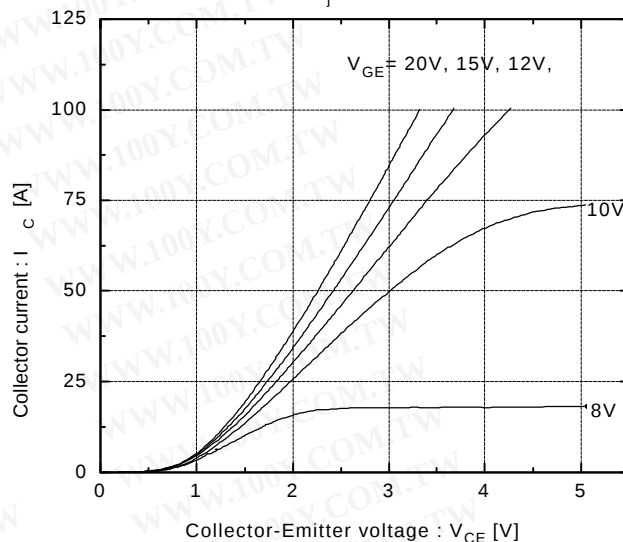


Collector-Emittor vs. Gate-Emittor voltage

$T_J = 25^\circ\text{C}$

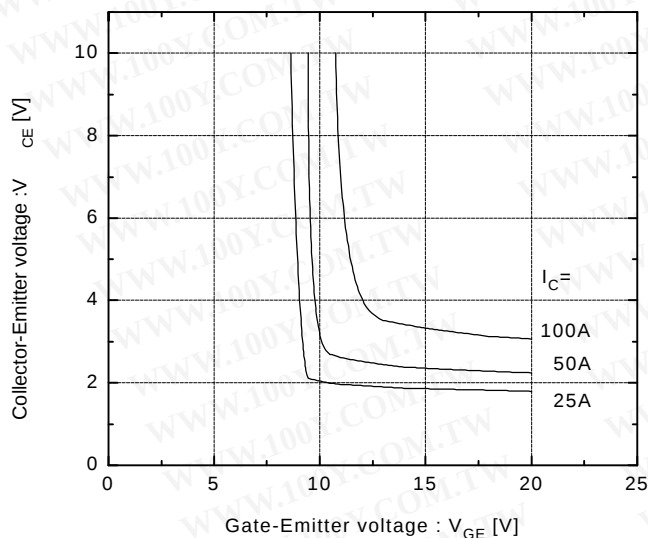


Collector-Emittor vs. Gate-Emittor voltage


$T_J = 125^\circ\text{C}$

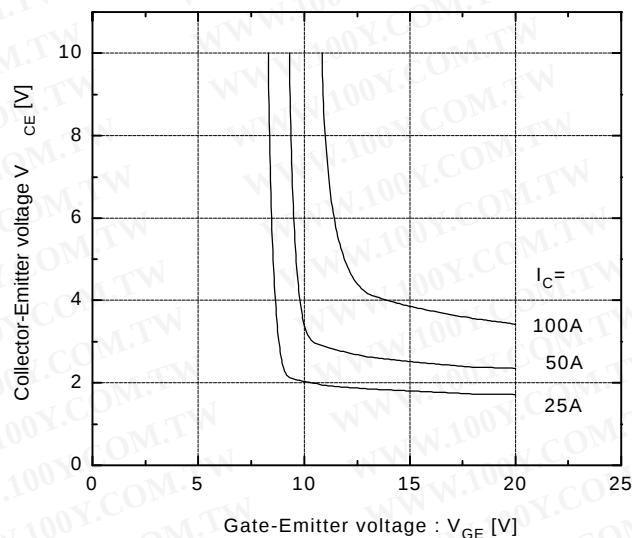

Switching time vs. Collector current
 $V_{CC}=300\text{V}$, $R_G=51\Omega$, $V_{GE}=\pm 15\text{V}$, $T_J=25^\circ\text{C}$

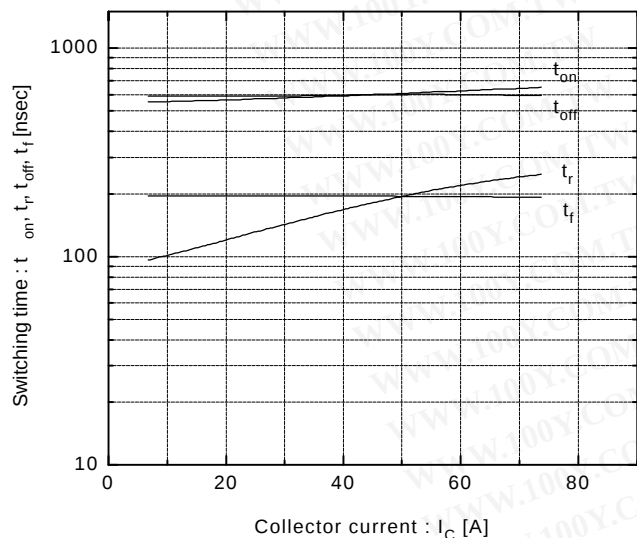


Switching time vs. Collector current
 $V_{CC}=300\text{V}$, $R_G=51\Omega$, $V_{GE}=\pm 15\text{V}$, $T_J=125^\circ\text{C}$

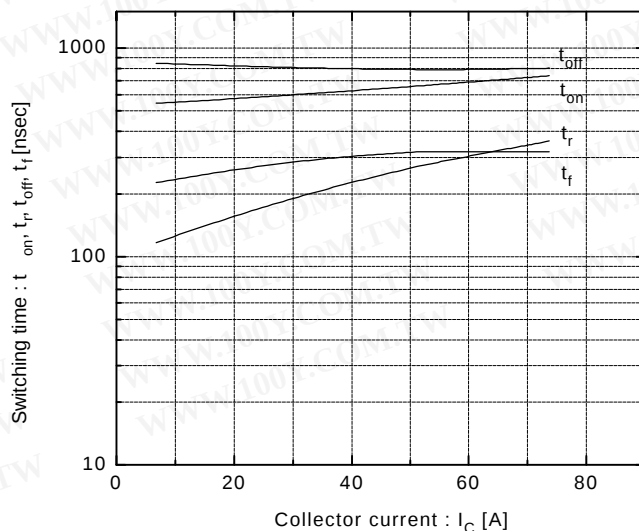


Switching time vs. R_G

$V_{CC}=300V$, $I_C=50A$, $V_{GE}=\pm 15V$, $T_J=25^\circ C$

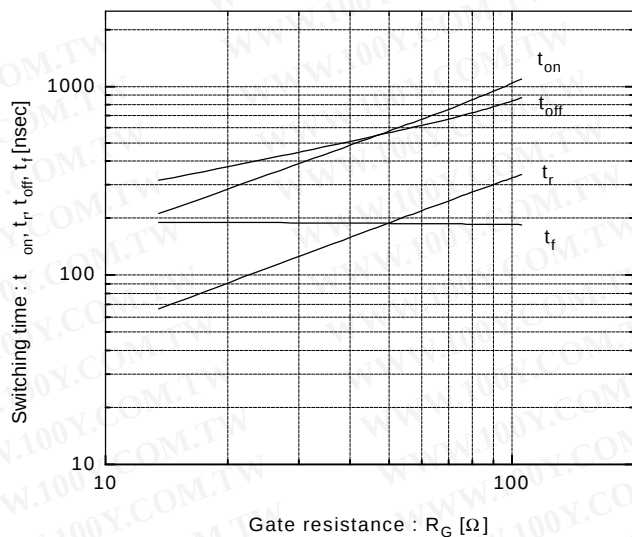


Dynamic input characteristics

$T_J=25^\circ C$

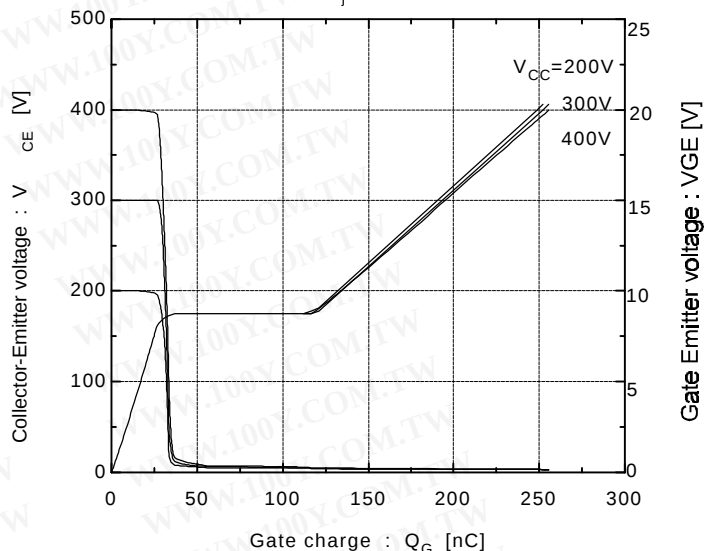


Forward current vs. Forward voltage

$V_{GE}=0V$

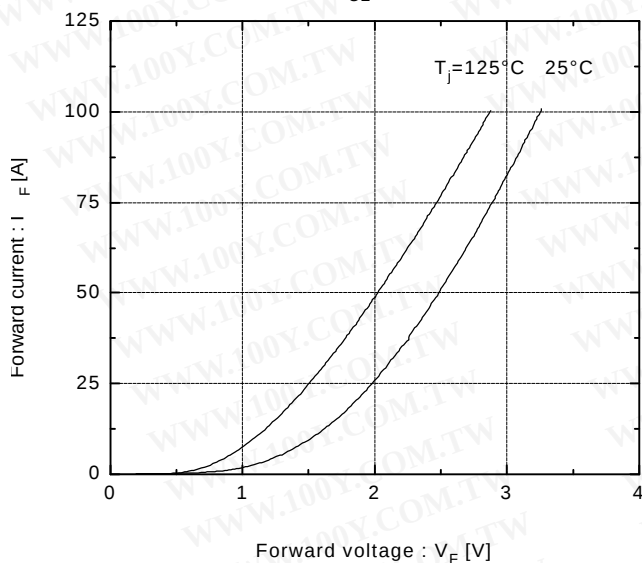


Reverse recovery characteristics

t_{rr} , I_{rr} vs. I_F

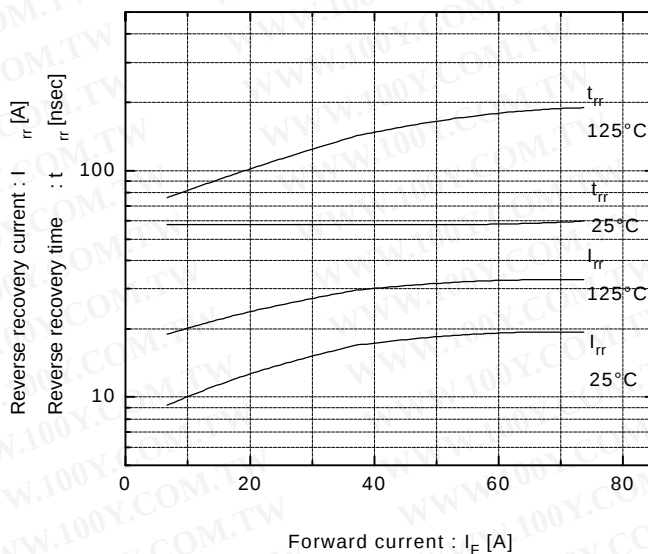


Transient thermal resistance

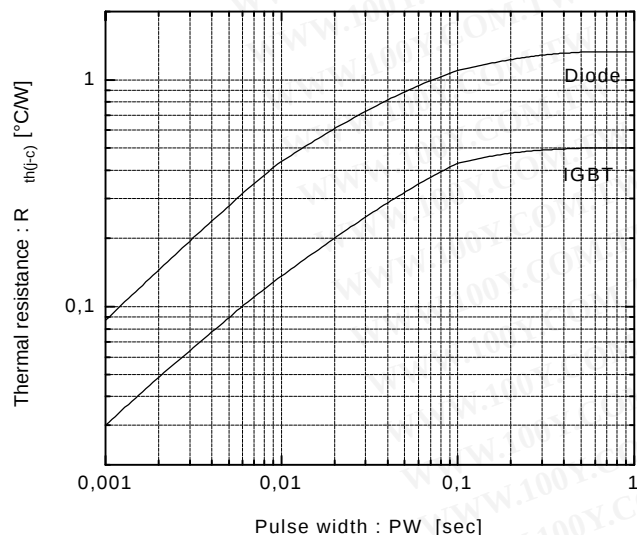

Reversed biased safe operating area

$+V_{GE}=15V$, $-V_{GE}\leq 15V$, $T_J\leq 125^\circ C$, $R_G\geq 51\Omega$


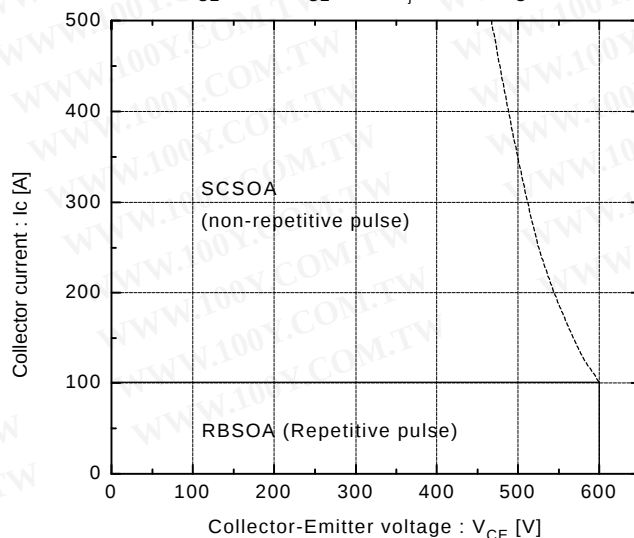


Switching loss vs. Collector current

$V_{CC}=300V$, $R_G=51\Omega$, $V_{GE}=\pm 15V$

Capacitance vs. Collector-Emitter voltage

$T_J=25^\circ C$

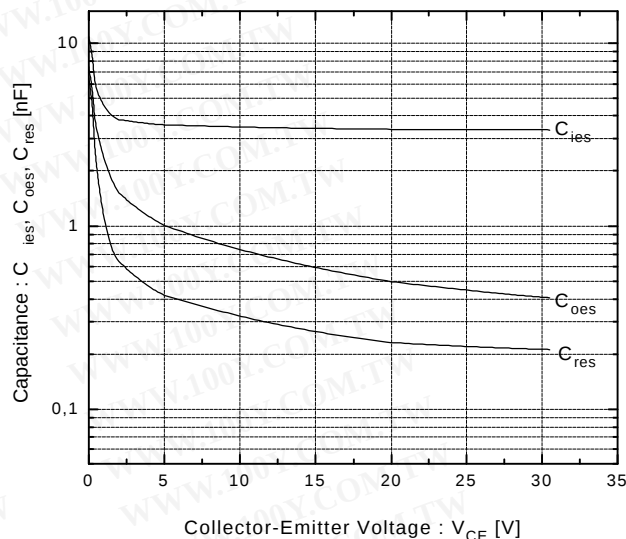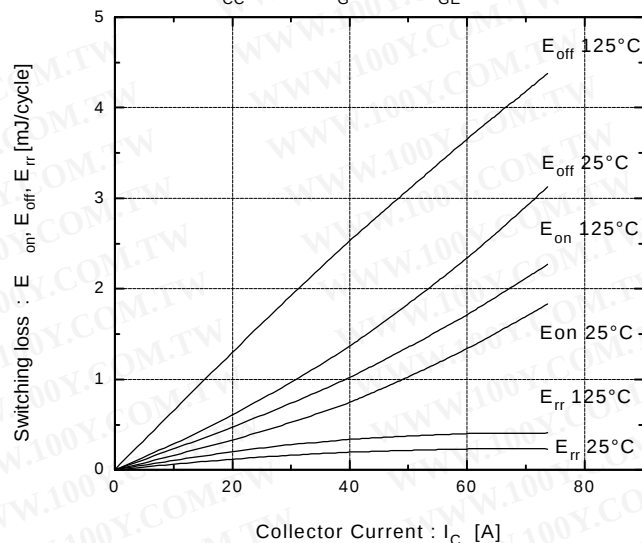

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)