

SBR 25A/35A SERIES

SILICON / GLASS PASSIVATED THREE PHASE BRIDGE RECTIFIERS



**CHENG-YI
ELECTRONIC**

FEATURES



- Diffused Junction
- Low Forward Voltage Drop
- High Current Capability
- High Reliability
- High Surge Current Capability
- Ideal for Printed Circuit Boards



MECHANICAL DATA

- Cass: Epoxy Cass With Heat Sink Internally Mounted in Bridge Encapsulation
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: As Marked on Body
- Weight: 20 grams (approx.)
- Mounting Position:
Bolt Down on Heatsink With Siloicone Thermal Compound Between Bridge and Mounting Surface for Maximum Heat Transfer Efficiency
- Mounting Torque: 20 in lbs. Max.
- Marking: Type Number

REVERSE VOLTAGE -50 to 1600 Volts
FORWARD CURRENT -25/35 Amperes

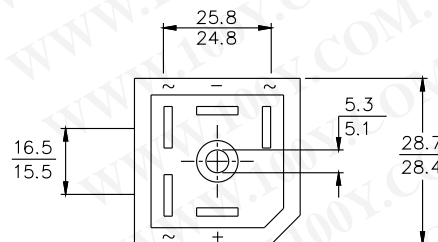

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

VOLTAGE RATINGS												
Characteristics	Symbol	-00	-01	-02	-04	-06	-08	-10	-12	-14	-16	UNIT
Peak Repetitive Reverse Voltage	V_{RRM}											
Working Peak Reverse Voltage	V_{RWM}	50	100	200	400	600	800	1000	1200	1400	1600	V
DC Blocking Voltage	V_R											
Peak Non-Repetitive Reverse Voltage	V_{RSM}	75	150	275	500	725	900	1100	1300	1500	1700	V
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	140	280	420	560	700	840	980	1120	V
FORWARD CONDUCTION												
Characteristics	Symbol	MT25					MT35					UNIT
Maximum Average Forward Rectified Current @ $T_c=100^\circ\text{C}$	I_o	25					35					A
Non-Repetitive Peak Forward Surge Current (No Voltage Reapplied $t = 8.3\text{ms}$ at 60Hz) (No Voltage Reapplied $t = 10\text{ms}$ at 50Hz) (100% V_{RRM} Reapplied $t = 8.3\text{ms}$ at 60Hz) (100% V_{RRM} Reapplied $t = 10\text{ms}$ at 50Hz)	I_{FSM}	375 360 314 300					500 475 420 400					A
$I^2 t$ Rating for Fusing (No Voltage Reapplied $t = 8.3\text{ms}$ at 60Hz) (No Voltage Reapplied $t = 10\text{ms}$ at 50Hz) (100% V_{RRM} Reapplied $t = 8.3\text{ms}$ at 60Hz) (100% V_{RRM} Reapplied $t = 10\text{ms}$ at 50Hz)	$I^2 t$	580 635 410 450					1030 1130 730 800					A ² S
Forward Voltage (per element) @ $T_J = 25^\circ\text{C}$, @ $I_{FM} = 40\text{APk}$ Per single junction	V_F	1.26					1.19					V
Peak Reverse Current (per leg) @ $T_J = 25^\circ\text{C}$ At Rated DC Blocking Voltage @ $T_J = 125^\circ\text{C}$	I_R						10 5.0					μA mA
RMS Isolation Voltage from Case to Lead	V_{ISO}						2500					V
THERMAL CHARACTERISTICS												
Operating Temperature Range	T_J						-40 to +150					$^\circ\text{C}$
Storage Temperature Range	T_{STG}						-40 to +150					$^\circ\text{C}$
Temperature Resistance Junction to Case at DC Operation per Bridge	$R\theta_{JC}$	1.42					1.16					K/W
Temperature Resistance Case to Heatsink Mounting Surface, Smooth, Flat and Greased	$R\theta_{CS}$						0.2					K/W

SBR 25A/35A SERIES

SILICON / GLASS
PASSIVATED THREE PHASE
BRIDGE RECTIFIERS



CHENG-YI
ELECTRONIC

RATING AND CHARACTERISTICS CURVES SBR 25A/35A SERIES

FIG. 1- Current Rating Characteristics

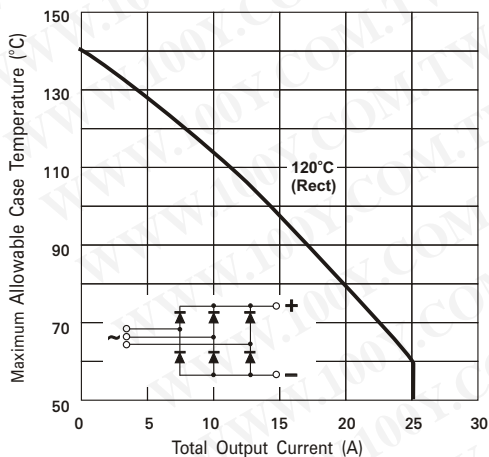


FIG. 2- Forward Voltage Drop Characteristics

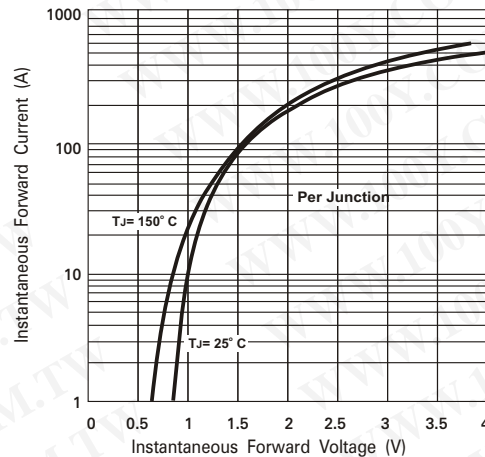


FIG. 3- Total Power Loss Characteristics

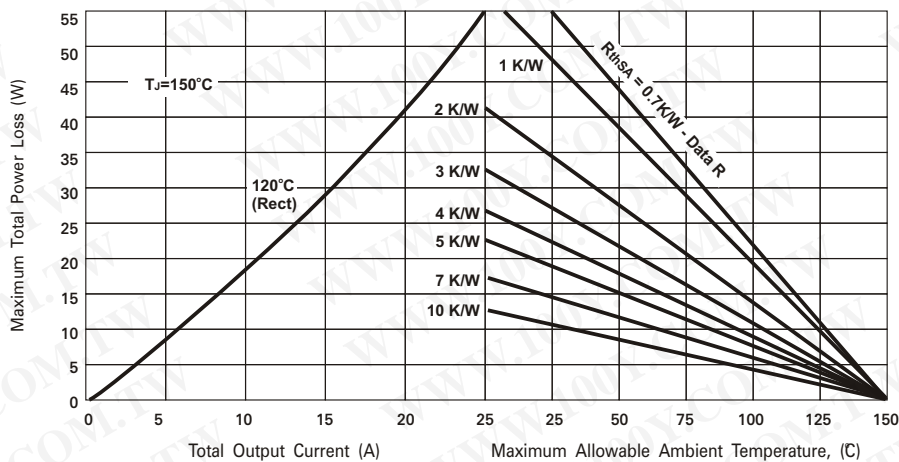


FIG. 4- Maximum Non-Repetitive Surge Current

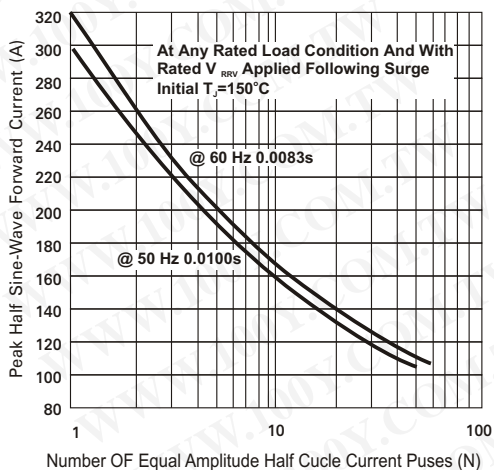


FIG. 5- Maximum Non-Repetitive Surge Current

