



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMST3906

Features

- Epitaxial Planar Die Construction
- Complementary NPN Type available (MMST3904)
- Ultra-small surface mount package
- Marking : K5N
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

PNP Small Signal Transistors

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	40	V
V_{CBO}	Collector-Base Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current-Continuous ⁽¹⁾	200	mA
P_C	Power dissipation ⁽¹⁾	200	mW
T_J	Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------


OFF CHARACTERISTICS⁽²⁾

$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1.0mA$, $I_B=0$)	40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10\mu A$, $I_E=0$)	40	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_C=10\mu A$, $I_C=0$)	5.0	---	Vdc
I_{CEX}	Collector-Base Cutoff Current ($V_{CE}=30Vdc$, $V_{EB(OFF)}=3.0Vdc$)	---	50	nAdc
I_{BL}	Emitter-Base Cutoff Current ($V_{CE}=30Vdc$, $V_{EB(OFF)}=3.0Vdc$)	---	50	nAdc

ON CHARACTERISTICS⁽²⁾


h_{FE}	DC Current Gain ($I_C=100\mu A$, $V_{CE}=1.0Vdc$) ($I_C=1.0mA$, $V_{CE}=1.0Vdc$) ($I_C=10mA$, $V_{CE}=1.0Vdc$) ($I_C=50mA$, $V_{CE}=1.0Vdc$) ($I_C=500mA$, $V_{CE}=1.0Vdc$)	60 80 100 60 30	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)	---	0.20 0.30	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)	0.65 ---	0.85 0.95	Vdc

Note: 1. Valid provided that terminals are kept at ambient temperature.
 2. Pulse test: Pulse width<300us, duty cycle<2%

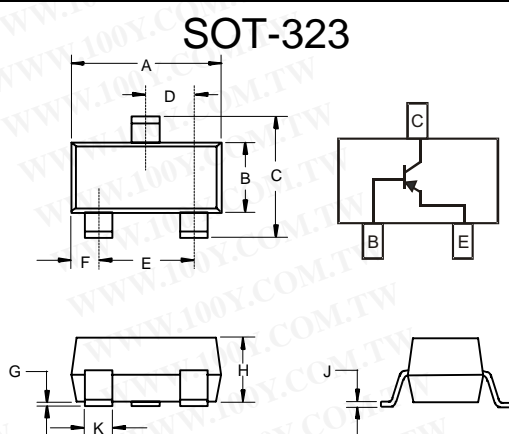

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout



MMST3906

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



SMALL SIGNAL CHARACTERISTICS

C_{obo}	Output Capacitance ($V_{CB}=5.0Vdc, f=1.0MHz, I_E=0$)	---	4.5	pF
C_{ibo}	Input Capacitance ($V_{EB}=0.5Vdc, f=1.0MHz, I_C=0$)	---	10	pF
h_{ie}	Input Impedance	2.0	12	kohms
h_{re}	Voltage Feedback Ratio	0.1	10	$\times 10^{-4}$
h_{fe}	Small Signal Current Gain	100	400	---
h_{oe}	Output Admittance	3.0	60	μS
f_T	Current Gain-Bandwidth Product ($V_{CE}=20Vdc, I_C=10mAdc, f=100MHz$)	300	---	MHz
NF	Noise Figure ($V_{CE}=5.0Vdc, I_C=100\mu Adc, R_S=1.0KOHMS, f=1.0KHz$)	---	4.0	dB

SWITCHING CHARACTERISTICS

t_d	Delay Time	$V_{CC}=3.0Vdc, I_C=10mAdc,$ $V_{BE(off)}=0.5Vdc, I_B=1.0mAdc$	---	35	ns
t_r	Rise Time	$V_{CC}=3.0Vdc, I_C=10mAdc,$ $V_{BE(off)}=0.5Vdc, I_B=1.0mAdc$	---	35	ns
t_s	Storage Time	$V_{CC}=3.0Vdc, I_C=10mAdc,$ $I_{B1}=I_{B2}=1.0mAdc$	---	225	ns
t_f	Fall Time	$V_{CC}=3.0Vdc, I_C=10mAdc,$ $I_{B1}=I_{B2}=1.0mAdc$	---	75	ns



Micro Commercial Components

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Ordering Information

Device (Part Number)-TP	Packing Tape&Reel;3Kpcs/Reel
----------------------------	---------------------------------

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.