



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

TIP122

NPN Silicon Transistors

Features

- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Darlington configuration in Jedec TO-220 package
- The complementary PNP types are the TIP127 respectively.
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	100	V
V_{CBO}	Collector-Base Voltage	100	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_{CP}	Peak Collector Current	8.0	A
I_C	Collector Current	5.0	A
P_C	Collector power dissipation	65	W
T_J	Junction Temperature	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}C$

Electrical Characteristics @ 25 $^{\circ}C$ Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
OFF CHARACTERISTICS				
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=30mA_{dc}$, $I_B=0$)	100	---	Vdc
I_{CBO}	Collector-Base Cutoff Current ($V_{CB}=100V_{dc}$, $I_E=0$)	---	0.2	mA _{dc}
I_{EBO}	Emitter-Base Cutoff Current ($V_{EB}=5.0V_{dc}$, $I_C=0$)	---	2.0	mA _{dc}
I_{CEO}	Collector-Emitter Cutoff Current ($V_{CE}=50V_{dc}$, $I_B=0$)	---	0.5	mA _{dc}

ON CHARACTERISTICS

h_{FE-1}	Forward Current Transfer Ratio ($I_C=0.5A_{dc}$, $V_{CE}=3.0V_{dc}$)	1000	---	
h_{FE-2}	Forward Current Transfer Ratio ($I_C=3.0A_{dc}$, $V_{CE}=3.0V_{dc}$)	1000	---	
$V_{CE(sat)-1}$	Collector-Emitter Saturation Voltage ($I_C=3.0A_{dc}$, $I_B=12mA_{dc}$)	---	2.0	Vdc
$V_{CE(sat)-2}$	Collector-Emitter Saturation Voltage ($I_C=5.0A_{dc}$, $I_B=20mA_{dc}$)	---	4.0	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=3.0A_{dc}$, $V_{CE}=3.0A_{dc}$)	---	2.5	Vdc

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

TO-220

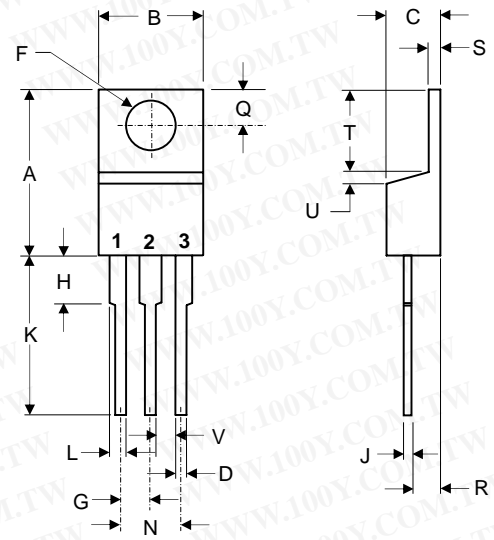

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	∅
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	----	.050	----	1.27	
V	.045	----	1.15	----	



Micro Commercial Components

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering Information

Device	Packing
(Part Number)-BP	Bulk;1Kpcs/Box

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com