



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

## TIP125/126/127

### Features

- The complementary NPN types are the TIP121/2/3 respectively
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking : part number


### Absolute Maximum Ratings @ T<sub>a</sub> = 25°C (unless otherwise noted)

Symbol	Parameter	Value	Unit
V <sub>CB0</sub> TIP125 TIP126 TIP127	Collector-base voltage (Open emitter)	-60 -80 -100	V
V <sub>CE0</sub> TIP125 TIP126 TIP127	Collector-emitter voltage (Open base)	-60 -80 -100	V
V <sub>EB0</sub>	Emitter-base Voltage(Open collector)	-5	V
I <sub>C</sub>	Collector Current	-5	A
I <sub>CM</sub>	Collector Current Pulse	-8	A
I <sub>B</sub>	Base Current	-0.12	A
P <sub>C</sub>	Total Device Dissipation(Ta=25°C)	2	W
	Total Device Dissipation(Tc=25°C)	40	W
T <sub>J</sub>	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	°C

## Silicon PNP Darlington Power Transistors

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
V <sub>CE(SUS)</sub> TIP125 TIP126 TIP127	Collector-emitter sustaining voltage (I <sub>C</sub> =-100mA; I <sub>B</sub> =0)	-60 -80 -100		V
V <sub>CE(sat)</sub>	Collector-emitter Saturation Voltage (I <sub>C</sub> =-3A I <sub>B</sub> =-0.012A) (I <sub>C</sub> =-5A I <sub>B</sub> =-0.02A)		-2.0 -4.0	V
V <sub>BE</sub>	Base-emitter Voltage (I <sub>C</sub> =-3A; V <sub>CE</sub> =-3V)		-2.5	V
I <sub>CB0</sub> TIP125 TIP126 TIP127	Collector cut-off current (V <sub>CB</sub> =-60V; I <sub>E</sub> =0) (V <sub>CB</sub> =-80V; I <sub>E</sub> =0) (V <sub>CB</sub> =-100V; I <sub>E</sub> =0)	-0.2		mA
I <sub>CE0</sub> TIP125 TIP126 TIP127	Collector cut-off current (V <sub>CE</sub> =-30V; V <sub>EB</sub> =0) (V <sub>CE</sub> =-40V; V <sub>EB</sub> =0) (V <sub>CE</sub> =-50V; V <sub>EB</sub> =0)	-0.5		mA
I <sub>EB0</sub>	Emitter cut-off current (V <sub>EB</sub> =-5V; I <sub>C</sub> =0)		-2.0	mA
H <sub>fe</sub>	DC current gain (I <sub>C</sub> =-0.5A; V <sub>CE</sub> =-3V) (I <sub>C</sub> =-3.0A; V <sub>CE</sub> =-3V)	1000 1000		
C <sub>OB</sub>	Output capacitance (I <sub>E</sub> =0; V <sub>CB</sub> =-10V, f=0.1MHz)		300	PF

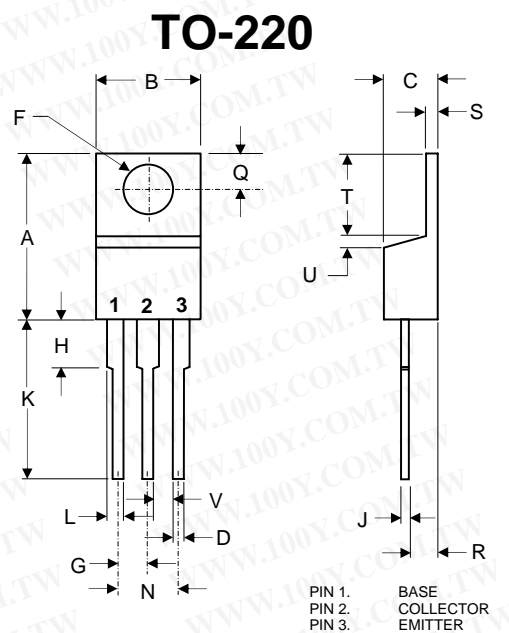

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.560	.625	14.22	15.88	
B	.380	.420	9.65	10.67	
C	.140	.190	3.56	4.82	
D	.020	.045	0.51	1.14	
F	.139	.161	3.53	4.09	∅
G	.190	.110	2.29	2.79	
H	---	.250	---	6.35	
J	.012	.025	0.30	0.64	
K	.500	.580	12.70	14.73	
L	.045	.060	1.14	1.52	
N	.190	.210	4.83	5.33	
Q	.100	.135	2.54	3.43	
R	.080	.115	2.04	2.92	
S	.045	.055	1.14	1.39	
T	.230	.270	5.84	6.86	
U	----	.050	----	1.27	
V	.045	----	1.15	----	

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.



Micro Commercial Components

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Ordering Information

Device (Part Number)-BP	Packing Bulk;1Kpcs/Box
----------------------------	---------------------------

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

[www.mccsemi.com](http://www.mccsemi.com)