

## SWITCHMODE SERIES NPN POWER TRANSISTORS

... designed for use in high-voltage, high-speed, power switching applications such as switching regulator's, inverters, and converter.

### FEATURES:

\*Collector-Emitter Sustaining Voltage-

$$V_{CE(sus)} = 800 \text{ V (Min)}$$

\* Collector-Emitter Saturation Voltage -

$$V_{CE(sat)} = 2.0 \text{ V (Max.) @ } I_C = 3.0 \text{ A, } I_B = 0.6 \text{ A}$$


\* Switching Time -  $t_r = 0.7 \text{ us (Max.) @ } I_C = 4.0 \text{ A}$

**NPN**  
**2SC3153**


**6 AMPERE**  
**SILICON POWER**  
**TRANSISTORS**  
**800 VOLTS**  
**100 WATTS**

### MAXIMUM RATINGS

Characteristic	Symbol	2SC3153	Unit
Collector-Emitter Voltage	$V_{CEO}$	800	V
Collector-Base Voltage	$V_{CBO}$	900	V
Emitter-Base Voltage	$V_{EBO}$	7.0	V
Collector Current - Continuous - Peak	$I_C$ $I_{CM}$	6.0 20	A
Base current	$I_B$	3.0	A
Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	100 0.8	W W/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$



**TO-247(3P)**




PIN 1.BASE  
2.COLLECTOR  
3.EMITTER

DIM	MILLIMETERS	
	MIN	MAX
A	20.63	22.38
B	15.38	16.20
C	1.90	2.70
D	5.10	6.10
E	14.81	15.22
F	11.72	12.84
G	4.20	4.50
H	1.82	2.46
I	2.92	3.23
J	0.89	1.53
K	5.26	5.66
L	18.50	21.50
M	4.68	5.36
N	2.40	2.80
O	3.25	3.65
P	0.55	0.70

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction to Case	$R_{\theta jc}$	1.25	$^\circ\text{C/W}$

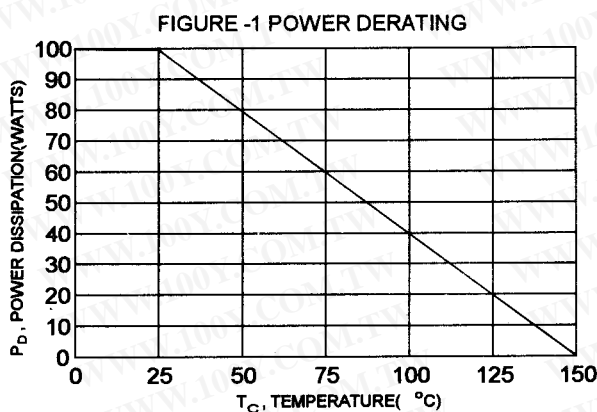

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL CHARACTERISTICS (  $T_c = 25^\circ\text{C}$  unless otherwise noted )

Characteristic	Symbol	Min	Max	Unit
----------------	--------	-----	-----	------

## OFF CHARACTERISTICS

Collector-Emitter Sustaining Voltage ( $I_C = 6.0\text{ A}$ , $I_B = 2.0\text{ A}$ , $L = 200\text{ }\mu\text{H}$ )	$V_{CEO(SUS)}$	800		V
Collector-Emitter Breakdown Voltage ( $I_C = 5.0\text{ mA}$ , $I_B = 0$ )	$V_{(BR)CEO}$	800		V
Collector-Base Breakdown Voltage ( $I_C = 1.0\text{ mA}$ , $I_E = 0$ )	$V_{(BR)CBO}$	900		V
Emitter-Base Breakdown Voltage ( $I_C = 1.0\text{ mA}$ , $I_C = 0$ )	$V_{(BR)EBO}$	7.0		V
Collector Cutoff Current ( $V_{CB} = 800\text{ V}$ , $I_E = 0$ )	$I_{CBO}$		10	$\mu\text{A}$
Emitter Cutoff Current ( $V_{EB} = 5.0\text{ V}$ , $I_C = 0$ )	$I_{EBO}$		10	$\mu\text{A}$

## ON CHARACTERISTICS (1)

DC Current Gain ( $I_C = 0.4\text{ A}$ , $V_{CE} = 5.0\text{ V}$ ) * ( $I_C = 2.0\text{ A}$ , $V_{CE} = 5.0\text{ V}$ )	$h_{FE(2)}$ $h_{FE}$	10 8.0	40	
Collector-Emitter Saturation Voltage ( $I_C = 3.0\text{ A}$ , $I_B = 600\text{ mA}$ )	$V_{CE(sat)}$		2.0	V
Base-Emitter Saturation Voltage ( $I_C = 3.0\text{ A}$ , $I_B = 600\text{ mA}$ )	$V_{BE(sat)}$		1.5	V

## DYNAMIC CHARACTERISTICS

Current-Gain-Bandwidth Product ( $I_C = 0.4\text{ A}$ , $V_{CE} = 10\text{ V}$ , $f = 1.0\text{ MHz}$ )	$f_T$	7.0		MHz
--	-------	-----	--	-----

## SWITCHING CHARACTERISTICS


On Time	$V_{CC} = 400\text{ V}$ , $I_C = 4.0\text{ A}$ $I_{B1} = 0.8\text{ A}$ , $I_{B2} = -1.6\text{ A}$ $R_L = 100\text{ }\Omega$	$t_{on}$	1.0	$\mu\text{s}$
Storage Time		$t_s$	3.0	$\mu\text{s}$
Fall Time		$t_f$	0.7	$\mu\text{s}$

(1) Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ \*  $h_{FE(2)}$  Classification:


10	K	20	15	L	30	20	M	40
----	---	----	----	---	----	----	---	----

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


SAFE OPERATING AREA

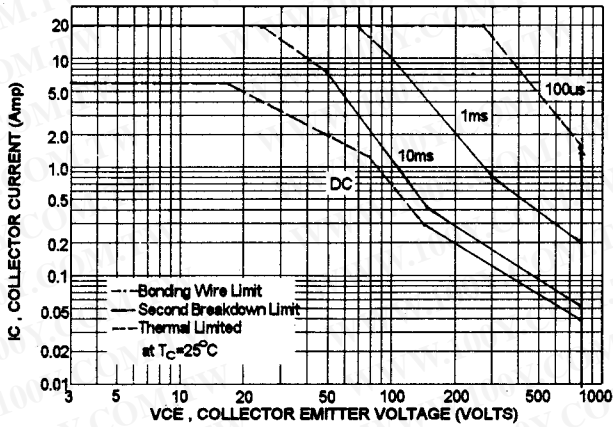


$I_C - V_{BE}$

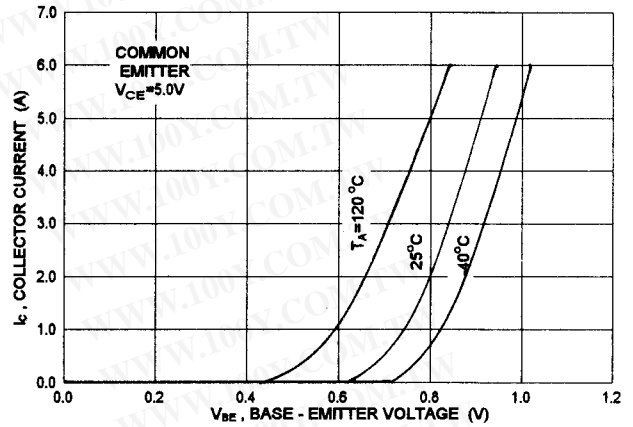


DC CURRENT GAIN

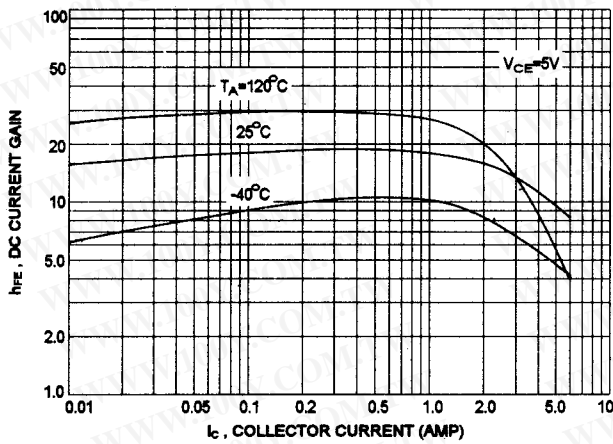


$I_C - V_{CE}$

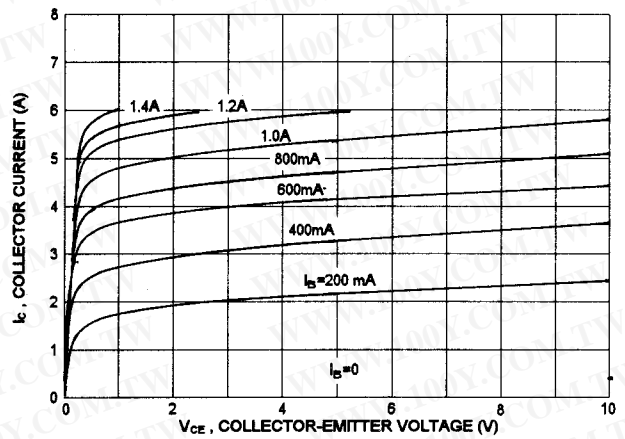

SWITCHING TIME

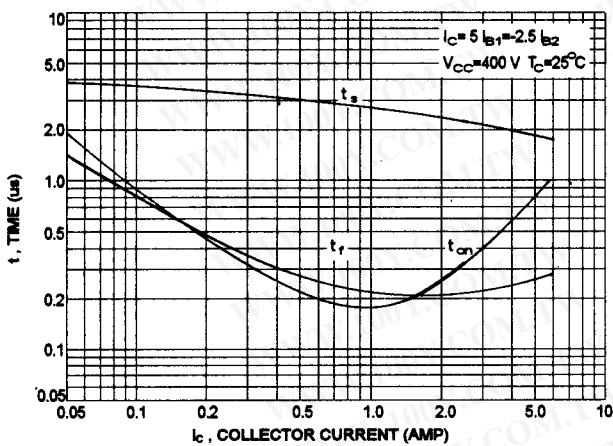

"ON" VOLTAGES

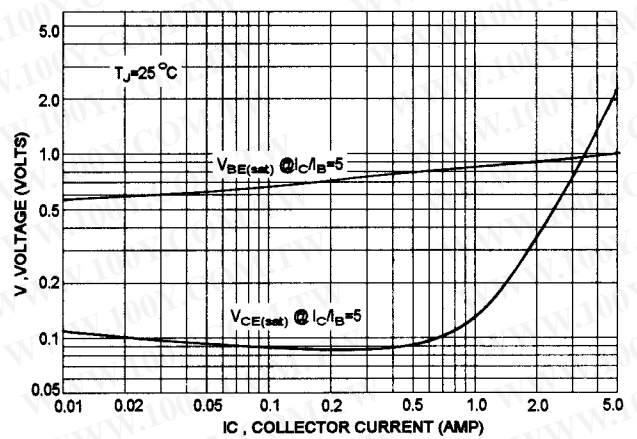

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)