

N-Channel JFETs

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2N4391	PN4391	SST4391
2N4392	PN4392	SST4392
2N4393	PN4393	SST4393

PRODUCT SUMMARY				
Part Number	V _{GS(off)} (V)	r _{DS(on)} Max (Ω)	I _{D(off)} Typ (pA)	t _{ON} Typ (ns)
2N/PN/SST4391	-4 to -10	30	5	4
2N/PN/SST4392	-2 to -5	60	5	4
2N/PN/SST4393	-0.5 to -3	100	5	4

FEATURES

- Low On-Resistance: 4391<30 Ω
- Fast Switching—t_{ON}: 4 ns
- High Off-Isolation: I_{D(off)} with Low Leakage
- Low Capacitance: < 3.5 pF
- Low Insertion Loss

BENEFITS

- Low Error Voltage
- High-Speed Analog Circuit Performance
- Negligible “Off-Error,” Excellent Accuracy
- Good Frequency Response, Low Glitches
- Eliminates Additional Buffering




APPLICATIONS

- Analog Switches
- Choppers
- Sample-and-Hold
- Normally “On” Switches
- Current Limiters
- Commutators

DESCRIPTION

The 2N/PN/SST4391 series features many of the superior characteristics of JFETs which make it a good choice for demanding analog switching applications and for specialized amplifier circuits.

The 2N series hermetically-sealed TO-206AA (TO-18) can is available with processing per MIL-S-19500 (see Military Information). Both the PN, TO-226AA (TO-92), and SST, TO-236 (SOT-23), series are available in tape-and-reel for automated assembly (see Packaging Information). For similar dual products, see the 2N5564/5565/5566 data sheet.

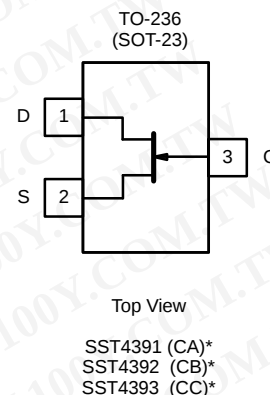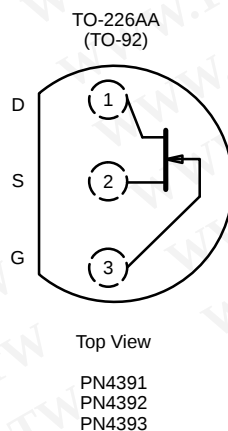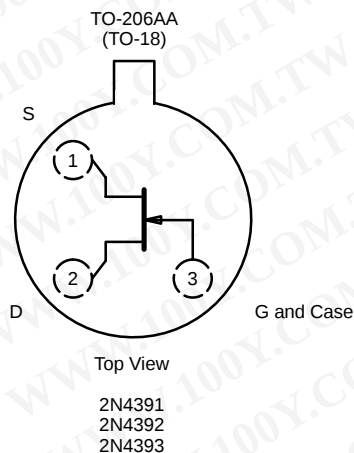

*Marking Code for TO-236

ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage:	(2N/PN Prefixes)	−40 V
	(SST Prefix)	−35 V
Gate Current		50 mA
Lead Temperature		300 °C
Storage Temperature :	(2N Prefix)	−65 to 200 °C
	(PN/SST Prefixes)	−55 to 150 °C

Operating Junction Temperature :	(2N Prefix)	−55 to 200 °C
	(PN/SST Prefixes)	−55 to 150 °C
Power Dissipation :	(2N Prefix) ^a	(T _C = 25°C) 1800 mW
	(PN/SST Prefixes) ^b	350 mW

- Notes
- a. Derate 10 mW/°C above 25°C
- b. Derate 2.8 mW/°C above 25°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)											
Parameter	Symbol	Test Conditions		Typ ^a	Limits						Unit
					4391		4392		4393		
					Min	Max	Min	Max	Min	Max	
Static											
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = −1 μA, V _{DS} = 0 V		−55	−40		−40		−40		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 20 V	2N/PN: I _D = 1 nA		−4	−10	−2	−5	−0.5	−3	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V		2N	50	150	25	75	5	30	mA
				PN	50	150	25	100	5	60	
				SST	50		25		5		
Gate Reverse Current	I _{GSS}	V _{GS} = −20 V V _{DS} = 0 V		2N/SST	−5	−100		−100		−100	pA
				PN	−5	−1000		−1000		−1000	
		2N: T _A = 150°C PN: T _A = 100°C SST: T _A = 125°C		−13		−200		−200		−200	nA
				−1		−200		−200		−200	
				−3							
Gate Operating Current	I _G	V _{DG} = 15 V, I _D = 10 mA		−5							
Drain Cutoff Current	I _{D(off)}	V _{DS} = 20 V	2N: V _{GS} = −5 V	5						100	pA
			2N: V _{GS} = −7 V	5			100				
			2N: V _{GS} = −12 V	5		100					
			PN: V _{GS} = −5 V	0.005					1	nA	
			PN: V _{GS} = −7 V	0.005			1				
			PN: V _{GS} = −12 V	0.005		1					
		SST V _{DS} = 10 V, V _{GS} = −10 V		5		100		100		100	pA
		V _{DS} = 20 V T _A = 150°C	2N: V _{GS} = −5 V	13						200	nA
			2N: V _{GS} = −7 V	13			200				
			2N: V _{GS} = −12 V	13		200					
		V _{DS} = 20 V T _A = 100°C	PN: V _{GS} = −5 V	1					200		
			PN: V _{GS} = −7 V	1			200				
			PN: V _{GS} = −12 V	1		200					
V _{DS} = 10 V T _A = 125°C	SST: V _{GS} = −10 V		3								
Drain-Source On-Voltage	V _{DS(on)}	V _{GS} = 0 V		I _D = 3 mA	0.25					0.4	V
				I _D = 6 mA	0.3			0.4			
				I _D = 12 mA	0.35		0.4				
Drain-Source On-Resistance	r _{DS(on)}	V _{GS} = 0 V, I _D = 1 mA				30		60		100	Ω
Gate-Source Forward Voltage	V _{GS(F)}	I _G = 1 mA V _{DS} = 0 V		2N	0.7		1		1		V
				PN/SST	0.7						

SPECIFICATIONS (T _A = 25 °C UNLESS OTHERWISE NOTED)												
Parameter	Symbol	Test Conditions		Typ ^a	Limits						Unit	
					4391		4392		4393			
					Min	Max	Min	Max	Min	Max		
Dynamic												
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 20 V, I _D = 1 mA, f = 1 kHz		6							mS	
Common-Source Output Conductance	g _{os}			25							μS	
Drain-Source On-Resistance	r _{DS(on)}	V _{GS} = 0 V, I _D = 0 mA , f = 1 kHz				30		60		100	Ω	
Common-Source Input Capacitance	C _{iss}	V _{DS} = 20 V, V _{GS} = 0 V f = 1 MHz		2N	12		14		14		14	pF
				PN	12		16		16		16	
				SST	13							
Common-Source Reverse Transfer Capacitance	C _{rss}	V _{DS} = 0 V f = 1 MHz	2N: V _{GS} = -5 V	3.3							3.5	
			2N: V _{GS} = -7 V	3.2				3.5				
			2N: V _{GS} = -12 V	2.8		3.5						
			PN: V _{GS} = -5 V	3.5							5	
			PN: V _{GS} = -7 V	3.4				5				
			PN: V _{GS} = -12 V	3.0		5						
			SST: V _{GS} = -5 V	3.6								
			SST: V _{GS} = -7 V	3.5								
SST: V _{GS} = -12 V	3.1											
Equivalent Input Noise Voltage	e _n	V _{DS} = 10 V, I _D = 10 mA f = 1 kHz		3							nV/ √Hz	
Switching												
Turn-On Time	t _{d(on)}	V _{DD} = 10 V V _{GS(H)} = 0 V See Switching Circuit	2N/PN	2		15		15		15	ns	
			SST	2								
	t _r		2N/PN	2		5		5		5		
			SST	2								
Turn-Off Time	t _{d(off)}		2N/PN	6		20		35		50		
			SST	6								
	t _f		2N/PN	13		15		20		30		
			SST	13								

- Notes
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
 - Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.


NCB

勝 特 力 材 料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


On-Resistance and Drain Current vs. Gate-Source Cutoff Voltage

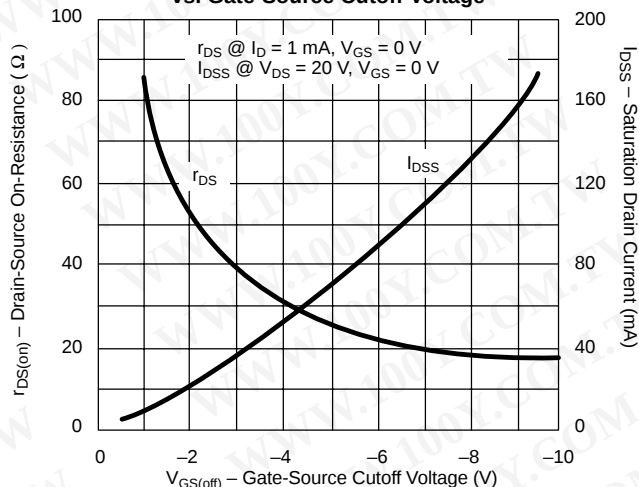


On-Resistance vs. Drain Current

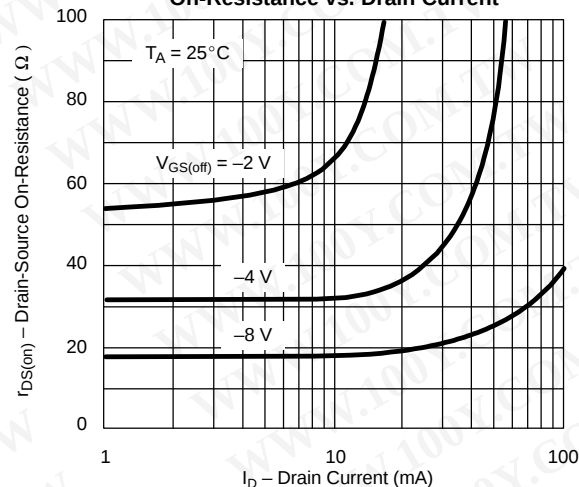


On-Resistance vs. Temperature

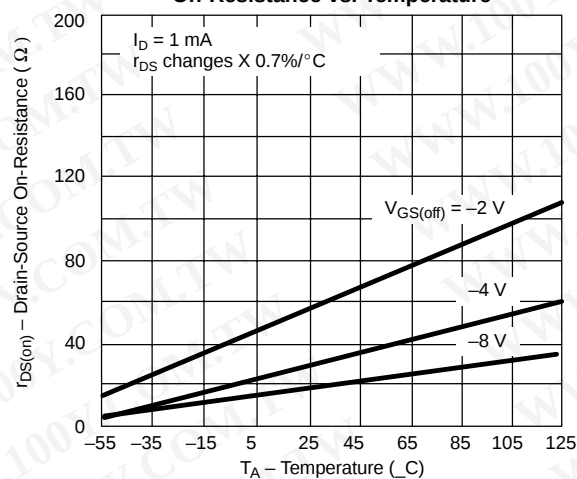


Turn-On Switching

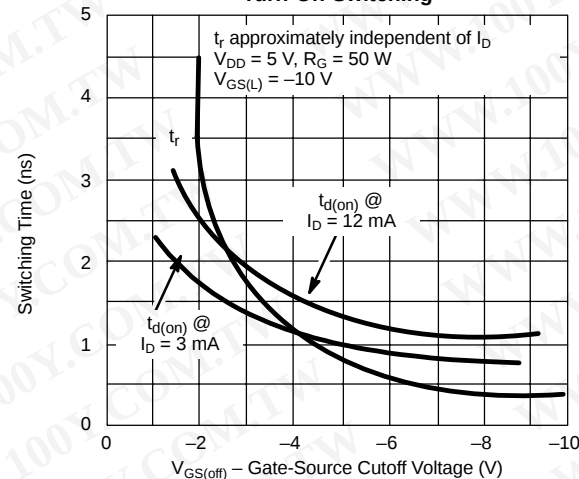

Turn-Off Switching






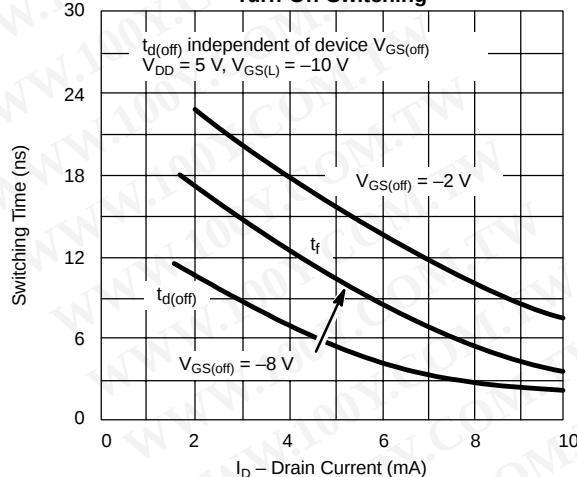


Capacitance vs. Gate-Source Voltage




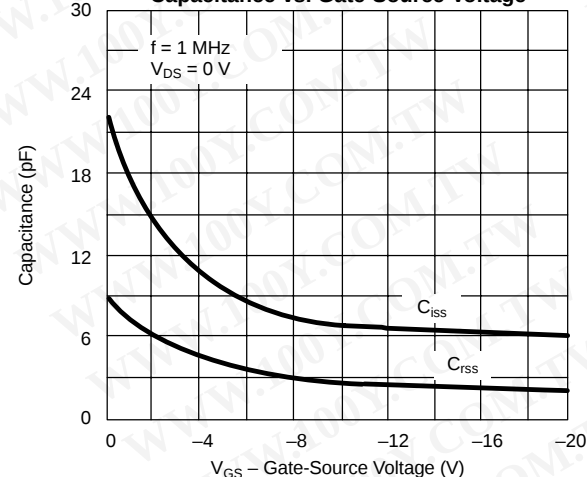


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

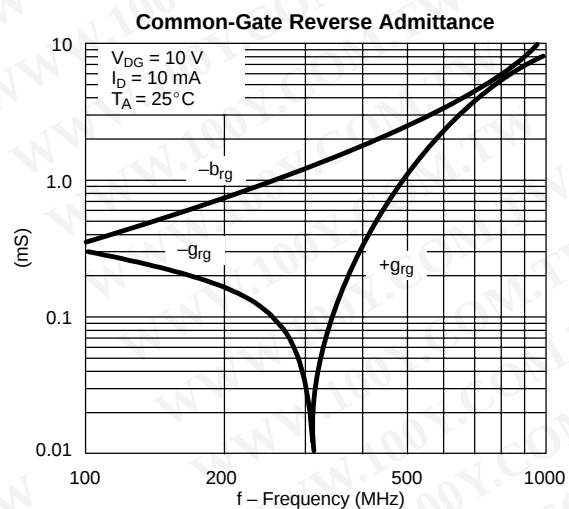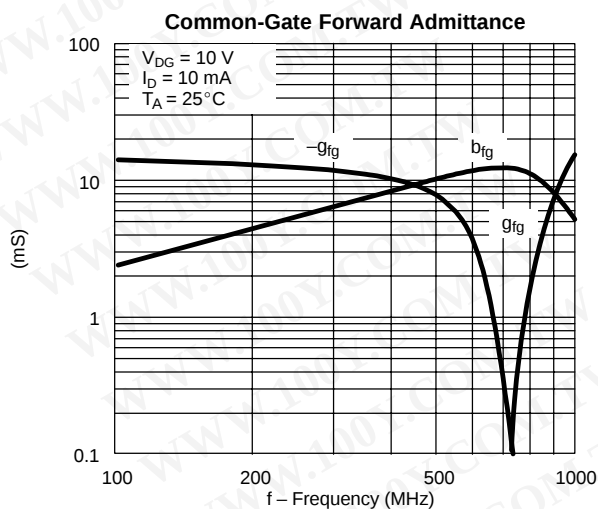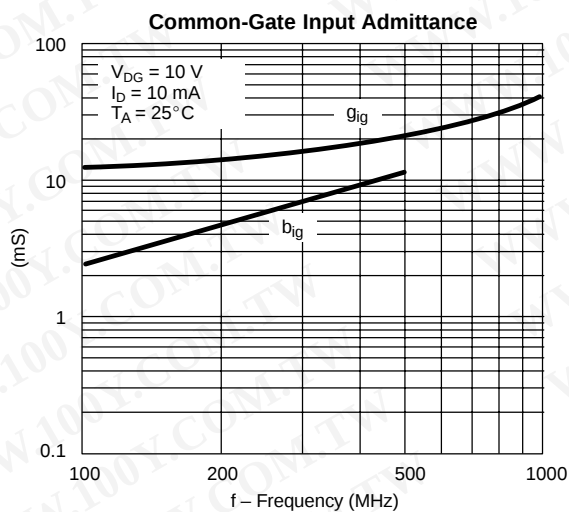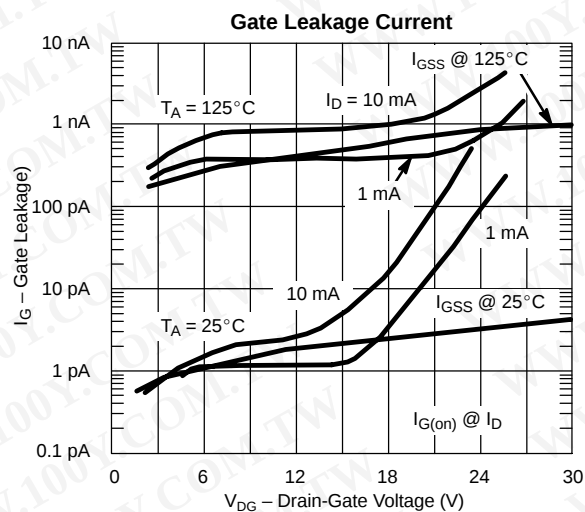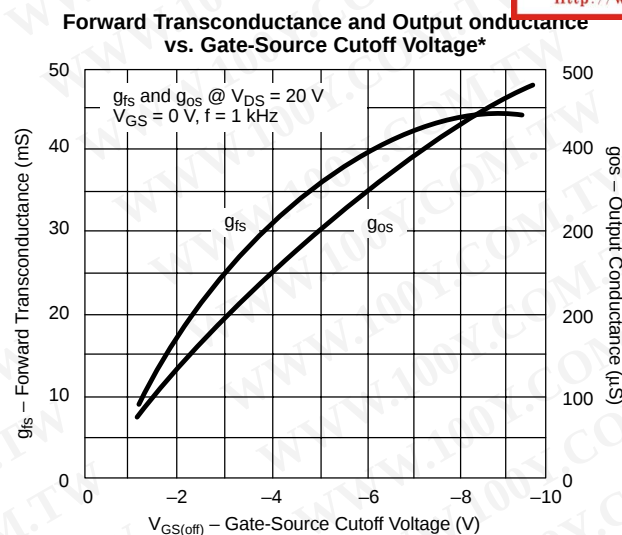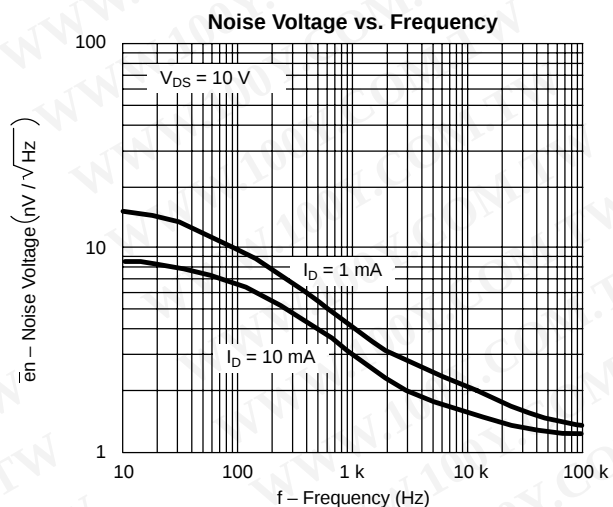

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

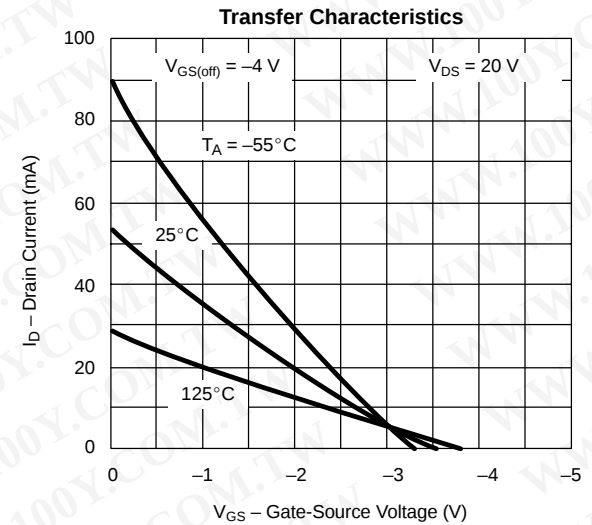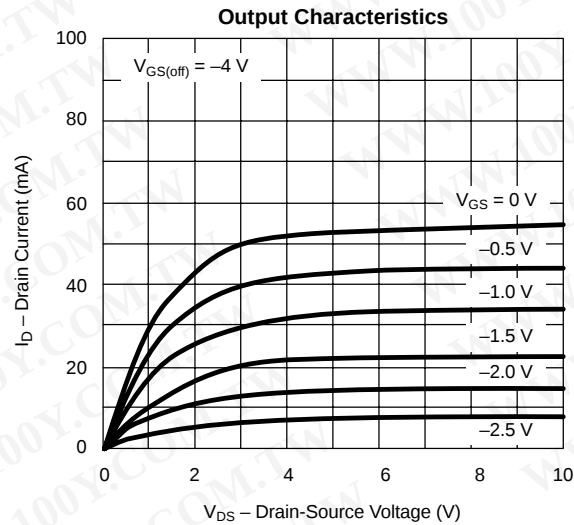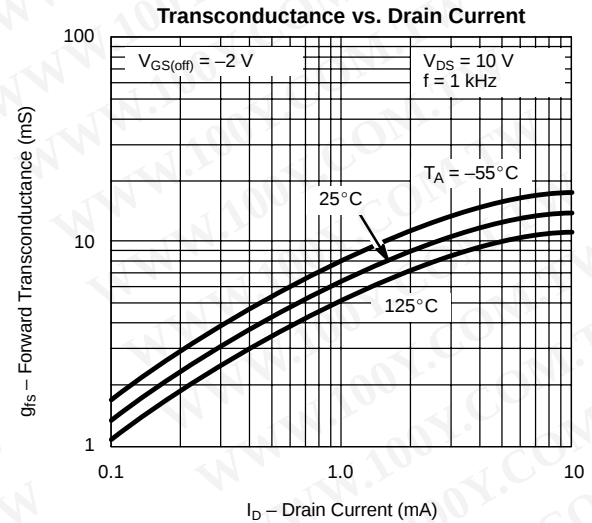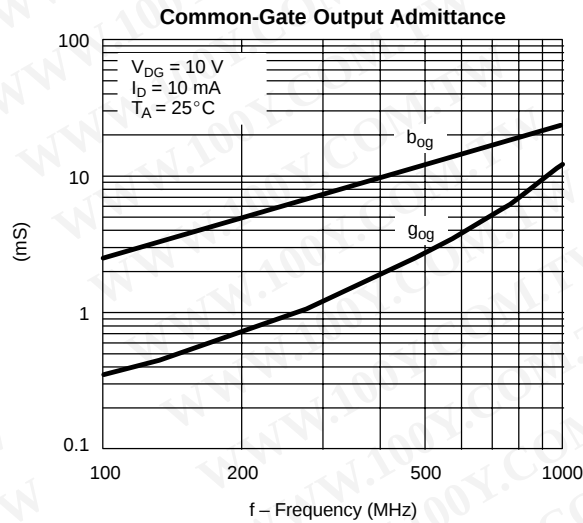

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SWITCHING TIME TEST CIRCUIT			
	4391	4392	4393
$V_{GS(L)}$	-12 V	-7 V	-5 V
R_L^*	800 Ω	1600 Ω	3000 Ω
$I_{D(on)}$	12 mA	6 mA	3 mA

*Non-inductive

INPUT PULSE

Rise Time < 1 ns
 Fall Time < 1 ns
 Pulse Width 100 ns
 PRF 1 MHz

SAMPLING SCOPE

Rise Time 0.4 ns
 Input Resistance 10 M Ω
 Input Capacitance 1.5 pF

See Typical Characteristics curves for changes.

