

# ER1A THRU ER1J

## SURFACE MOUNT SUPERFAST RECTIFIER VOLTAGE - 50 to 600 Volts CURRENT - 1.0 Ampere

### FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- High temperature soldering: 260  $\text{C}$ /10 seconds at terminals

### MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic


Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Indicated by cathode band

Standard packaging: 12mm tape (EIA-481)

Weight: 0.003 ounce, 0.093 gram

### SMB/DO-214AA

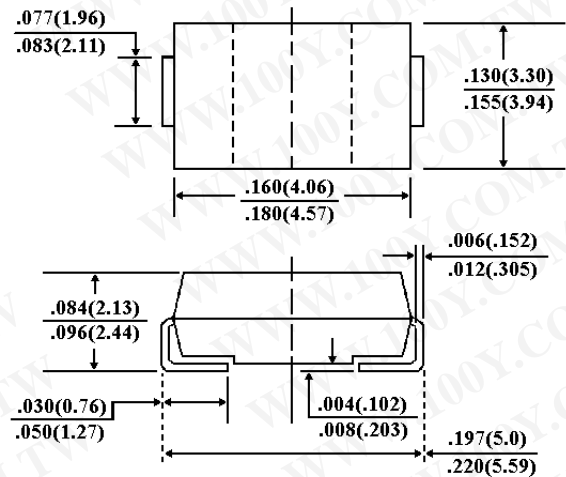

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25  $\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.


For capacitive load, derate current by 20%.

|   | SYMBOLS          | ER1A        | ER1B | ER1C | ER1D | ER1E | ER1G | ER1J | UNITS               |
|---|------------------|-------------|------|------|------|------|------|------|---------------------|
| Maximum Recurrent Peak Reverse Voltage  | $V_{RRM}$        | 50          | 100  | 150  | 200  | 300  | 400  | 600  | Volts               |
| Maximum RMS Voltage   | $V_{RMS}$        | 35          | 70   | 105  | 140  | 210  | 280  | 420  | Volts               |
| Maximum DC Blocking Voltage   | $V_{DC}$         | 50          | 100  | 150  | 200  | 300  | 400  | 600  | Volts               |
| Maximum Average Forward Rectified Current, at $T_L=100 \text{ C}$                               | $I_{(AV)}$       | 1.0         |      |      |      |      |      |      | Amps                |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method) | $I_{FSM}$        | 30.0        |      |      |      |      |      |      | Amps                |
| Maximum Instantaneous Forward Voltage at 1.0A   | $V_F$            | 0.95        |      |      | 1.25 |      | 1.7  |      | Volts               |
| Maximum DC Reverse Current $T_A=25 \text{ C}$   | $I_R$            | 5.0         |      |      |      |      |      |      | Eg A                |
| At Rated DC Blocking Voltage $T_A=100 \text{ C}$  |                  | 100         |      |      |      |      |      |      |                     |
| Maximum Reverse Recovery Time (Note 1)  | $T_{RR}$         | 35.0        |      |      |      |      |      |      | nS                  |
| Typical Junction capacitance (Note 2)   | $C_J$            | 10.0        |      |      |      |      |      |      | pF                  |
| Typical Thermal Resistance (Note 3)   | $R_{\theta KJL}$ | 34          |      |      |      |      |      |      | $\text{C}/\text{W}$ |
| Operating and Storage Temperature Range   | $T_J, T_{STG}$   | -50 to +150 |      |      |      |      |      |      | $\text{C}$          |


### NOTES:

1. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{rr}=0.25A$
2. Measured at 1 MHz and Applied reverse voltage of 4.0 volts
3.  $8.0\text{mm}^2$  (.013mm thick) land areas

RATING AND CHARACTERISTIC CURVES  
 ER1A THRU ER1J

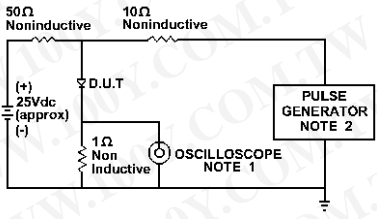

NOTE:1. Rise Time = 7ns max.  
 Input Impedance = 1 megohm. 22pF  
 2. Rise Time = 10ns max.  
 Source Impedance = 50 Ohms



SET TIME  
 BASE FOR  
 50 ns/cm

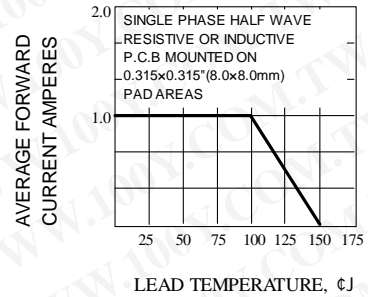


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

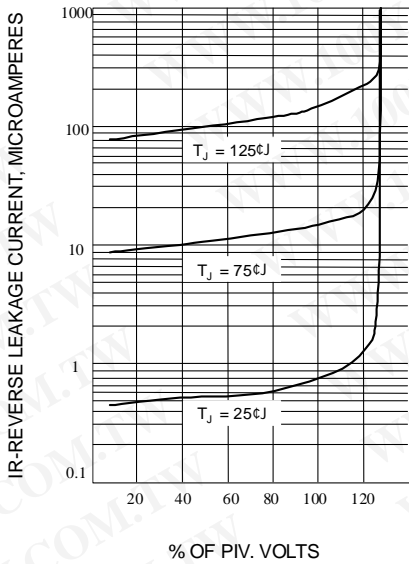


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

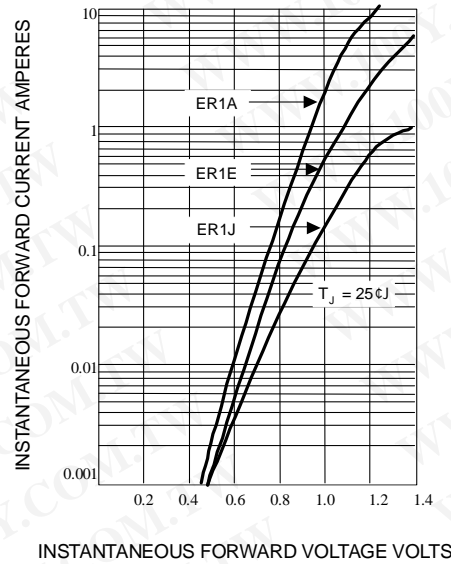


Fig. 4-TYPICAL FORWARD CHARACTERISTICS

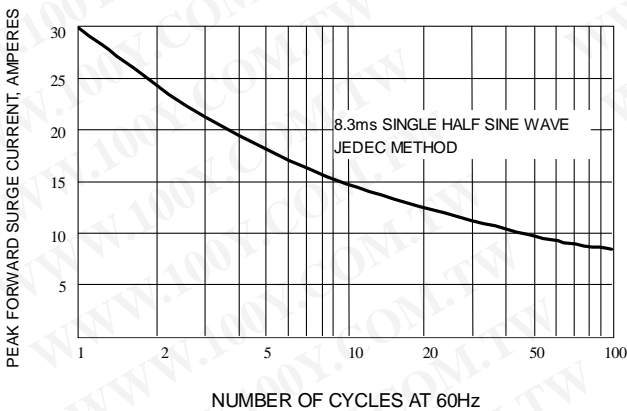


Fig. 5-MAXIMUM NON-REPETITIVE SURGE CURRENT

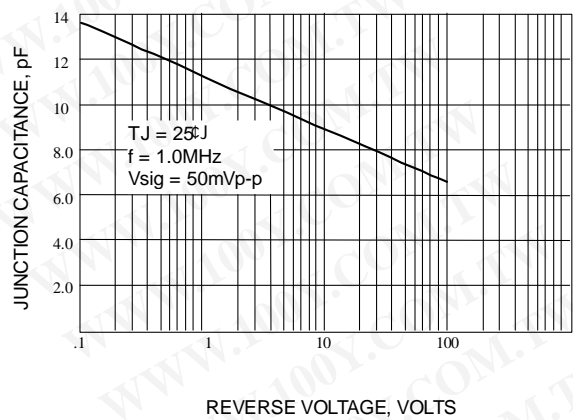


Fig. 6-TYPICAL JUNCTION CAPACITANCE