



DATA SHEET

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SK52~S510


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER
VOLTAGE- 20 to 100 Volts CURRENT- 5.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier. majority carrier conduction
- Low power loss,high efficiency
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C /10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic
 Terminals:Solder plated, solderable per MIL-STD-750, Method 2026
 Polarity: Color band denotes positive end (cathode)
 Standard packaging: 16mm tape (EIA-481)
 Weight: 0.007 ounce, 0.21 gram

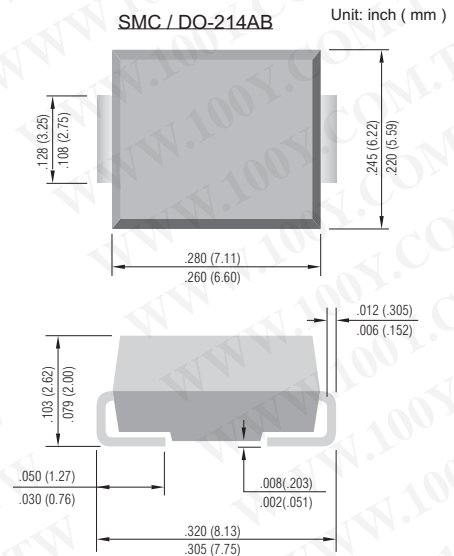

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Resistive or inductive load.

	SYMBOLS	SK52	SK53	SK54	SK55	SK56	SK58	SK59	S510	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20.0	30.0	40.0	50.0	60.0	80.0	90.0	100.0	V
Maximum RMS Voltage	V_{RMS}	14.0	21.0	28.0	35.0	42.0	56.0	63.0	70.0	V
Maximum DC Blocking Voltage	V_{DC}	20.0	30.0	40.0	50.0	60.0	80.0	90.0	100.0	V
Maximum Average Forward Rectified Current at T_L (See figure 1)	$I(AV)$					5.0				A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}					100.0				A
Maximum Instantaneous Forward Voltage at 5.0A (Note 1)	V_F	0.50		0.75		0.85			V	
Maximum DC Reverse Current (Note 1) $T_a= 25^\circ C$ at Rated DC Blocking Voltage $T_a=100^\circ C$	I_R					0.5 20.0				mA
Maximum Thermal Resistance(Note 2)	$R_{\theta JL}$ $R_{\theta JA}$					17.0 55.0				$^\circ C/W$
Operating and Storage Temperature Range T_J	T_J					-50 to +125				$^\circ C$
Storage Temperature Range	T_{STG}					-55 to +150				$^\circ C$

NOTES:
 A.Pulse Test with PW =300μsec, 2% Duty Cycle.
 B.Mounted on P.C. Board with 14mm² (.013mm thick) copper pad areas.



RATING AND CHARACTERISTIC CURVES

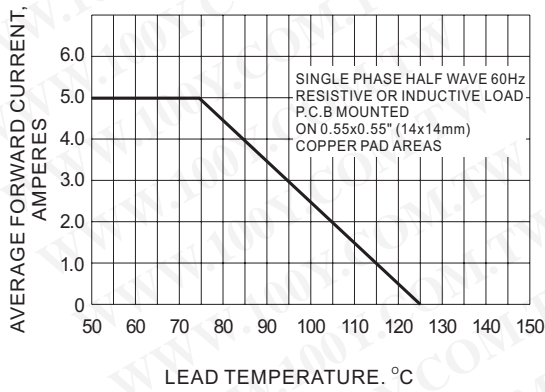


Fig. 1- FORWARD CURRENT DERATING CURVE

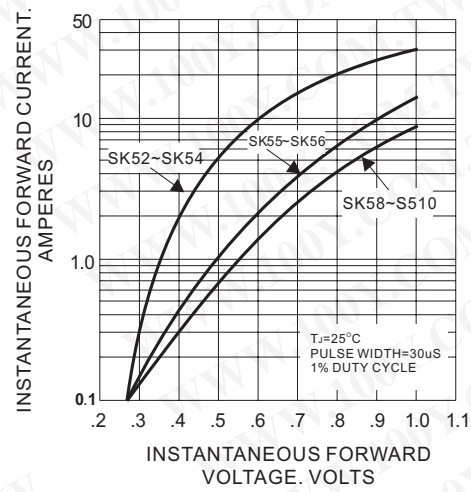


Fig. 2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

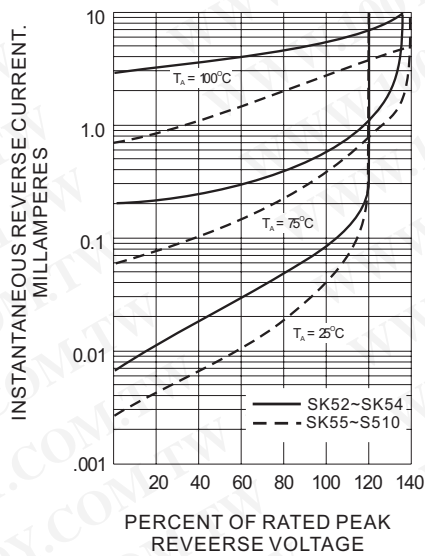


Fig. 3- TYPICAL REVERSE CHARACTERISTICS

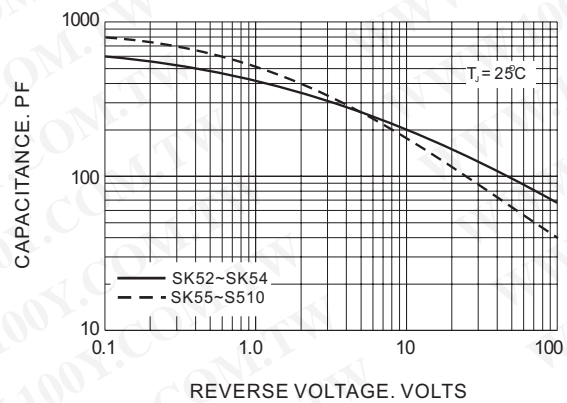


Fig. 4- TYPICAL JUNCTION CAPACITANCE

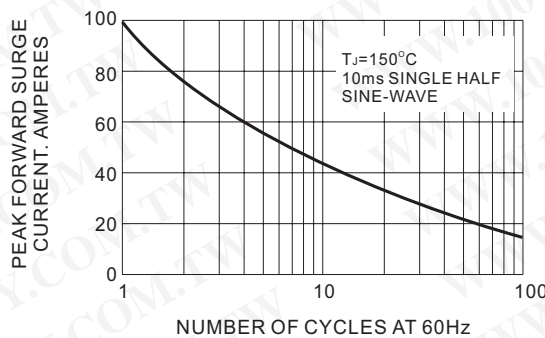


Fig. 5- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT