


Single Phase AC Controller Modules

PSW1C205
PSW1H205

$I_{RMS} = 230 \text{ A}$
 $V_{RRM} = 600-1600 \text{ V}$

Preliminary Data Sheet

V_{RSM} V_{DSM} (V)	V_{RRM} V_{DRM} (V)	Type	
700	600	PSW1C 205/06	PSW1H 205/06
900	800	PSW1C 205/08	PSW1H 205/08
1300	1200	PSW1C 205/12	PSW1H 205/12
1500	1400	PSW1C 205/14	PSW1H 205/14
1700	1600	PSW1C 205/16	PSW1H 205/16

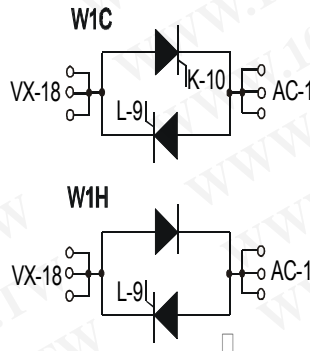

Symbol	Test Conditions	Maximum Ratings
I_{RMS}	$T_C = 85^\circ\text{C}; 50-400 \text{ Hz}$ (per single controller)	230 A
I_{TRMS}		180 A
I_{TAVM}	$T_C = 85^\circ\text{C}; 180^\circ \text{ sine}$	105 A
I_{TSM}	$T_{VJ} = 45^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	2250 A
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	2400 A
	$T_{VJ} = 125^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	2000 A
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	2150 A
$\int i^2 dt$	$T_{VJ} = 45^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	25300 A ² s
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	23900 A ² s
	$T_{VJ} = 125^\circ\text{C}$ $t = 10 \text{ ms}$ (50 Hz), sine	20000 A ² s
	$V_R = 0$ $t = 8.3 \text{ ms}$ (60 Hz), sine	19100 A ² s
$(di/dt)_{cr}$	$T_{VJ} = 125^\circ\text{C}$ repetitive, $I_T = 250 \text{ A}$ $f=50\text{Hz}, t_p=200\mu\text{s}$	150 A/ μs
	$V_D = 2/3V_{DRM}$ $I_G = 0.45 \text{ A}$ non repetitive, $I_T = I_{TAVM}$ $di_G/dt = 0.45\text{A}/\mu\text{s}$	500 A/ μs
$(dv/dt)_{cr}$	$T_{VJ} = 125^\circ\text{C}$ $V_D = 2/3V_{DRM}$ $R_{GK} = \infty$, method 1 (linear voltage rise)	1000 V/ μs
P_{GM}	$T_{VJ} = 125^\circ\text{C}$ $t_p = 30\mu\text{s}$	$\leq 10 \text{ W}$
	$I_T = I_{TAVM}$ $t_p = 300\mu\text{s}$	$\leq 5 \text{ W}$
P_{GAVM}		0.5 W
V_{RGM}		10 V
T_{VJ}		-40... + 125 °C
T_{VJM}		125 °C
T_{stg}		-40... + 125 °C
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	3000 V~
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3600 V~
M_d	Mounting torque (M4)	1.5 - 2.0 Nm
		14 - 18 lb.in.
Weight	typ.	24 g

Features

- Thyristor controller for AC (circuit W1C acc. to IEC) for mains frequency □
- Isolation voltage 3000 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering
- UL registered, E 148688

Applications

- Switching and control of single and three phase AC circuits
- Light and temperature control
- Softstart AC motor controller
- Solid state switches

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling capability
- High power density
- Small and light weight

Data according to IEC 60747 refer to a single thyristor unless otherwise stated


Symbol	Test Conditions	Characteristic Value
$I_{D,R}$	$T_{VJ} = 125^{\circ}\text{C}$, $V_R = V_{RRM}$, $V_D = V_{DRM} \leq$	5 mA
V_T	$I_T = 300\text{ A}$, $T_{VJ} = 25^{\circ}\text{C}$	$\leq 1.5\text{ V}$
V_{TO}	For power-loss calculations only	0.8 V
r_T		2.4 m Ω
V_{GT}	$V_D = 6\text{V}$, $T_{VJ} = 25^{\circ}\text{C}$	$\leq 1.5\text{ V}$
	$T_{VJ} = -40^{\circ}\text{C}$	$\leq 1.6\text{ V}$
I_{GT}	$V_D = 6\text{V}$, $T_{VJ} = 25^{\circ}\text{C}$	$\leq 150\text{ mA}$
	$T_{VJ} = -40^{\circ}\text{C}$	$\leq 200\text{ mA}$
V_{GD}	$T_{VJ} = 125^{\circ}\text{C}$, $V_D = 2/3V_{DRM}$	$\leq 0.2\text{ V}$
I_{GD}	$T_{VJ} = 125^{\circ}\text{C}$, $V_D = 2/3V_{DRM}$	$\leq 10\text{ mA}$
I_L	$T_{VJ} = 25^{\circ}\text{C}$, $t_p = 10\mu\text{s}$	$\leq 450\text{ mA}$
	$I_G = 0.45\text{A}$, $dI_G/dt = 0.45\text{A}/\mu\text{s}$	
I_H	$T_{VJ} = 25^{\circ}\text{C}$, $V_D = 6\text{V}$, $R_{GK} = \infty$	$\leq 200\text{ mA}$
t_{gd}	$T_{VJ} = 25^{\circ}\text{C}$, $V_D = 1/2V_{DRM}$	$\leq 2\mu\text{s}$
	$I_G = 0.45\text{A}$, $dI_G/dt = 0.45\text{A}/\mu\text{s}$	
R_{thJC}	per thyristor; DC	0.26 K/W
	per module	0.13 K/W
R_{thJK}	per thyristor; sine 180° el	0.46 K/W
	per module	0.23 K/W
d_s	Creeping distance on surface	11.2 mm
d_A	Creeping distance in air	17.0 mm
a	Max. allowable acceleration	50 m/s ²

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Package style and outline

Dimensions in mm (1mm = 0.0394")

W1C

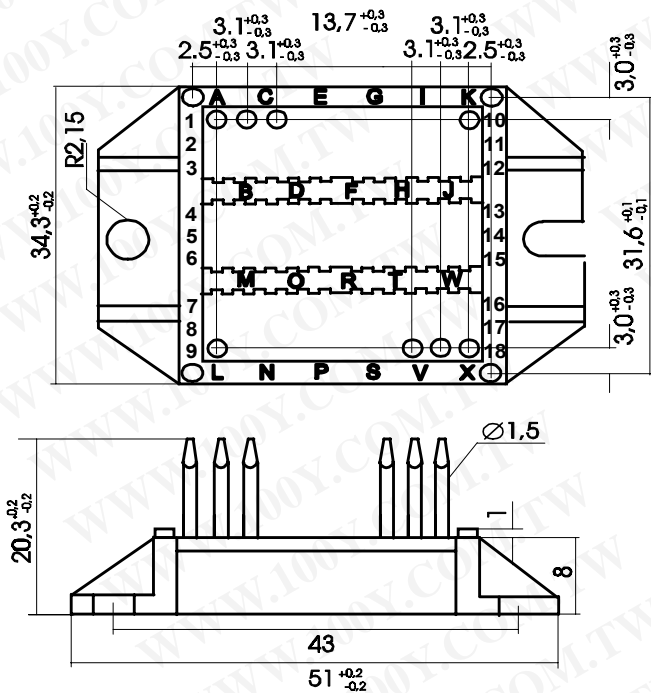

W1H

