
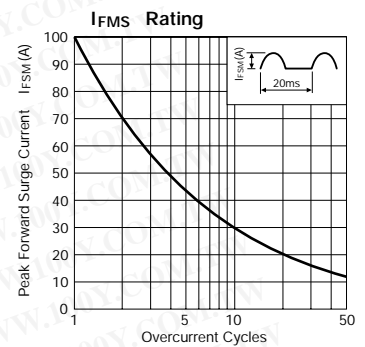






Rectifier Diodes

| Parameter Type No. | Absolute Maximum Ratings | | | | | Electrical Characteristics (Ta=25°C) | | | | Others | | |
|-----------------------|--------------------------|---|--|---------------------|-----------------------|--------------------------------------|---|--|--|-----------------------------|----------|------|
| | V _{RM} (V) | I _{F(AV)} (A) With Heatsink | I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot | T _J (°C) | T _{stg} (°C) | V _F (V) max | I _R (μA) I _F (A) | I _R (H) (μA) V _R =V _{RM} max | I _R (H) (μA) V _R =V _{RM} Ta=100°C max | R _{th(j-c)} (°C/W) | Mass (g) | Fig. |
| FMM-22S, R | 200 | 10 | 100 | -40 to +150 | | 1.1 | 5.0 | 10 | 100 | 4.0 | 2.1 | Ⓐ |
| FMM-24S, R | 400 | | | | | | | | | | | |
| FMM-26S, R | 600 | | | | | | | | | | | |
| FMM-31S, R | 100 | 20 | 120 | -40 to +150 | | 1.1 | 10.0 | 10 | 100 | 2.0 | 5.5 | Ⓑ |
| FMM-32S, R | 200 | | | | | | | | | | | |
| FMM-34S, R | 400 | | | | | | | | | | | |
| FMM-36S, R | 600 | | | | | | | | | | | |

FMM-2 series



FMM-3 series

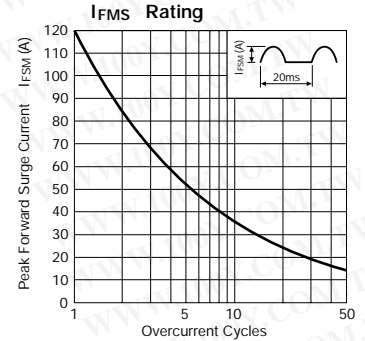

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

External Dimensions (Unit: mm)

Flammability:
UL94V-0 or Equivalent

