



勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
Http://www.100y.com.tw

# TIP35CW TIP36CW

## Complementary Silicon High Power Transistors


### Features

- STMicroelectronics PREFERRED SALESTYPES


### Description

The device is a silicon Epitaxial-Base NPN transistor mounted in TO-247 plastic package. It is intended for use in power amplifier and switching applications.

The complementary PNP type is TIP36CW.

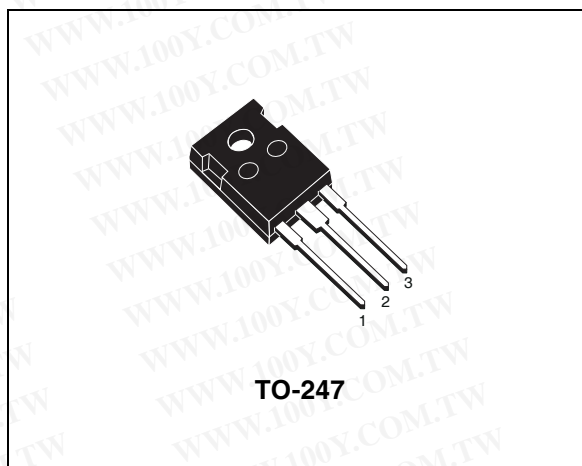

### Internal Schematic Diagram

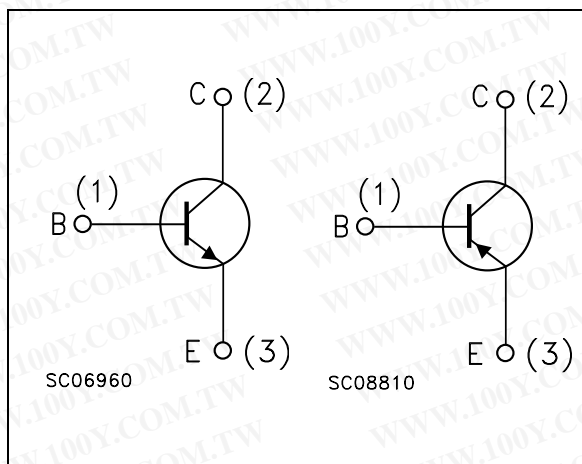

### Order Codes

Part Number	Marking	Package	Packing
TIP35CW	TIP35C W	TO-247	Tube
TIP36CW	TIP36C W	TO-247	Tube

# 1 Absolute Maximum Ratings

**Table 1. Absolute Maximum Rating**

Symbol	Parameter		Value	Unit
		NPN	TIP35CW	
		PNP	TIP36CW	
$V_{CBO}$	Collector-Base Voltage ( $I_E = 0$ )		100	V
$V_{CEO}$	Collector-Emitter Voltage ( $I_B = 0$ )		100	V
$V_{EBO}$	Emitter-Base Voltage ( $I_C = 0$ )		5	V
$I_C$	Collector Current		25	A
$I_{CM}$	Collector Peak Current ( $t_p < 5\text{ms}$ )		50	A
$I_B$	Base Current		5	A
$P_{tot}$	Total Dissipation at $T_c = 25^\circ\text{C}$		125	W
$T_{stg}$	Storage Temperature		-65 to 150	$^\circ\text{C}$
$T_J$	Max. Operating Junction Temperature		150	$^\circ\text{C}$

Note: For PNP types voltage and current values are negative.

**Table 2. Thermal Data**

Symbol	Parameter	Value	Unit
$R_{thj-case}$	Thermal Resistance Junction-Case	Max 1	$^\circ\text{C/W}$

## 2 Electrical Characteristics

**Table 3. Electrical Characteristics** ( $T_{\text{case}} = 25^{\circ}\text{C}$ ; unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{\text{CEO}}$	Collector Cut-off Current ( $I_{\text{B}} = 0$ )	$V_{\text{CE}} = 60 \text{ V}$			1	mA
$I_{\text{EBO}}$	Emitter Cut-off Current ( $I_{\text{C}} = 0$ )	$V_{\text{EB}} = 5 \text{ V}$			1	mA
$I_{\text{CES}}$	Collector Cut-off Current ( $V_{\text{BE}} = 0$ )	$V_{\text{CE}} = \text{Rated } V_{\text{CEO}}$			0.7	mA
$V_{\text{CEO(sus)}}$ <i>Note: 1</i>	Collector-Emitter Sustaining Voltage ( $I_{\text{B}} = 0$ )	$I_{\text{C}} = 30 \text{ mA}$	100			V
$h_{\text{FE}}$ <i>Note: 1</i>	DC Current Gain	$I_{\text{C}} = 1.5 \text{ A}$ $V_{\text{CE}} = 4 \text{ V}$ $I_{\text{C}} = 15 \text{ A}$ $V_{\text{CE}} = 4 \text{ V}$	25 10		50	
$V_{\text{CE(sat)}}$ <i>Note: 1</i>	Collector-Emitter Saturation Voltage	$I_{\text{C}} = 15 \text{ A}$ $I_{\text{B}} = 1.5 \text{ A}$ $I_{\text{C}} = 25 \text{ A}$ $I_{\text{B}} = 5 \text{ A}$			1.8 4	V V
$V_{\text{BE(on)}}$ <i>Note: 1</i>	Base-Emitter Voltage	$I_{\text{C}} = 15 \text{ A}$ $V_{\text{CE}} = 4 \text{ V}$ $I_{\text{C}} = 25 \text{ A}$ $V_{\text{CE}} = 4 \text{ V}$			2 4	V V
$f_{\text{T}}$	Transition Frequency	$I_{\text{C}} = 1 \text{ A}$ $V_{\text{CE}} = 10 \text{ V}$ $f = 1 \text{ MHz}$	3			MHz
$h_{\text{fe}}$	Small Signal Current Gain	$I_{\text{C}} = 1 \text{ A}$ $V_{\text{CE}} = 10 \text{ V}$ $f = 1 \text{ MHz}$	25			

Note: 1 Pulsed duration = 300  $\mu\text{s}$ , duty cycle  $\leq 1.5\%$ .


2 For PNP types voltage and current values are negative.

### 3 Package Mechanical Data

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect . The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: [www.st.com](http://www.st.com)

**TO-247 MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.7		5.3	0.185		0.209
D	2.2		2.6	0.087		0.102
E	0.4		0.8	0.016		0.031
F	1		1.4	0.039		0.055
F3	2		2.4	0.079		0.094
F4	3		3.4	0.118		0.134
G		10.9			0.429	
H	15.3		15.9	0.602		0.626
L	19.7		20.3	0.776		0.779
L3	14.2		14.8	0.559		0.582
L4		34.6			1.362	
L5		5.5			0.217	
M	2		3	0.079		0.118

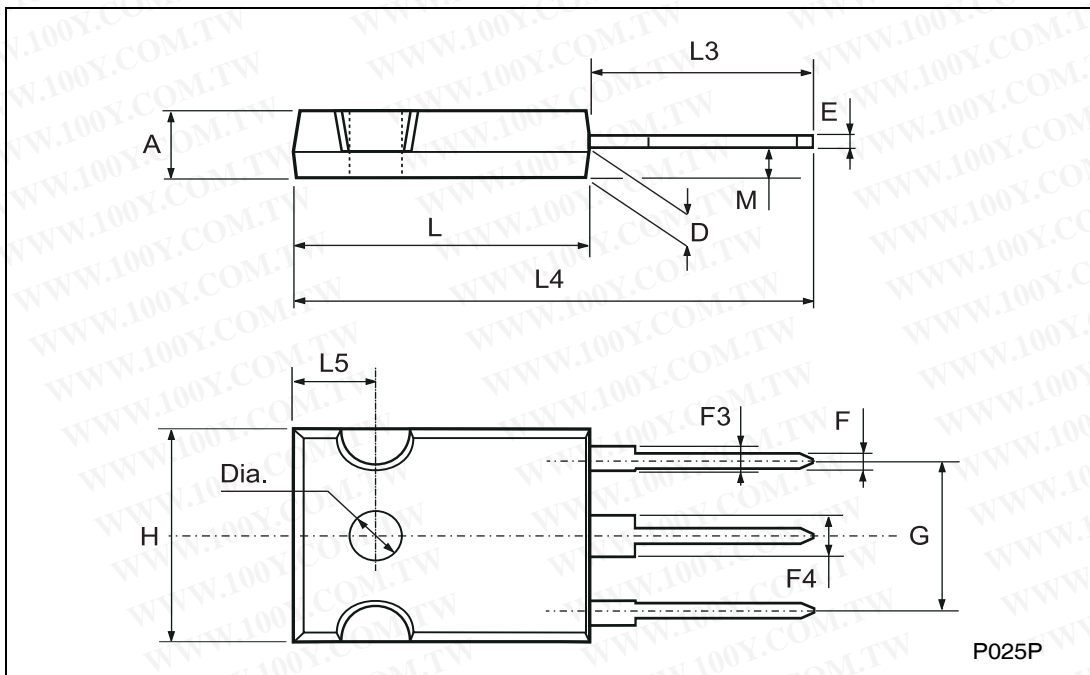

## 4 Revision History

Date	Revision	Changes
02-Nov-2005	1	Initial release.
12-Dec-2005	2	Added the ECOPACK Label.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.  
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

