


200 V - 1.5 A ultrafast recovery diode

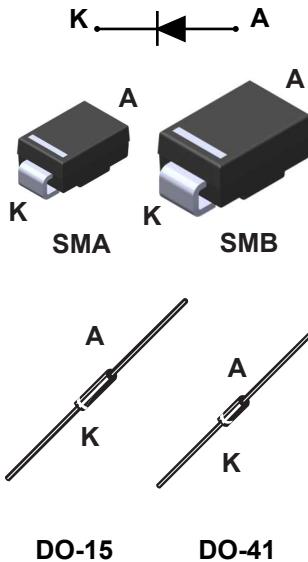

Features

- Very low conduction losses
- Negligible switching losses
- Low forward voltage drop
- High junction temperature
- ECOPACK®2

Applications

- Switching diode
- LED Lighting
- Auxiliary power supply
- Flyback diode

Description

The **STTH1R02** uses ST's new 200 V planar Pt doping technology, and it is specially suited for switching mode base drive and transistor circuits.

Packaged in SMA, SMB, DO-41 and DO-15, the **STTH1R02** is ideal for use low voltage, high frequency inverters, free wheeling and polarity protection

Product status	
STTH1R02	
Product summary	
Symbol	Value
$I_{F(AV)}$	1.5 A
V_{RRM}	200 V
$T_j(\text{max.})$	175 °C
$V_F(\text{typ.})$	0.7 V
$t_{rr}(\text{typ.})$	15 ns

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1 Characteristics

Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)

Symbol	Parameter			Value	Unit
V_{RRM}	Repetitive peak reverse voltage			200	V
$I_{F(AV)}$	Average forward current $\delta = 0.5$, square wave	SMA, SMB	$T_L = 150 \text{ }^\circ\text{C}$	1.5	A
		DO-41, DO-15	$T_L = 135 \text{ }^\circ\text{C}$		
I_{FSM}	Surge non repetitive forward current			$t_p = 10 \text{ ms sinusoidal}$	60 A
T_{stg}	Storage temperature range			-65 to +175	°C
T_j	Operating junction temperature			+175	°C

Table 2. Thermal resistance parameter

Symbol	Parameter			Max. value	Unit
$R_{th(j-l)}$	Junction to lead	SMA, SMB	30	°C/W	
$R_{th(j-l)}$			45		

For more information, please refer to the following application note :

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristics

Symbol	Parameter	Test conditions		Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25 \text{ }^\circ\text{C}$	$V_R = V_{RRM}$	-		3	μA
		$T_j = 125 \text{ }^\circ\text{C}$		-	2	20	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25 \text{ }^\circ\text{C}$	$I_F = 1.5 \text{ A}$	-	0.89	1.00	V
		$T_j = 100 \text{ }^\circ\text{C}$		-	0.76	0.85	
		$T_j = 150 \text{ }^\circ\text{C}$		-	0.70	0.80	

1. Pulse test: $t_p = 5 \text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380 \mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 0.68 \times I_{F(AV)} + 0.08 \times I_F^2(\text{RMS})$$

For more information, please refer to the following application notes related to the power losses :

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Table 4. Dynamic characteristics ($T_j = 25^\circ\text{C}$ unless otherwise stated)

Symbol	Parameters	Test conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	$I_F = 1 \text{ A}, dI_F/dt = -50 \text{ A}/\mu\text{s}, V_R = 30 \text{ V}$	-	23	30	ns
		$I_F = 1 \text{ A}, dI_F/dt = -100 \text{ A}/\mu\text{s}, V_R = 30 \text{ V}$	-	15	20	
I_{RM}	Reverse recovery current	$I_F = 1.5 \text{ A}, dI_F/dt = -200 \text{ A}/\mu\text{s}, V_R = 160 \text{ V}, T_j = 125^\circ\text{C}$	-	3	4	A
t_{fr}	Forward recovery time	$I_F = 1.5 \text{ A}, dI_F/dt = 100 \text{ A}/\mu\text{s}, V_{FR} = 1.1 V_{F(\max.)}$	-	50		ns
V_{FP}	Forward recovery voltage	$I_F = 1.5 \text{ A}, dI_F/dt = 100 \text{ A}/\mu\text{s}$	-	2.1		V

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

1.1 Characteristics (curves)

Figure 1. Peak current versus duty cycle

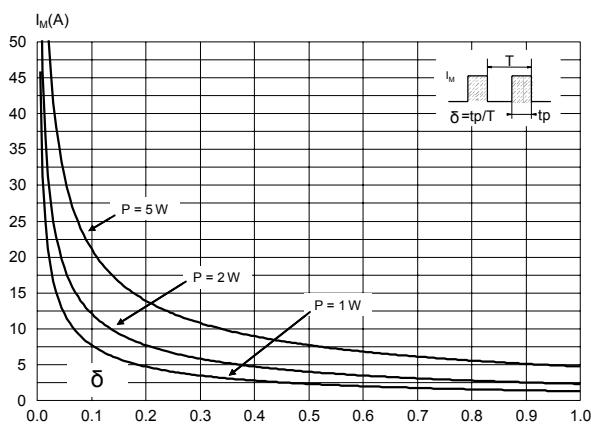


Figure 2. Forward voltage drop versus forward current (typical values)

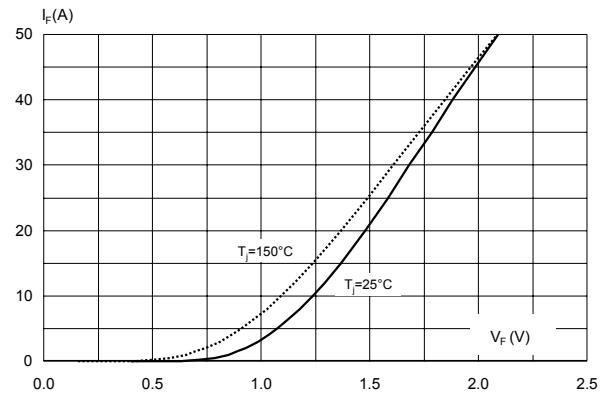


Figure 3. Forward voltage drop versus forward current (maximum values)


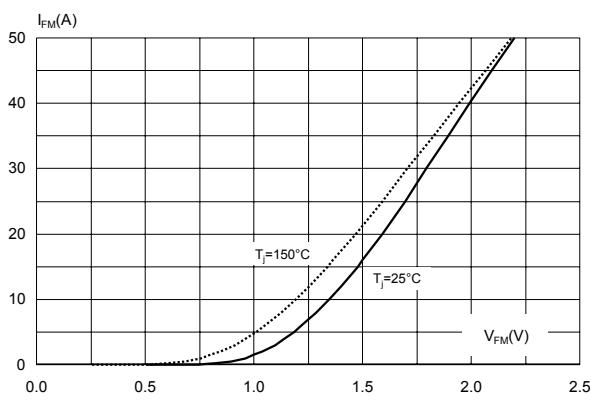


Figure 4. Relative variation of thermal impedance junction to lead versus pulse duration (SMA)

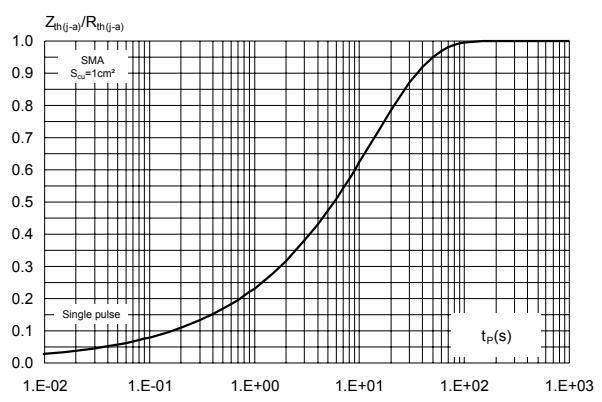

勝特力材料 886-3-5758170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Figure 5. Relative variation of thermal impedance junction to lead versus pulse duration (SMB)

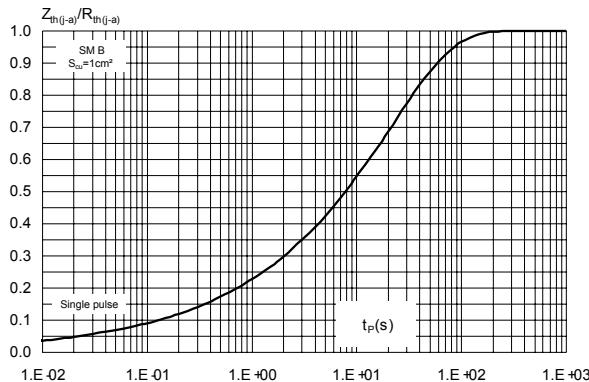


Figure 6. Relative variation of thermal impedance junction to lead versus pulse duration (DO-41)

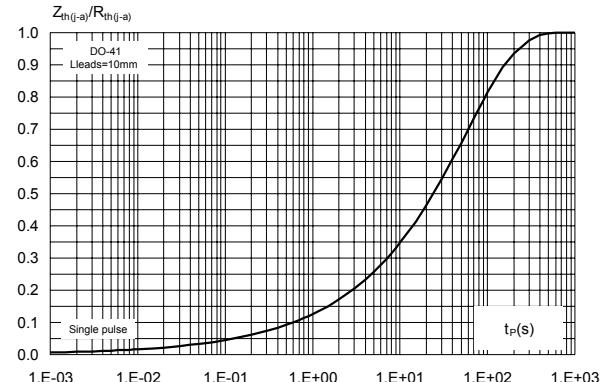


Figure 7. Relative variation of thermal impedance junction to lead versus pulse duration (DO-15)

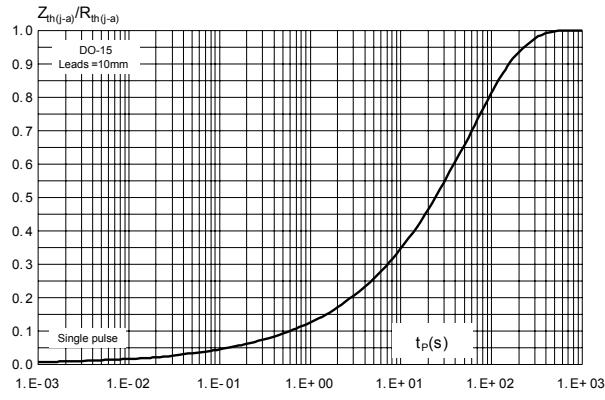


Figure 8. Junction capacitance versus reverse voltage applied (typical values)

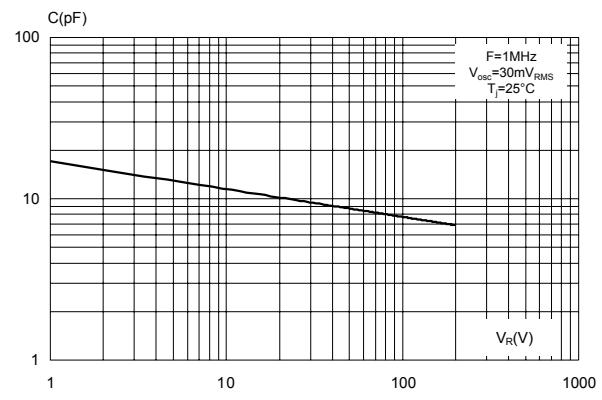


Figure 9. Reverse recovery charges versus dI_F/dt (typical values)


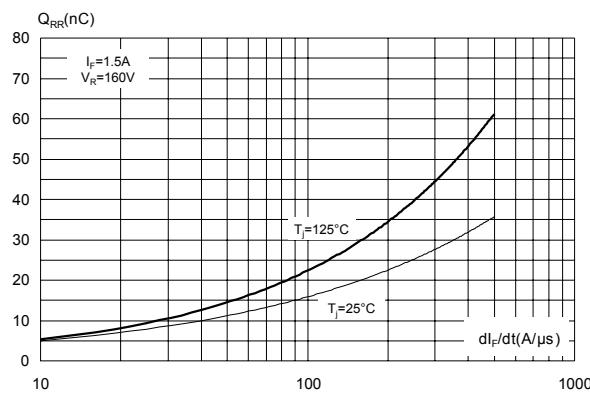


Figure 10. Reverse recovery time versus dI_F/dt (typical values)

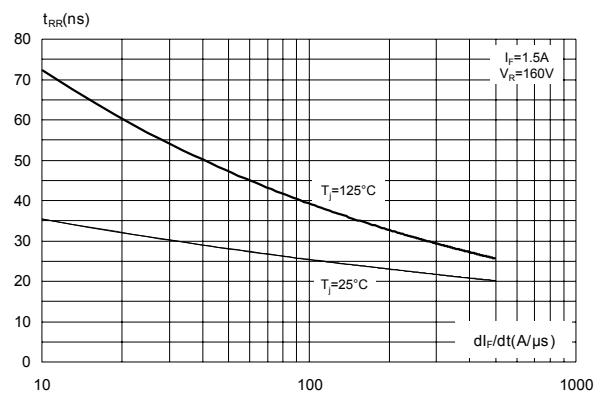

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Figure 11. Peak reverse recovery current versus dI_F/dt (typical values)

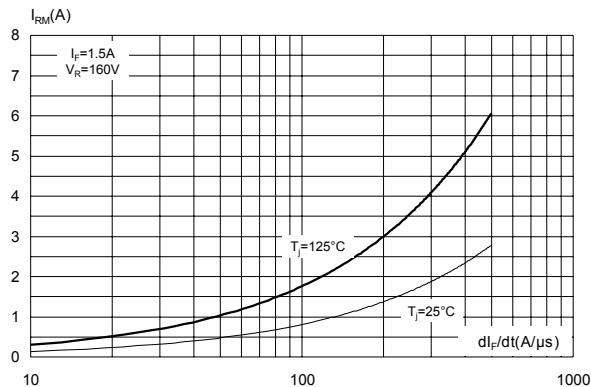


Figure 12. Relative variations of dynamic parameters versus junction temperature

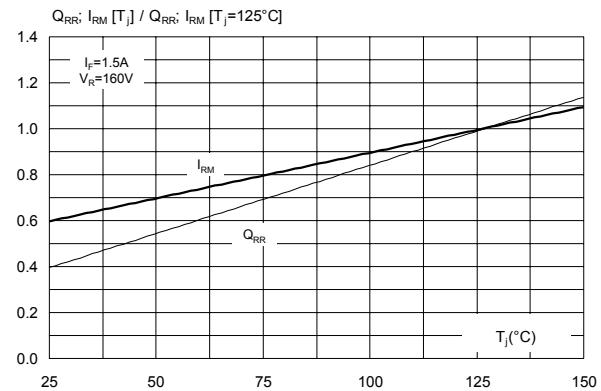


Figure 13. Thermal resistance junction to ambient versus copper surface under each lead (typical values)

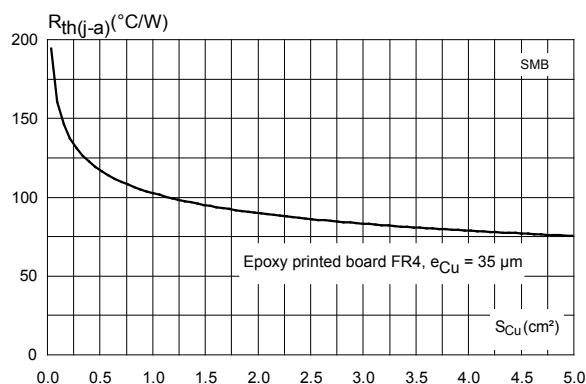


Figure 14. Thermal resistance junction to ambient versus copper surface under each lead (typical values)

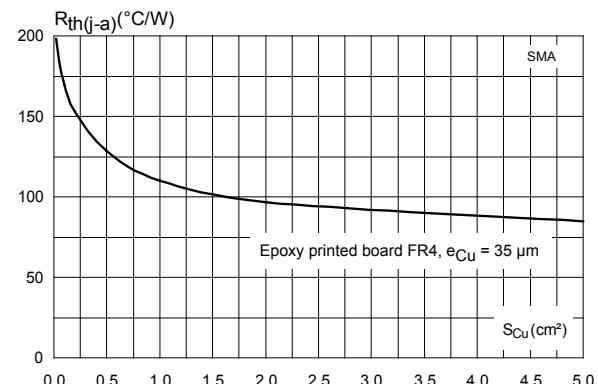


Figure 15. Thermal resistance junction to ambient versus lead length (DO-41)


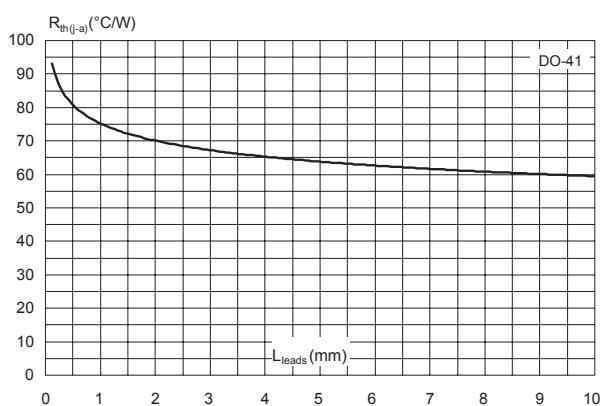


Figure 16. Thermal resistance junction to ambient versus lead length (DO-15)

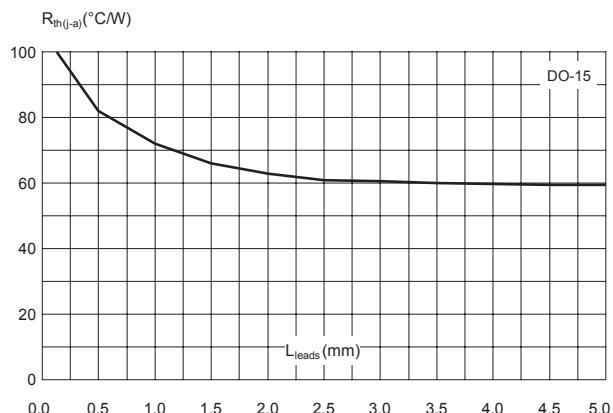


2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

2.1 SMB package information

- Epoxy meets UL94, V0
- Lead-free package


Figure 17. SMB package outline

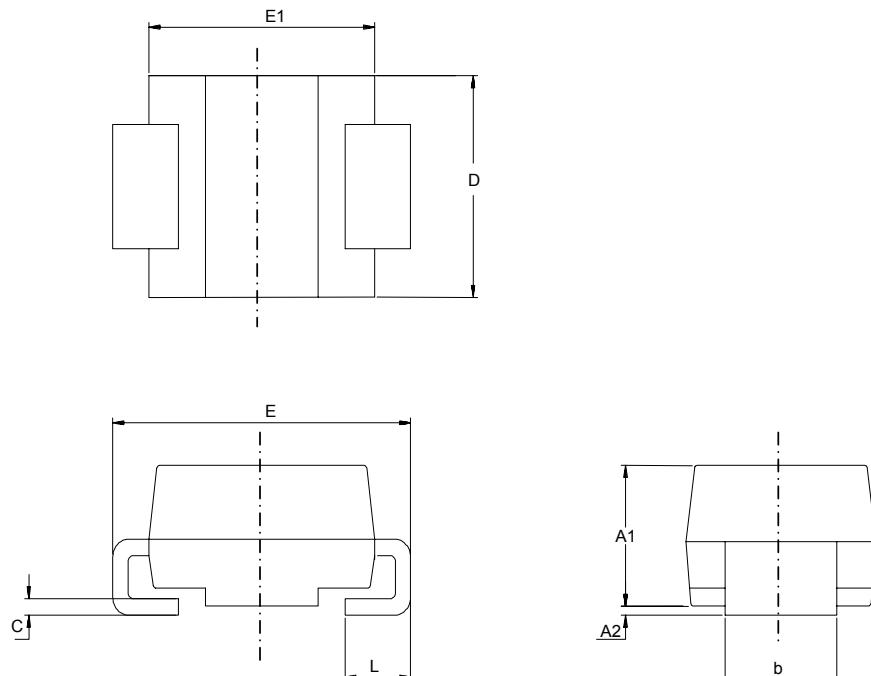

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Table 5. SMB package mechanical data

Ref.	Dimensions			
	Millimeters		Inches (for reference only)	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.074	0.097
A2	0.05	0.20	0.001	0.008
b	1.95	2.20	0.076	0.087
c	0.15	0.40	0.005	0.016
D	3.30	3.95	0.129	0.156
E	5.10	5.60	0.200	0.221
E1	4.05	4.60	0.159	0.182
L	0.75	1.50	0.029	0.060

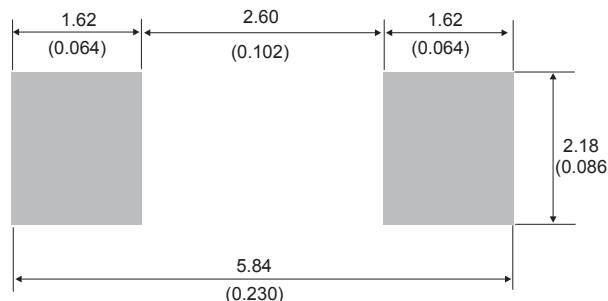Figure 18. SMB recommended footprint

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2.2 SMA package information

- Epoxy meets UL94, V0
- Cooling method : by conduction (C)

Figure 19. SMA package outline


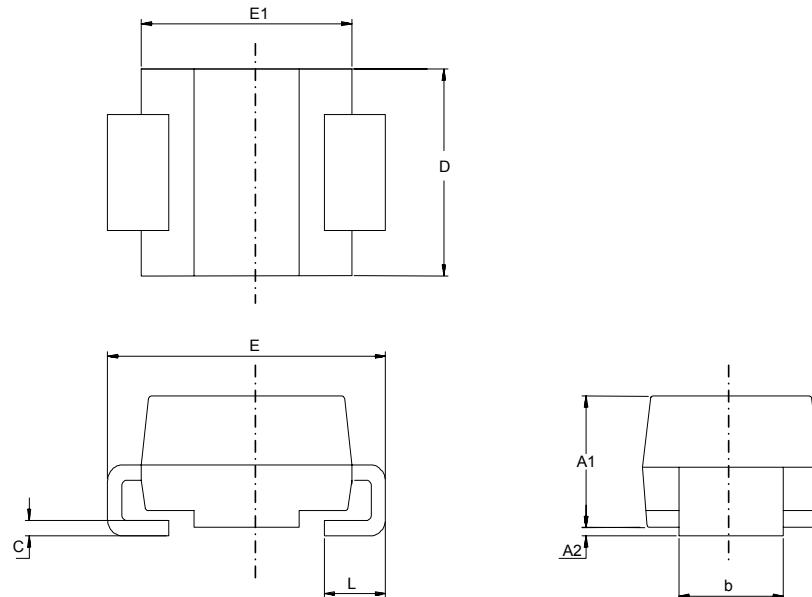


Table 6. SMA package mechanical data

Ref.	Dimensions			
	Millimeters		Inches (for reference only)	
	Min.	Max.	Min.	Max.
A1	1.90	2.45	0.074	0.097
A2	0.05	0.20	0.001	0.008
b	1.25	1.65	0.049	0.065
c	0.15	0.40	0.005	0.016
D	2.25	2.90	0.088	0.115
E	4.80	5.35	0.188	0.211
E1	3.95	4.60	0.155	0.182
L	0.75	1.50	0.029	0.060

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Figure 20. SMA recommended footprint in mm (inches)

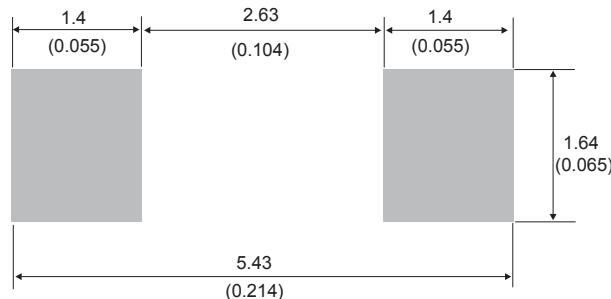

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2.3 DO-41 package information

- Epoxy meets UL 94, V0

Figure 21. DO-41 package outline

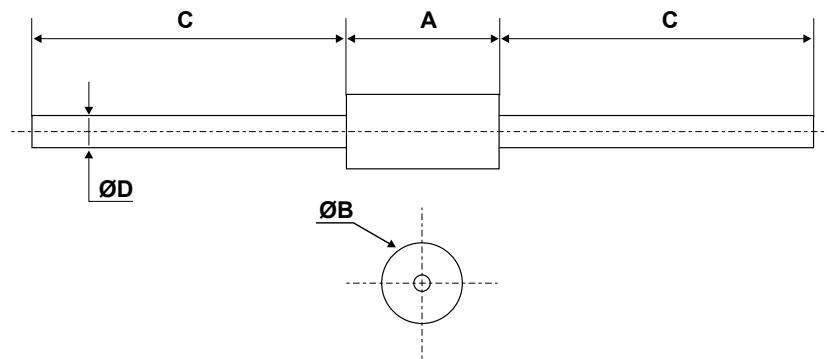


Table 7. DO-41 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	4.07	-	5.20	0.160	-	0.205
B	2.04	-	2.71	0.080	-	0.107
C	25.40	-		1.000	-	
D	0.71	-	0.86	0.028	-	0.0034

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2.4 DO-15 package information

- Epoxy meets UL 94, V0

Figure 22. DO-15 package outline

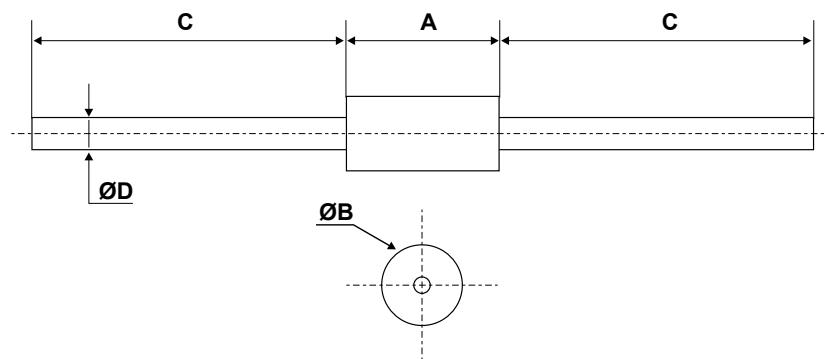


Table 8. DO-15 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches (for reference only)		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.05	-	6.75	0.238	-	0.266
B	2.95	-	3.53	0.116	-	0.139
C	26.00	-	31.00	1.024	-	1.220
D	0.71	-	0.88	0.028	-	0.0035

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

3 Ordering information

Table 9. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH1R02A	R1A	SMA	0.068 g	5000	Tape and reel
STTH1R02U	1R2S	SMB	0.107 g	2500	Tape and reel
STTH1R02	STTH1R02	DO-41	0.34 g	2000	Ammopack
STTH1R02RL	STTH1R02	DO-41	0.34 g	5000	Tape and reel
STTH1R02Q	STTH1R02Q	DO-15	0.40 g	1000	Ammopack
STTH1R02QRL	STTH1R02Q	DO-15	0.40 g	6000	Tape and reel

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Revision history

Table 10. Document revision history

Date	Revision	Changes
03-May-2006	1	First issue.
13-Oct-2006	2	Added DO-15 and SMB packages.
08-Mar-2007	3	Replaced Figure 8. Replaced ecu with copper thickness.
05-Dec-2018	4	Updated Section Applications . Minor text changes.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)