



SRA1620 THRU SRA1660

16.0 AMPS. Schottky Barrier Rectifiers



Voltage Range
20 to 60 Volts
Current
16.0 Amperes


TO-220A

Features

- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ High reliability
- ◇ High surge current capability

Mechanical Data

- ◇ Cases: TO-220A molded plastic
- ◇ Epoxy: UL 94V-O rate flame retardant
- ◇ Terminals: Leads solderable per MIL-STD-202, Method 208 guaranteed
- ◇ Polarity: As marked
- ◇ High temperature soldering guaranteed: 260°C/10 seconds.25", (6.35mm) from case.
- ◇ Weight: 2.24 grams

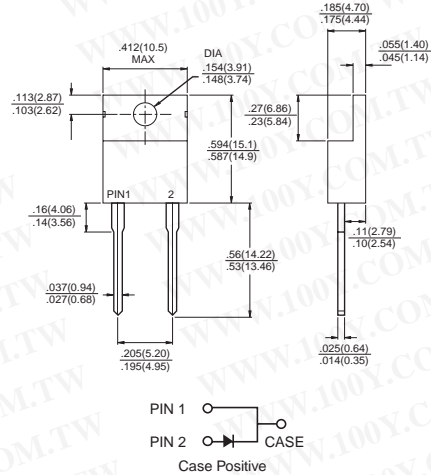

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	SR 1620	SRA 1630	SRA 1640	SRA 1650	SRA 1660	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	V
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	V
Maximum Average Forward Rectified Current See Fig. 1	$I_{(AV)}$	16.0					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	275					A
Maximum Instantaneous Forward Voltage @16.0A	V_F	0.55		0.70			V
Maximum D.C. Reverse Current @ $T_c=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_c=100^\circ\text{C}$	I_R	1.0 50					mA mA
Typical Thermal Resistance (Note 1)	$R_{\theta JC}$	1.5					°C/W
Typical Junction Capacitance (Note 2)	C_j	750			500		pF
Operating Junction Temperature Range	T_J	-65 to +125			-65 to +150		°C
Storage Temperature Range	T_{STG}	-65 to +150					°C

Notes: 1. Thermal Resistance from Junction to Case Per Leg
2. Measured at 1MHz and Applied Reverse Voltage of 4.0V D.C.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

RATINGS AND CHARACTERISTIC CURVES (SRA1620 THRU SRA1660)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

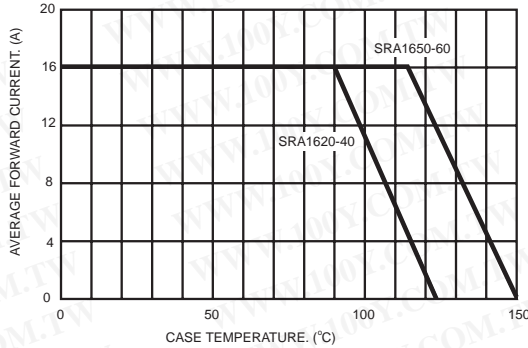


FIG.2- TYPICAL REVERSE CHARACTERISTICS

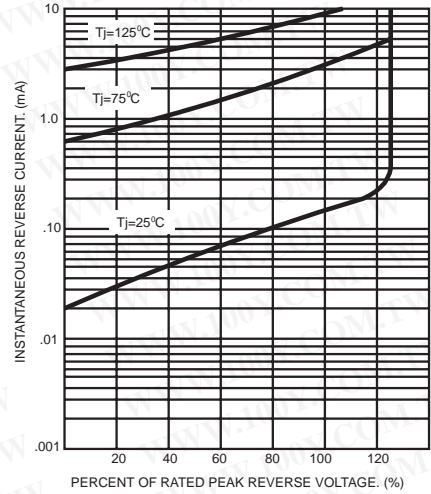


FIG.3- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

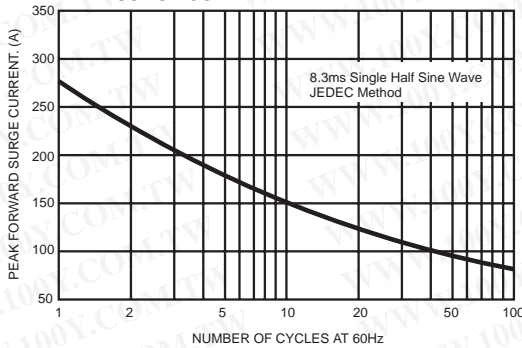


FIG.5- TYPICAL FORWARD CHARACTERISTICS


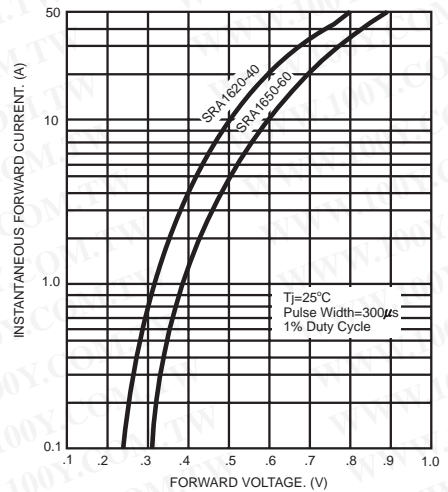


FIG.4- TYPICAL JUNCTION CAPACITANCE

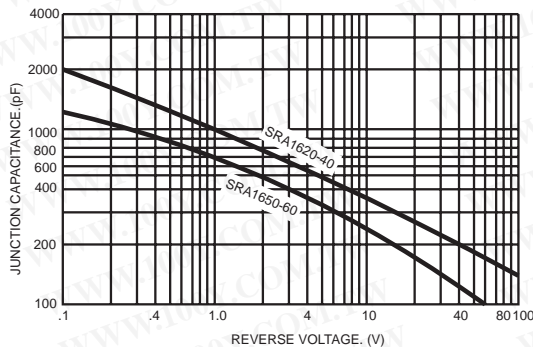

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)