



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

Single Phase Bridge (Power Modules), 25/35 A



MB

FEATURES

- Universal, 3 way terminals:
Push-on, wrap around or solder
- High thermal conductivity package, electrically insulated case
- Center hole fixing
- Excellent power/volume ratio
- UL E300359 approved
- Nickel plated terminals solderable using lead (Pb)-free solder; Solder Alloy Sn/Ag/Cu (SAC305); Solder temperature 260 to 275 °C
- RoHS compliant
- Designed and qualified for industrial level



RoHS
COMPLIANT

PRODUCT SUMMARY

| | |
|-------------|---------|
| $I_{T(AV)}$ | 25/35 A |
|-------------|---------|

DESCRIPTION

A range of extremely compact, encapsulated single phase bridge rectifiers offering efficient and reliable operation. They are intended for use in general purpose and instrumentation applications.

MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL | CHARACTERISTICS | 26MB-A | 36MB-A | UNITS |
|-----------|-----------------|-------------|--------|------------------|
| I_o | | 25 | 35 | A |
| | T_c | 65 | 60 | °C |
| I_{FSM} | 50 Hz | 400 | 475 | A |
| | 60 Hz | 420 | 500 | |
| I^2t | 50 Hz | 790 | 1130 | A ² s |
| | 60 Hz | 725 | 1030 | |
| V_{RRM} | Range | 200 to 1200 | | V |
| T_J | | - 55 to 150 | | °C |

ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS

| TYPE NUMBER | VOLTAGE CODE | V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V | V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V | I_{RRM} MAXIMUM AT T_J MAXIMUM |
|--------------------|--------------|--|--|------------------------------------|
| 26MB..A 36MB..A | 20 | 200 | 275 | 2 |
| | 40 | 400 | 500 | |
| | 60 | 600 | 725 | |
| | 80 | 800 | 900 | |
| | 100 | 1000 | 1100 | |
| | 120 | 1200 | 1300 | |

Vishay High Power Products Single Phase Bridge (Power Modules), 25/35 A

| FORWARD CONDUCTION | | | | | | | |
|--|---------------|--|---------------------------|-----------------------------|--------|--------------------|------------------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | 26MB-A | 36MB-A | UNITS | |
| Maximum DC output current at case temperature | I_o | Resistive or inductive load | | 25 | 35 | A | |
| | | Capacitive load | | 20 | 28 | | |
| | | | | 65 | 60 | °C | |
| Maximum peak, one-cycle non-repetitive forward current | I_{FSM} | t = 10 ms | No voltage reapplied | Initial $T_J = T_J$ maximum | 400 | 475 | A |
| | | t = 8.3 ms | | | | | |
| | | t = 10 ms | 100 % V_{RRM} reapplied | | 335 | 400 | |
| | | t = 8.3 ms | | | 350 | 420 | |
| Maximum I^2t for fusing | I^2t | t = 10 ms | No voltage reapplied | | 790 | 1130 | A ² s |
| | | t = 8.3 ms | | | | | |
| | | t = 10 ms | 100 % V_{RRM} reapplied | | 560 | 800 | |
| | | t = 8.3 ms | | | 512 | 730 | |
| Maximum $I^2\sqrt{t}$ for fusing | $I^2\sqrt{t}$ | I^2t for time $t_x = I_2\sqrt{t} \times \sqrt{t_x}$; $0.1 \leq t_x \leq 10$ ms, $V_{RRM} = 0$ V | | 5.6 | 11.3 | kA ² √s | |
| Low level value of threshold voltage | $V_{F(TO)1}$ | $(16.7 \% \times \pi \times I_{F(AV)}) < I < \pi \times I_{F(AV)}$, T_J maximum | | 0.76 | 0.79 | V | |
| High level value of threshold voltage | $V_{F(TO)2}$ | $I > \pi \times I_{F(AV)}$, T_J maximum | | 0.92 | 0.96 | | |
| Low level forward slope resistance | r_{t1} | $(16.7 \% \times \pi \times I_{F(AV)}) < I < \pi \times I_{F(AV)}$, T_J maximum | | 6.8 | 5.8 | mΩ | |
| High level forward slope resistance | r_{t2} | $I > \pi \times I_{F(AV)}$, T_J maximum | | 5.0 | 4.5 | | |
| Maximum forward voltage drop | V_{FM} | $T_J = 25$ °C, $I_{FM} = 40$ A _{pk} (26MB) | | 1.11 | 1.14 | V | |
| | | $T_J = 25$ °C, $I_{FM} = 55$ A _{pk} (36MB) | | | | | |
| Maximum DC reverse current | I_{RRM} | $T_J = 25$ °C, per diode at V_{RRM} | | 10 | | μA | |
| RMS isolation voltage base plate | V_{INS} | f = 50 Hz, t = 1 s | | 2700 | | V | |

| THERMAL AND MECHANICAL SPECIFICATIONS | | | | | | |
|--|----------------|--|--|-------------|--------|-------|
| PARAMETER | SYMBOL | TEST CONDITIONS | | 26MB-A | 36MB-A | UNITS |
| Junction and storage temperature range | T_J, T_{Stg} | | | - 55 to 150 | | °C |
| Maximum thermal resistance junction to case per bridge | R_{thJC} | | | 1.7 | 1.2 | K/W |
| Maximum thermal resistance, case to heatsink | R_{thCS} | Mounting surface, smooth, flat and greased | | 0.2 | | |
| Approximate weight | | | | 20 | | g |
| Mounting torque ± 10 % | | Bridge to heatsink | | 2.0 | | Nm |



Single Phase Bridge Vishay High Power Products
(Power Modules), 25/35 A

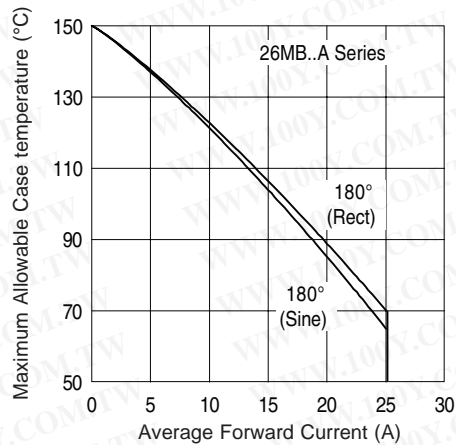


Fig. 1 - Current Ratings Characteristics

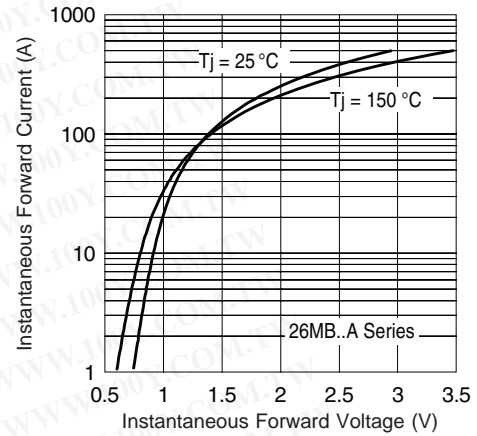


Fig. 2 - Forward Voltage Drop Characteristics
Maximum Allowable Ambient Temperature

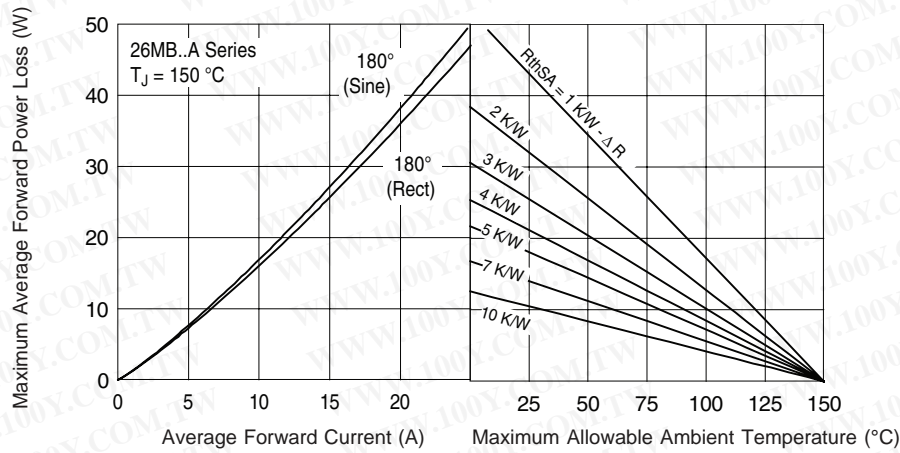


Fig. 3 - Total Power Loss Characteristics

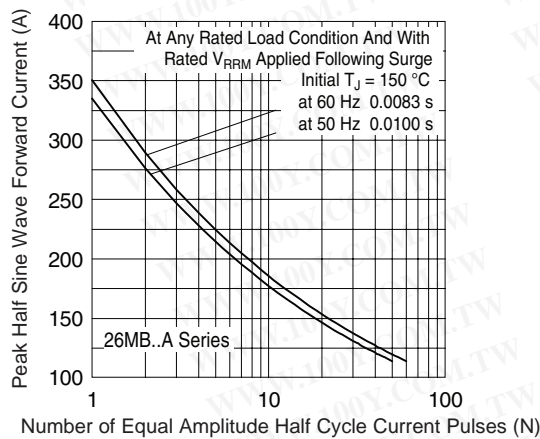


Fig. 4 - Maximum Non-Repetitive Surge Current

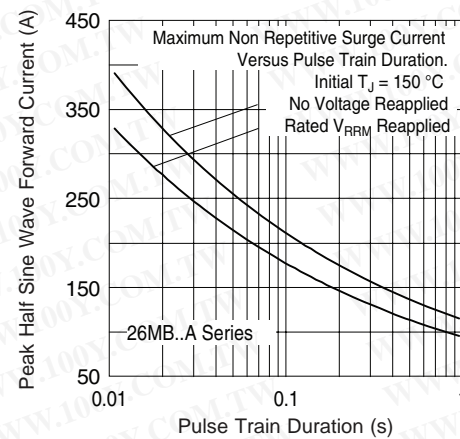


Fig. 5 - Maximum Non-Repetitive Surge Current

Vishay High Power Products Single Phase Bridge
(Power Modules), 25/35 A

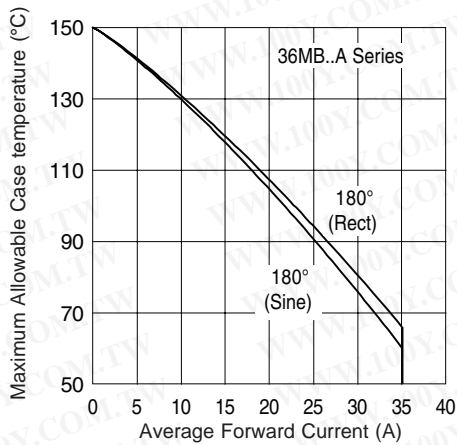


Fig. 6 - Current Ratings Characteristics

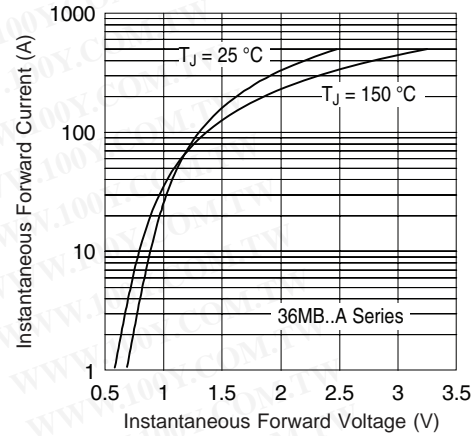


Fig. 7 - Forward Voltage Drop Characteristics

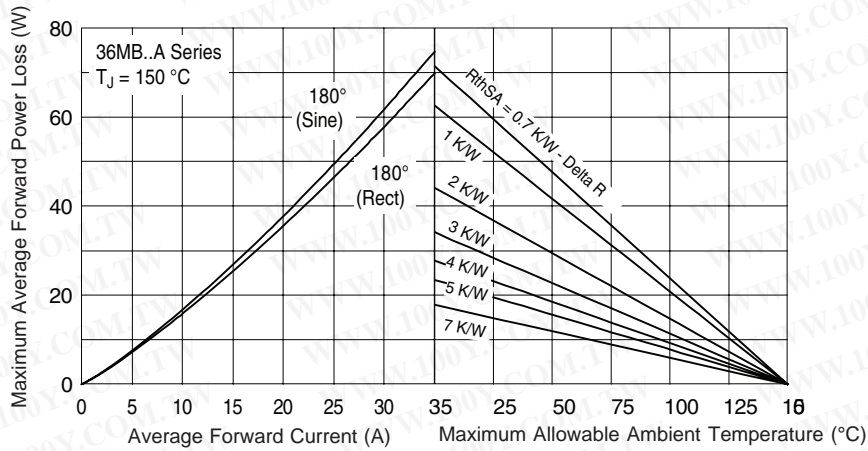


Fig. 8 - Total Power Loss Characteristics

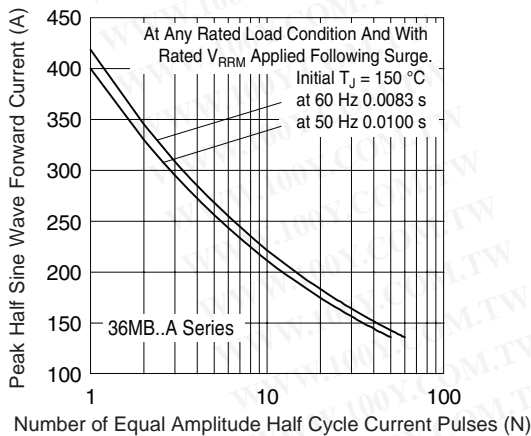


Fig. 9 - Maximum Non-Repetitive Surge Current


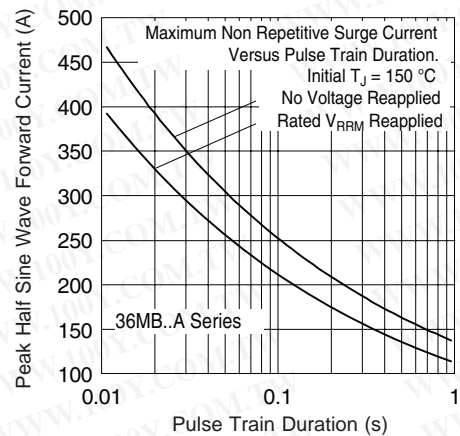


Fig. 10 - Maximum Non-Repetitive Surge Current




ORDERING INFORMATION TABLE

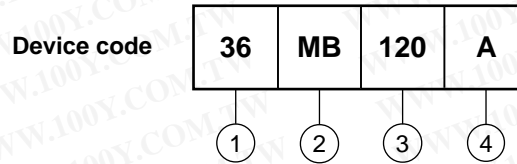

- ① - Current rating code 26 = 25 A (average)
36 = 35 A (average)
- ② - Circuit configuration:
MB = Single phase european coding
- ③ - Voltage code x 10 = V_{RRM}
- ④ - Diode bridge rectifier:
A = 26 MB, 36 MB series

CIRCUIT CONFIGURATION

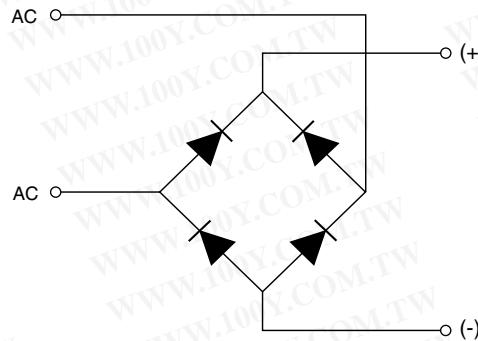

LINKS TO RELATED DOCUMENTS

Dimensions

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)