

P-Channel 150-V (D-S) MOSFET

PRODUCT SUMMARY			
V _{DS} (V)	R _{DS(on)} (Ω)	I _D (A)	Q _g (Typ.)
- 150	1.2 at V _{GS} = - 10 V	- 0.69	7.7
	1.3 at V _{GS} = - 6.0 V	- 0.66	

FEATURES

- Halogen-free According to IEC 61249-2-21 Available
- TrenchFET® Power MOSFET
- Ultra Low On-Resistance
- Small Size




RoHS
COMPLIANT
HALOGEN
FREE
Available

APPLICATIONS

- Active Clamp Circuits in DC/DC Power Supplies

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



Ordering Information: Si2325DS -T1-E3 (Lead (Pb)-free)
Si2325DS -T1-GE3 (Lead (Pb)-free and Halogen-free)

ABSOLUTE MAXIMUM RATINGS T _A = 25 °C, unless otherwise noted				
Parameter	Symbol	5 s	Steady State	Unit
Drain-Source Voltage	V _{DS}	- 150		V
Gate-Source Voltage	V _{GS}	± 20		
Continuous Drain Current (T _J = 150 °C) ^{a, b}	I _D	T _A = 25 °C	- 0.69	- 0.53
		T _A = 70 °C	- 0.55	- 0.43
Pulsed Drain Current	I _{DM}	- 1.6		A
Continuous Source Current (Diode Conduction) ^{a, b}	I _S	- 1.0	- 0.6	
Single Pulse Avalanche Current	I _{AS}	4.5		mJ
Single Pulse Avalanche Energy		E _{AS}	1.01	
Maximum Power Dissipation ^{a, b}	P _D	T _A = 25 °C	1.25	0.75
		T _A = 70 °C	0.8	0.48
Operating Junction and Storage Temperature Range	T _J , T _{stg}	- 55 to 150		°C

THERMAL RESISTANCE RATINGS				
Parameter	Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient ^a	R _{thJA}	t ≤ 5 s	75	100
		Steady State	120	166
Maximum Junction-to-Foot (Drain)	R _{thJF}	40	50	°C/W

Notes:

a. Surface Mounted on 1" x 1" FR4 board.

b. Pulse width limited by maximum junction temperature.

SPECIFICATIONS $T_J = 25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
Static						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = -250\ \mu\text{A}$	- 150			V
Gate-Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\ \mu\text{A}$	- 2.5		- 4.5	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -150\text{ V}, V_{GS} = 0\text{ V}$			- 1	μA
		$V_{DS} = -150\text{ V}, V_{GS} = 0\text{ V}, T_J = 55^\circ\text{C}$			- 10	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \leq -15\text{ V}, V_{GS} = 10\text{ V}$	- 1.6			A
Drain-Source On-Resistance ^a	$R_{DS(on)}$	$V_{GS} = -10\text{ V}, I_D = -0.5\text{ A}$		1.0	1.2	Ω
		$V_{GS} = -6.0\text{ V}, I_D = -0.5\text{ A}$		1.05	1.3	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -15\text{ V}, I_D = -0.5\text{ A}$		2.2		S
Diode Forward Voltage	V_{SD}	$I_S = -1.0\text{ A}, V_{GS} = 0\text{ V}$		0.7	- 1.2	V
Dynamic^b						
Total Gate Charge	Q_g	$V_{DS} = -75\text{ V}, V_{GS} = 10\text{ V},$ $I_D \cong -0.5\text{ A}$		7.7	12	nC
Gate-Source Charge	Q_{gs}			1.5		
Gate-Drain Charge	Q_{gd}			2.5		
Gate Resistance	R_g	$f = 1.0\text{ MHz}$		9		Ω
Input Capacitance	C_{iss}	$V_{DS} = -25\text{ V}, V_{GS} = 0\text{ V}, f = 1\text{ MHz}$		340	510	pF
Output Capacitance	C_{oss}			30		
Reverse Transfer Capacitance	C_{rss}			16		
Switching^c						
Turn-On Time	$t_{d(on)}$	$V_{DD} = -75\text{ V}, R_L = 75\ \Omega$ $I_D \cong -1.0\text{ A}, V_{GEN} = -10\text{ V}$ $R_g = 6\ \Omega$		7	11	ns
	t_r			11	17	
Turn-Off Time	$t_{d(off)}$			16	25	
	t_f			11	17	
Body Diode Reverse Recovery Charge	Q_{rr}	$I_F = 0.5\text{ A}, di/dt = 100\text{ A}/\mu\text{s}$		90	135	nC

Notes:

- a. Pulse test: $PW \leq 300\ \mu\text{s}$ duty cycle $\leq 2\%$.
 b. For DESIGN AID ONLY, not subject to production testing.
 c. Switching time is essentially independent of operating temperature.







Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Si2325DS
Vishay Siliconix

TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

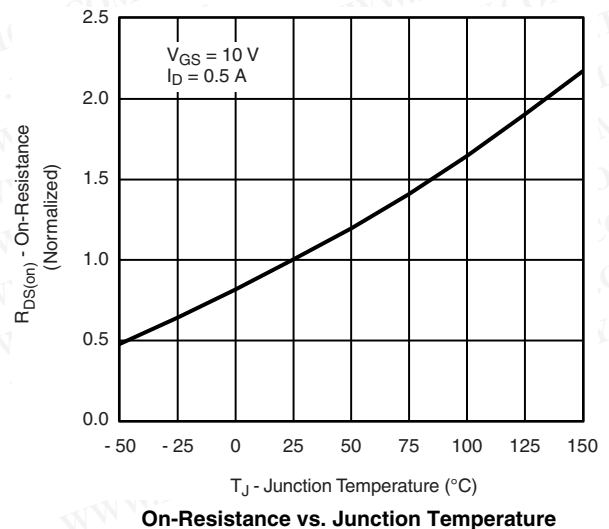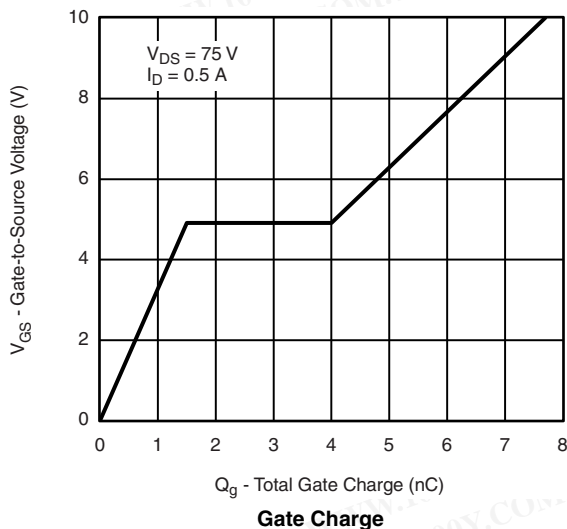
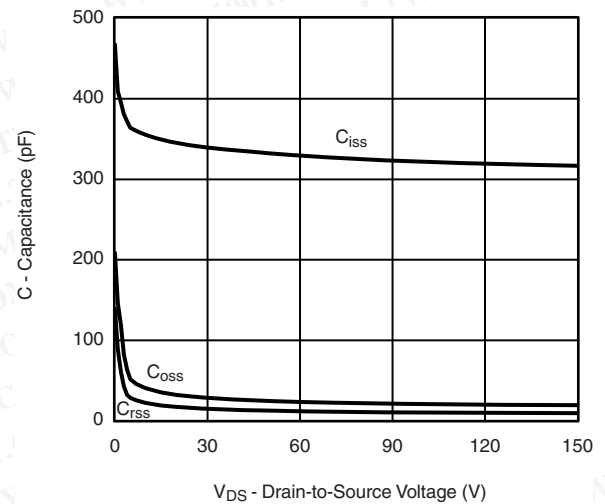
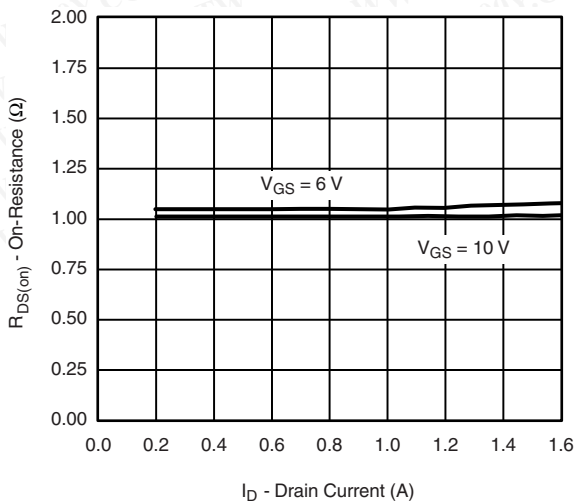
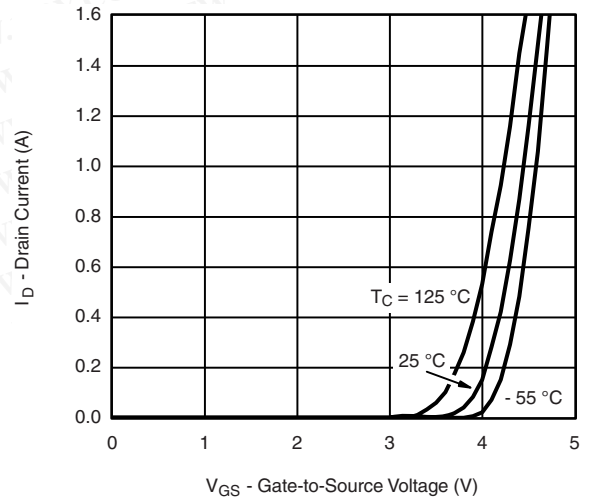
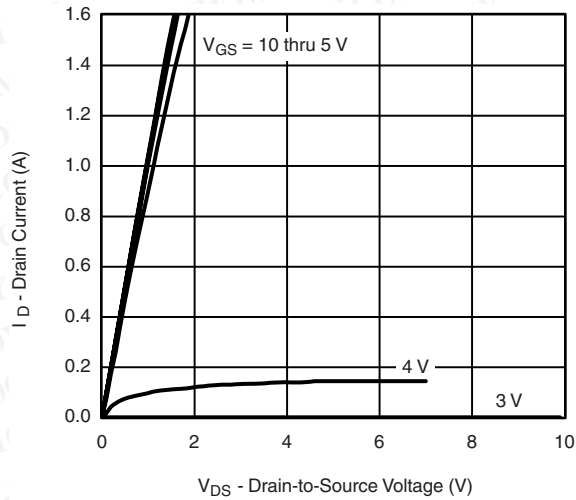




Si2325DS

Vishay Siliconix


TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

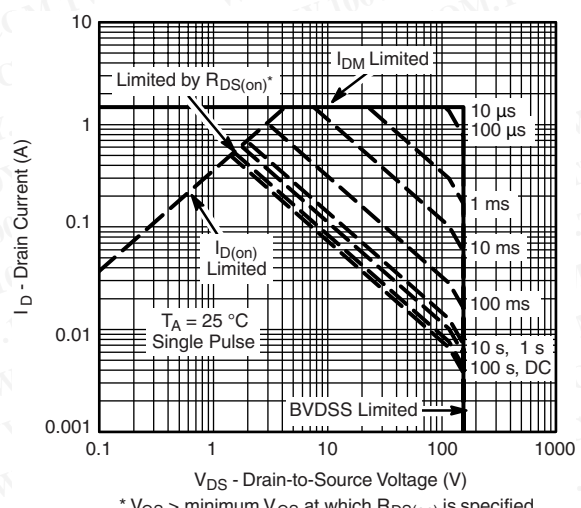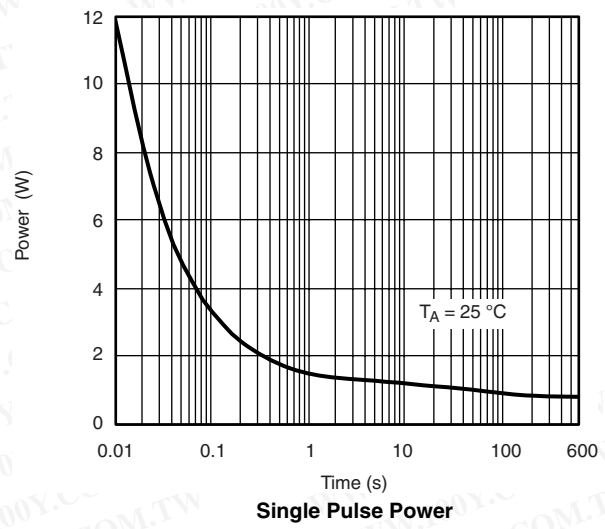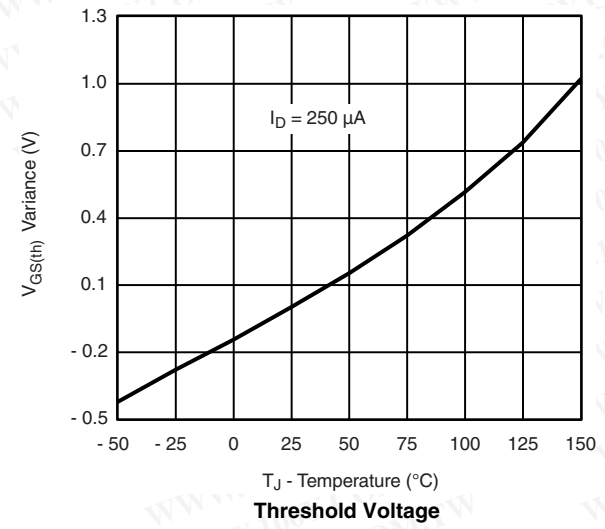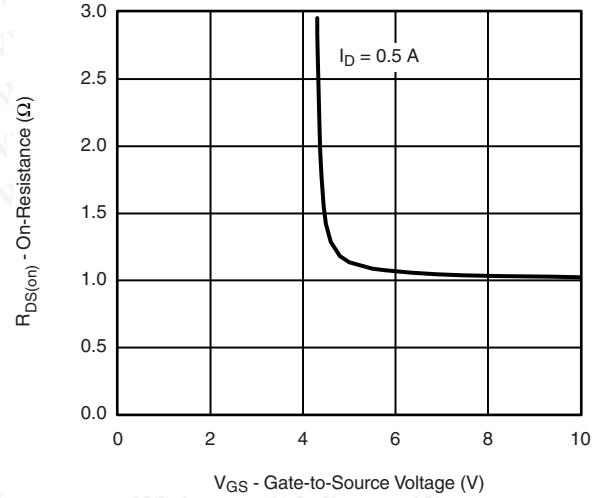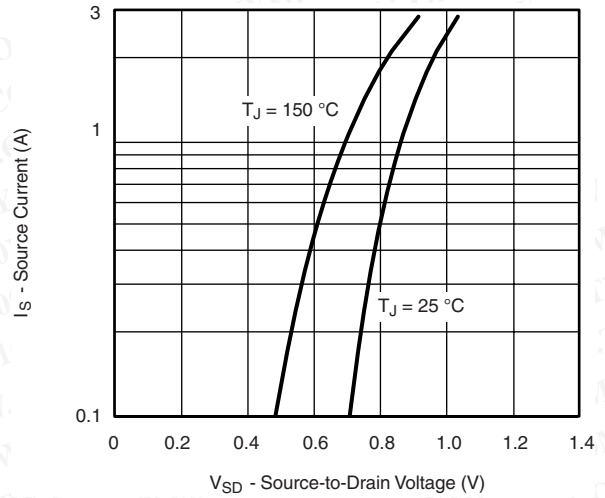

* $V_{GS} >$ minimum V_{GS} at which $R_{DS(on)}$ is specified



TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

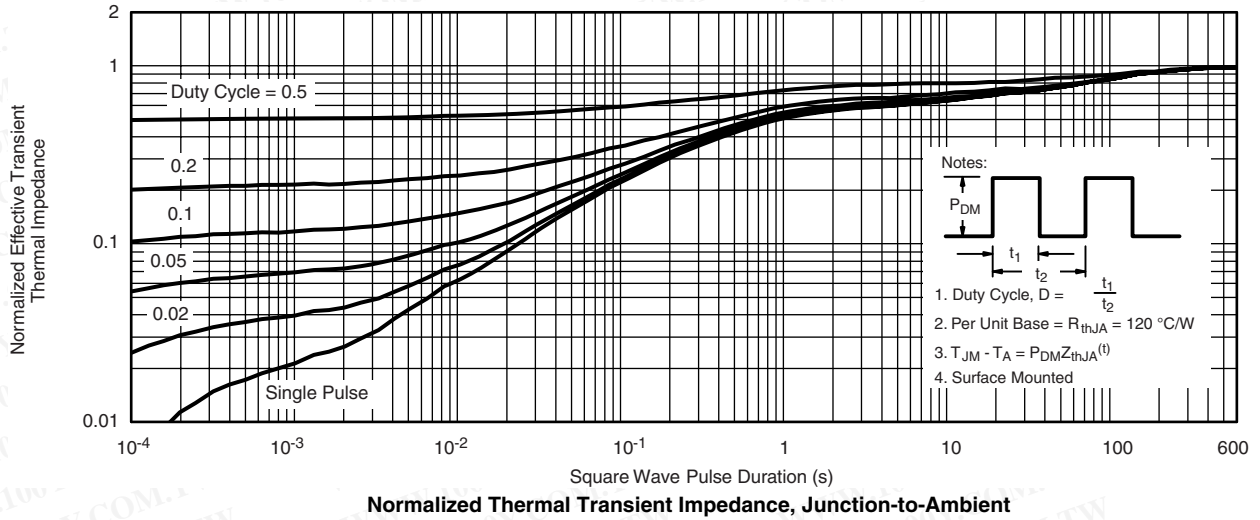

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg273238.



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Legal Disclaimer Notice

Vishay

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.