

2SB1079


Silicon PNP Triple Diffused

HITACHI

Application

Low frequency power amplifier complementary pair with 2SD1559

Outline

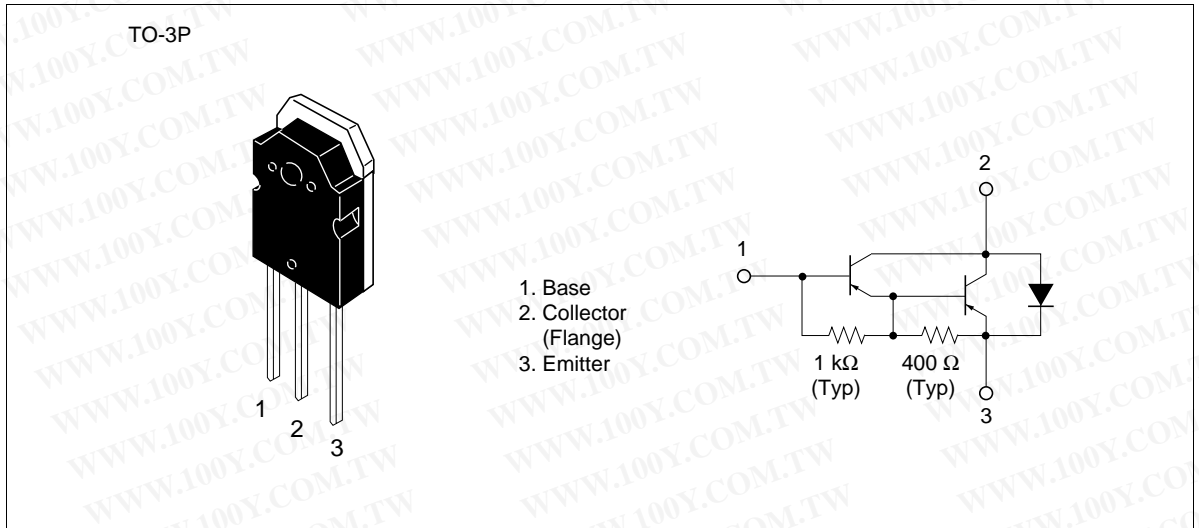

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	-100	V
Collector to emitter voltage	V_{CEO}	-100	V
Emitter to base voltage	V_{EBO}	-7	V
Collector current	I_C	-20	A
Collector peak current	$I_{C(peak)}$	-30	A
Base current	I_B	-3	A
Collector power dissipation	P_C^{*1}	100	W
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 to +150	°C


Note: 1. Value at $T_C = 25^\circ\text{C}$.

Electrical Characteristics (Ta = 25°C)


Item	Symbol	Min	Typ	Max	Unit	Test conditions
Collector to base breakdown voltage	$V_{(BR)CBO}$	-100	—	—	V	$I_C = -0.1 \text{ mA}, I_E = 0$
Collector to emitter breakdown voltage	$V_{(BR)CEO}$	-100	—	—	V	$I_C = -25 \text{ mA}, R_{BE} = \infty$
Collector to emitter sustain voltage	$V_{CEO(sus)}$	-100	—	—	V	$I_C = -200 \text{ mA}, R_{BE} = \infty^{*1}$
Emitter to base breakdown voltage	$V_{(BR)EBO}$	-7	—	—	V	$I_E = -50 \text{ mA}, I_C = 0$
Collector cutoff current	I_{CBO}	—	—	-100	μA	$V_{CB} = -100 \text{ V}, I_E = 0$
	I_{CEO}	—	—	-1.0	mA	$V_{CE} = -80 \text{ V}, R_{BE} = \infty$
DC current transfer ratio	h_{FE}	1000	—	20000		$V_{CE} = -3 \text{ V}, I_C = -10 \text{ A}^{*1}$
Collector to emitter saturation voltage	$V_{CE(sat)1}$	—	—	-2.0	V	$I_C = -10 \text{ A}, I_B = -20 \text{ mA}^{*1}$
Base to emitter saturation voltage	$V_{BE(sat)1}$	—	—	-2.5	V	
Collector to emitter saturation voltage	$V_{CE(sat)2}$	—	—	-3.0	V	$I_C = -20 \text{ A}, I_B = -200 \text{ mA}^{*1}$
Base to emitter saturation voltage	$V_{BE(sat)2}$	—	—	-3.5	V	
Turn on time	t_{on}	—	0.6	—	μs	$I_C = -10 \text{ A}, I_{B1} = -I_{B2} = -20 \text{ mA}$
Storage time	t_{stg}	—	3.5	—	μs	

Note: 1. Pulse Test.


Maximum Collector Dissipation Curve

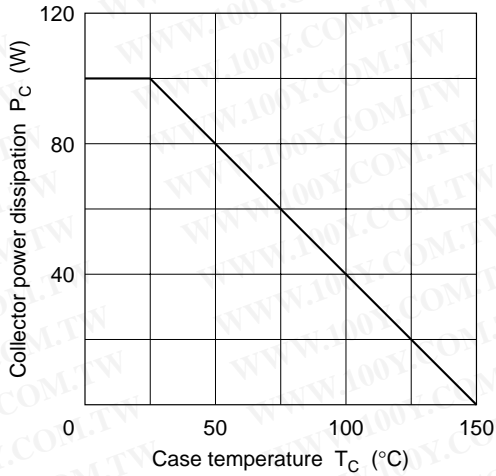


Area of Safe Operation

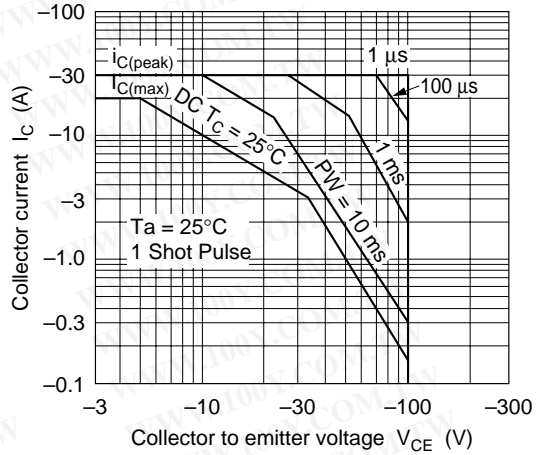


Typical Output Characteristics

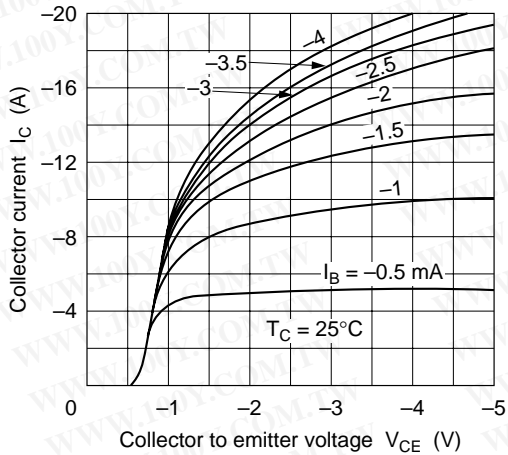


DC Current Transfer Ratio vs. Collector Current

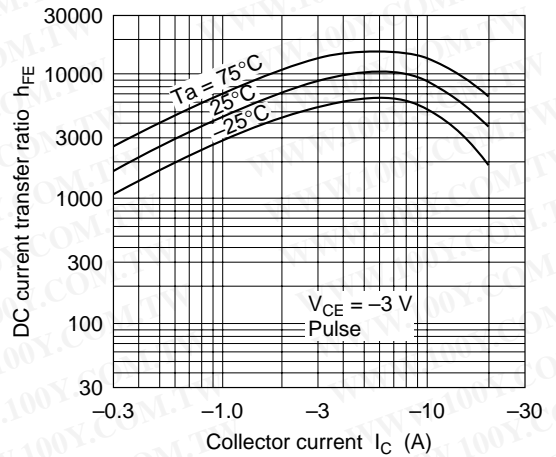


Saturation Voltage vs. Collector Current


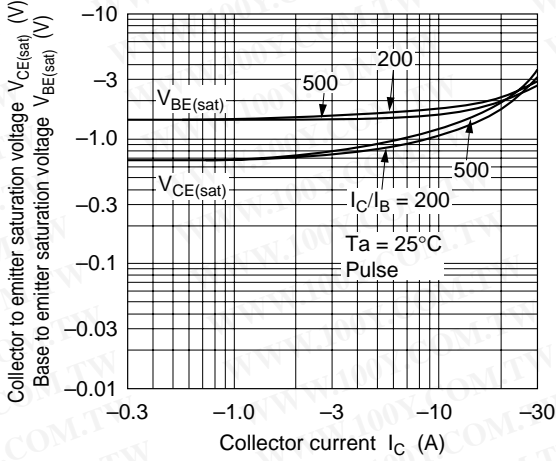


Switching Time vs. Collector Current

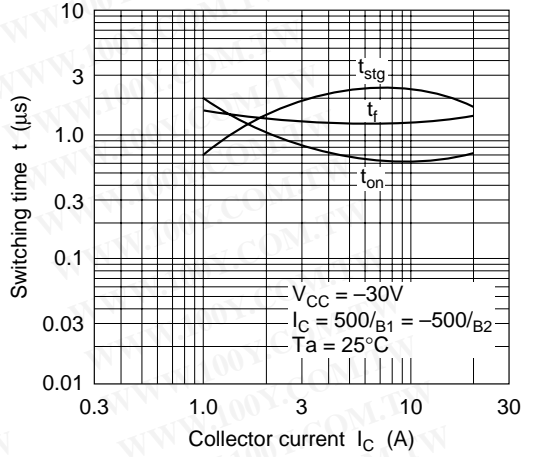

Transient Thermal Resistance

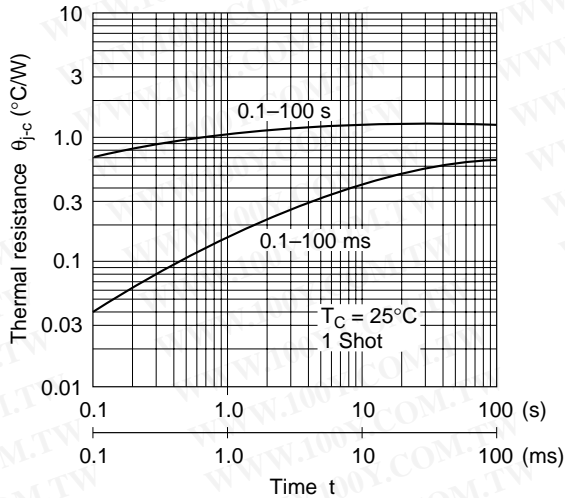

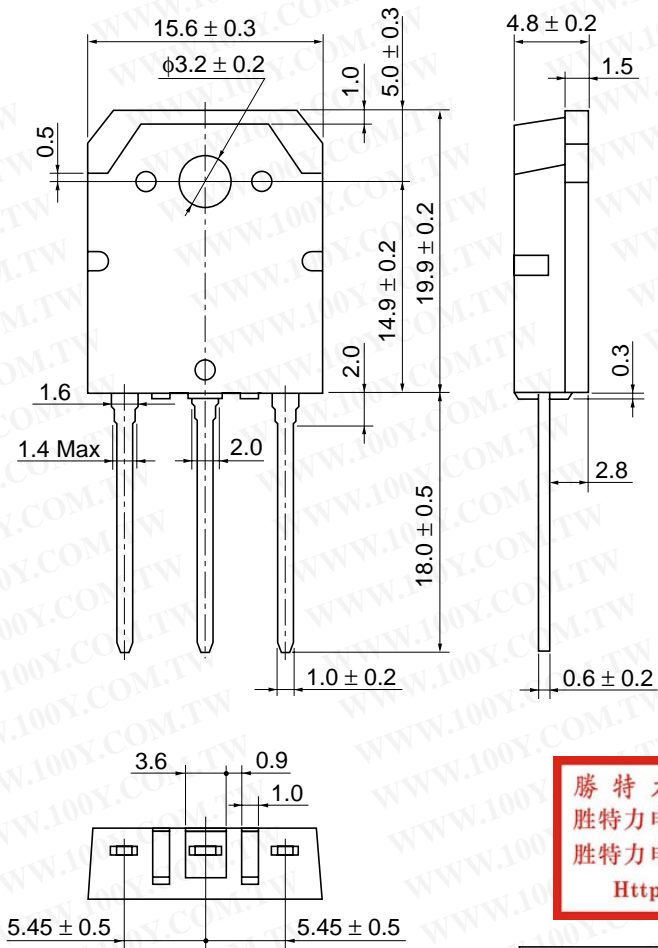

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Hitachi Code	TO-3P
JEDEC	—
EIAJ	Conforms
Weight (reference value)	5.0 g