

PDP SWITCH


IRFI4227PbF

Features

- Advanced Process Technology
- Key Parameters Optimized for PDP Sustain, Energy Recovery and Pass Switch Applications
- Low E_{PULSE} Rating to Reduce Power Dissipation in PDP Sustain, Energy Recovery and Pass Switch Applications
- Low Q_G for Fast Response
- High Repetitive Peak Current Capability for Reliable Operation
- Short Fall & Rise Times for Fast Switching
- 150°C Operating Junction Temperature for Improved Ruggedness
- Repetitive Avalanche Capability for Robustness and Reliability

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Key Parameters		
V_{DS} max	200	V
V_{DS} (Avalanche) typ.	240	V
$R_{DS(ON)}$ typ. @ 10V	21	$m\Omega$
I_{RP} max @ $T_C = 100^\circ C$	47	A
T_J max	150	$^\circ C$

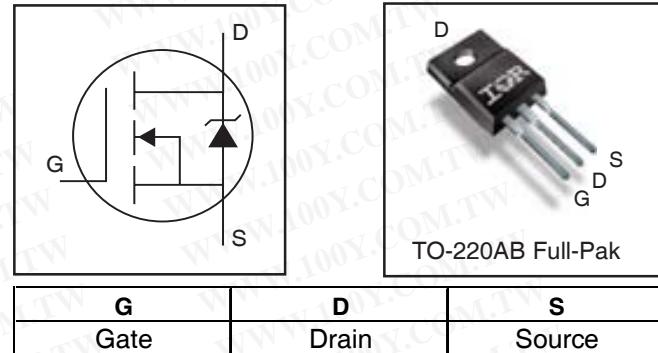

Description

This HEXFET® Power MOSFET is specifically designed for Sustain; Energy Recovery & Pass switch applications in Plasma Display Panels. This MOSFET utilizes the latest processing techniques to achieve low on-resistance per silicon area and low E_{PULSE} rating. Additional features of this MOSFET are 150°C operating junction temperature and high repetitive peak current capability. These features combine to make this MOSFET a highly efficient, robust and reliable device for PDP driving applications.

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{GS}	Gate-to-Source Voltage	± 30	V
I_D @ $T_C = 25^\circ C$	Continuous Drain Current, V_{GS} @ 10V	26	A
I_D @ $T_C = 100^\circ C$	Continuous Drain Current, V_{GS} @ 10V	17	
I_{DM}	Pulsed Drain Current ①	100	
I_{RP} @ $T_C = 100^\circ C$	Repetitive Peak Current ⑤	47	
P_D @ $T_C = 25^\circ C$	Power Dissipation	46	W
P_D @ $T_C = 100^\circ C$	Power Dissipation	18	
	Linear Derating Factor	0.37	W/ $^\circ C$
T_J	Operating Junction and Storage Temperature Range	-40 to + 150	$^\circ C$
T_{STG}	Soldering Temperature for 10 seconds	300	
	Mounting Torque, 6-32 or M3 Screw	10lb·in (1.1N·m)	N

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case ④	—	2.73	
$R_{\theta JA}$	Junction-to-Ambient ④	—	65	

Notes ① through ⑤ are on page 8

Electrical Characteristics @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	200	—	—	V	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	240	—	mV/ $^\circ\text{C}$	Reference to $25^\circ\text{C}, I_D = 1\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	—	21	25	$\text{m}\Omega$	$V_{\text{GS}} = 10\text{V}, I_D = 17\text{A}$ ③
$V_{\text{GS(th)}}$	Gate Threshold Voltage	3.0	—	5.0	V	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$
$\Delta V_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	11	—	mV/ $^\circ\text{C}$	
I_{DSS}	Drain-to-Source Leakage Current	—	—	20	μA	$V_{\text{DS}} = 200\text{V}, V_{\text{GS}} = 0\text{V}$
		—	—	1.0	mA	$V_{\text{DS}} = 200\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	—	—	-100	nA	$V_{\text{GS}} = -20\text{V}$
g_{fs}	Forward Transconductance	47	—	—	S	$V_{\text{DS}} = 25\text{V}, I_D = 17\text{A}$
Q_g	Total Gate Charge	—	73	110	nC	$V_{\text{DD}} = 100\text{V}, I_D = 17\text{A}, V_{\text{GS}} = 10\text{V}$ ③
Q_{gd}	Gate-to-Drain Charge	—	21	—		
$t_{\text{d(on)}}$	Turn-On Delay Time	—	17	—		$V_{\text{DD}} = 100\text{V}, V_{\text{GS}} = 10\text{V}$ ③
t_r	Rise Time	—	19	—	ns	$I_D = 17\text{A}$
$t_{\text{d(off)}}$	Turn-Off Delay Time	—	11	—		$R_G = 2.5\Omega$
t_f	Fall Time	—	29	—		See Fig. 22
t_{st}	Shoot Through Blocking Time	100	—	—	ns	$V_{\text{DD}} = 160\text{V}, V_{\text{GS}} = 15\text{V}, R_G = 4.7\Omega$
E_{PULSE}	Energy per Pulse	—	570	—	μJ	$L = 220\text{nH}, C = 0.4\mu\text{F}, V_{\text{GS}} = 15\text{V}$
		—	910	—		$V_{\text{DS}} = 160\text{V}, R_G = 4.7\Omega, T_J = 25^\circ\text{C}$
		—	—			$L = 220\text{nH}, C = 0.4\mu\text{F}, V_{\text{GS}} = 15\text{V}$
C_{iss}	Input Capacitance	—	4600	—	pF	$V_{\text{GS}} = 0\text{V}$
		—	460	—		$V_{\text{DS}} = 25\text{V}$
		—	91	—		$f = 1.0\text{MHz},$
C_{oss}	Output Capacitance	—	360	—		$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 0\text{V to } 160\text{V}$
C_{rss}	Reverse Transfer Capacitance	—	—			
$C_{\text{oss eff.}}$	Effective Output Capacitance	—	—			
L_D	Internal Drain Inductance	—	4.5	—	nH	Between lead, 6mm (0.25in.)
L_S	Internal Source Inductance	—	7.5	—		from package and center of die contact

Avalanche Characteristics

	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy ②	—	54	mJ
E_{AR}	Repetitive Avalanche Energy ①	—	4.6	mJ
$V_{\text{DS(Avalanche)}}$	Repetitive Avalanche Voltage ①	240	—	V
I_{AS}	Avalanche Current ②	—	16	A

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
$I_S @ T_C = 25^\circ\text{C}$	Continuous Source Current (Body Diode)	—	—	26	A	MOSFET symbol showing the integral reverse p-n junction diode.
	Pulsed Source Current (Body Diode) ①	—	—	100		
V_{SD}	Diode Forward Voltage	—	—	1.3	V	$T_J = 25^\circ\text{C}, I_S = 17\text{A}, V_{\text{GS}} = 0\text{V}$ ③
	Reverse Recovery Time	—	93	140	ns	$T_J = 25^\circ\text{C}, I_F = 17\text{A}, V_{\text{DD}} = 50\text{V}$
Q_{rr}	Reverse Recovery Charge	—	350	520	nC	$dI/dt = 100\text{A}/\mu\text{s}$ ③

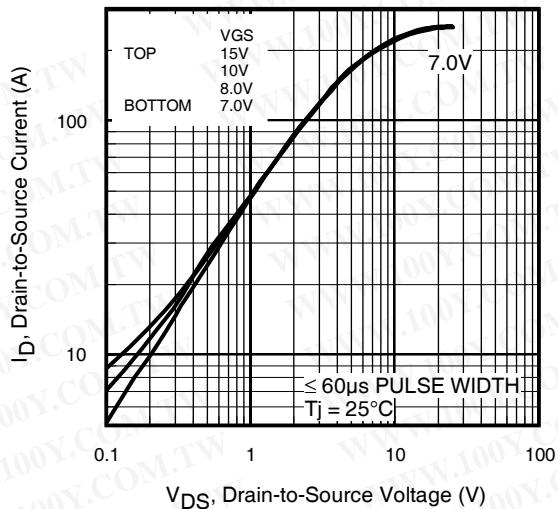


Fig 1. Typical Output Characteristics

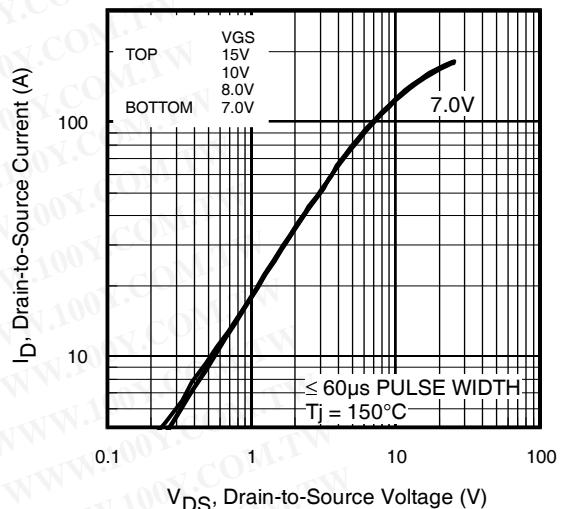


Fig 2. Typical Output Characteristics

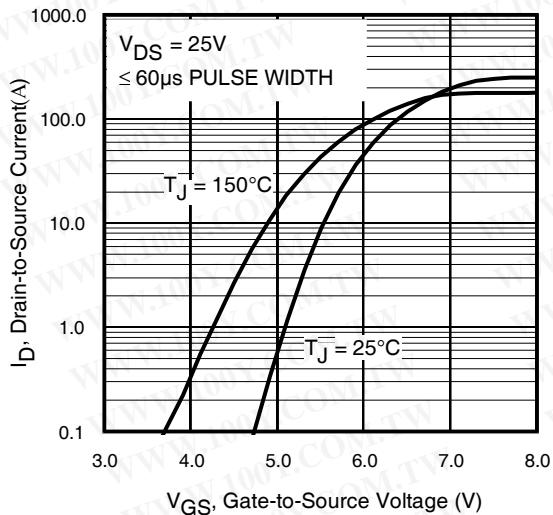


Fig 3. Typical Transfer Characteristics

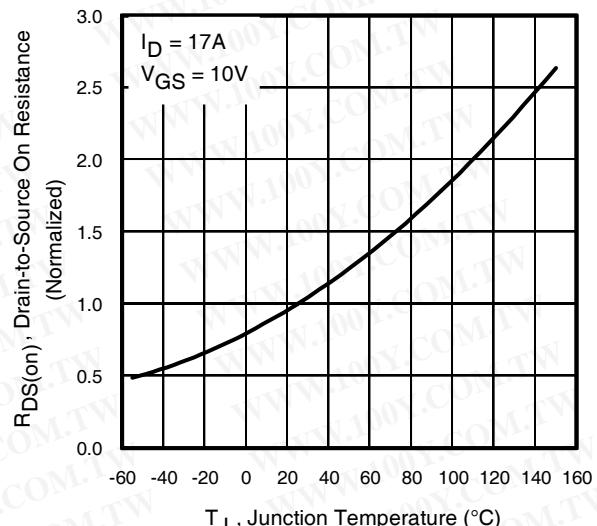


Fig 4. Normalized On-Resistance vs. Temperature

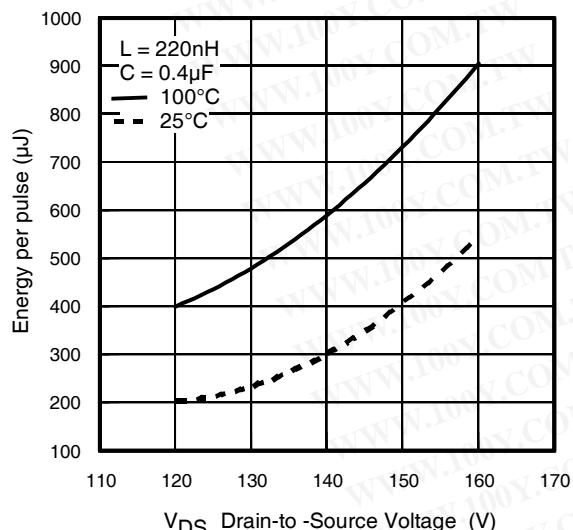


Fig 5. Typical E_{PULSE} vs. Drain-to-Source Voltage

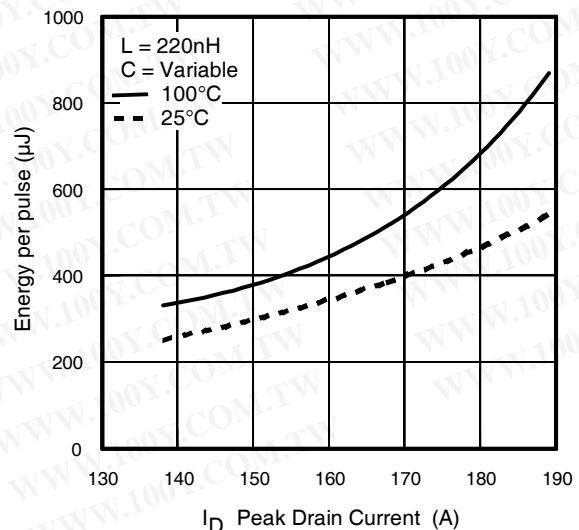


Fig 6. Typical E_{PULSE} vs. Drain Current

IRFI4227PbF

International
Rectifier

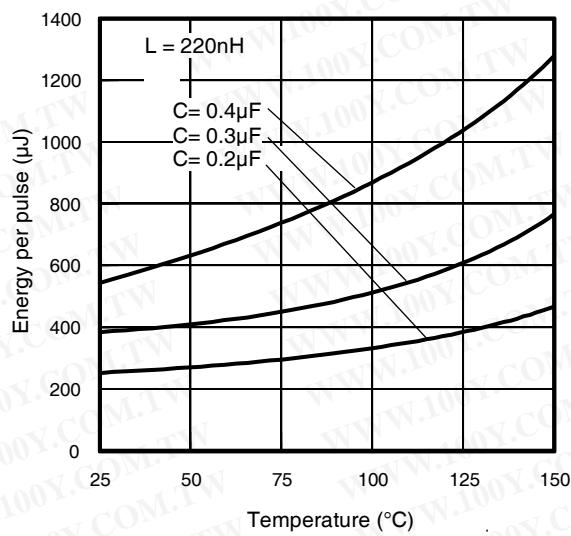


Fig 7. Typical E_{PULSE} vs.Temperature

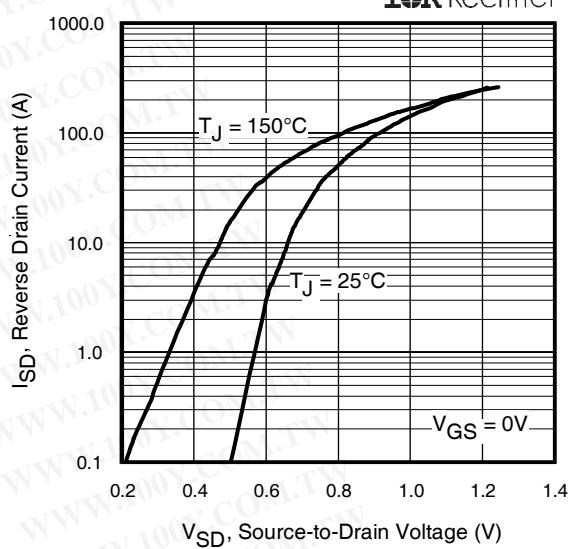


Fig 8. Typical Source-Drain Diode Forward Voltage

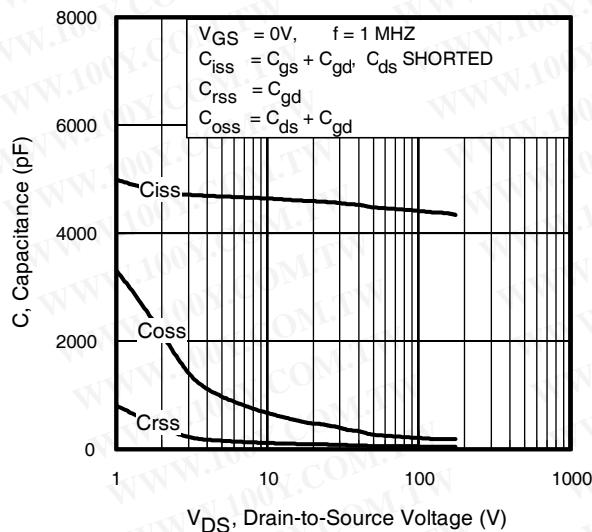


Fig 9. Typical Capacitance vs.Drain-to-Source Voltage

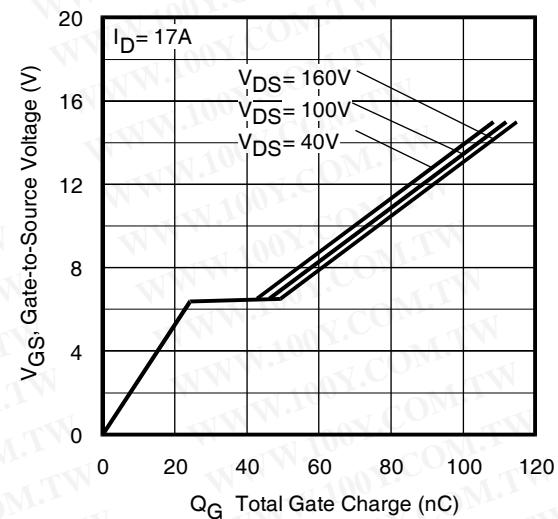


Fig 10. Typical Gate Charge vs.Gate-to-Source Voltage

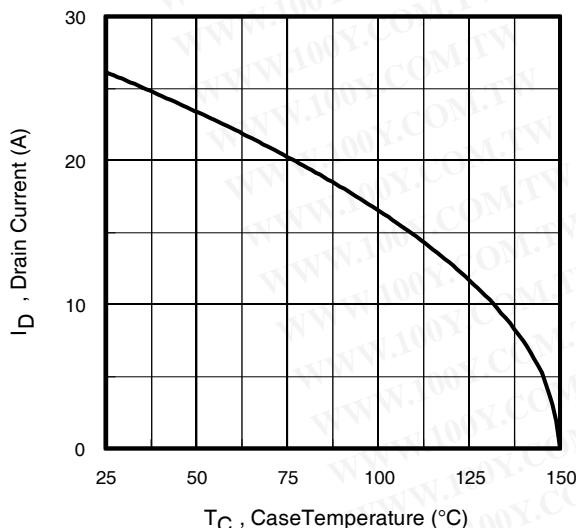


Fig 11. Maximum Drain Current vs. Case Temperature

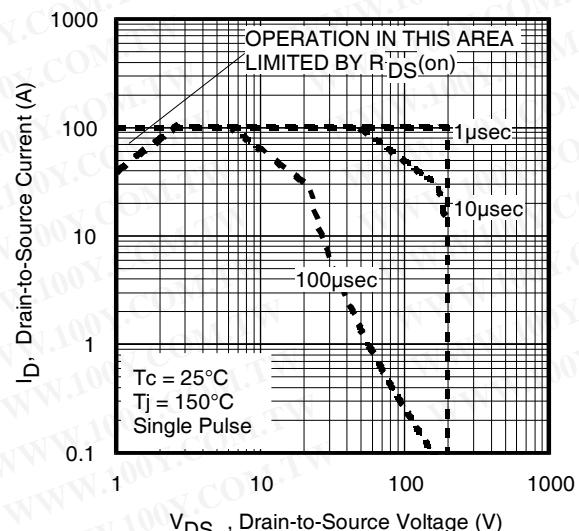


Fig 12. Maximum Safe Operating Area

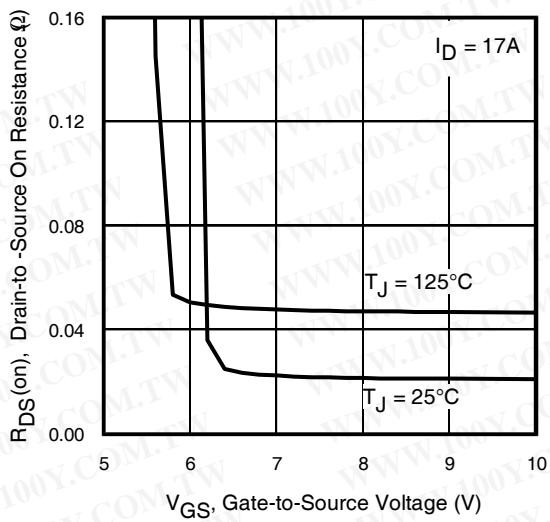


Fig 13. On-Resistance Vs. Gate Voltage

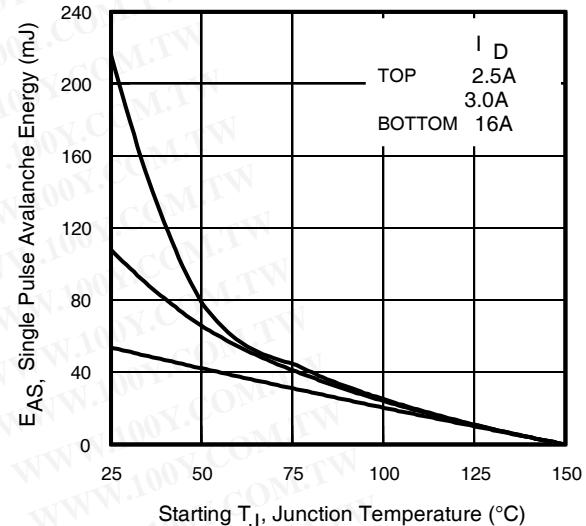


Fig 14. Maximum Avalanche Energy Vs. Temperature

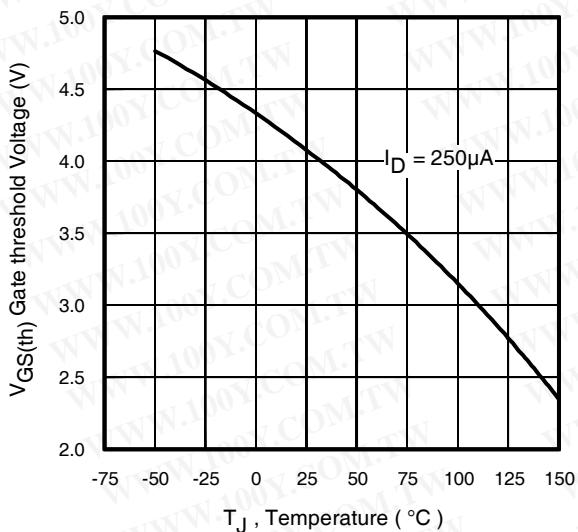


Fig 15. Threshold Voltage vs. Temperature

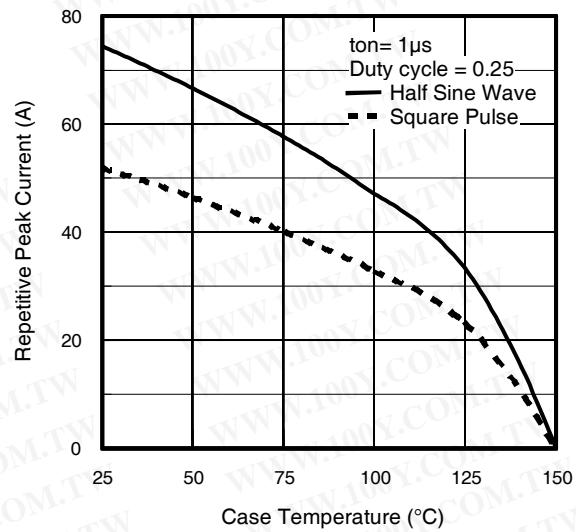


Fig 16. Typical Repetitive peak Current vs. Case temperature

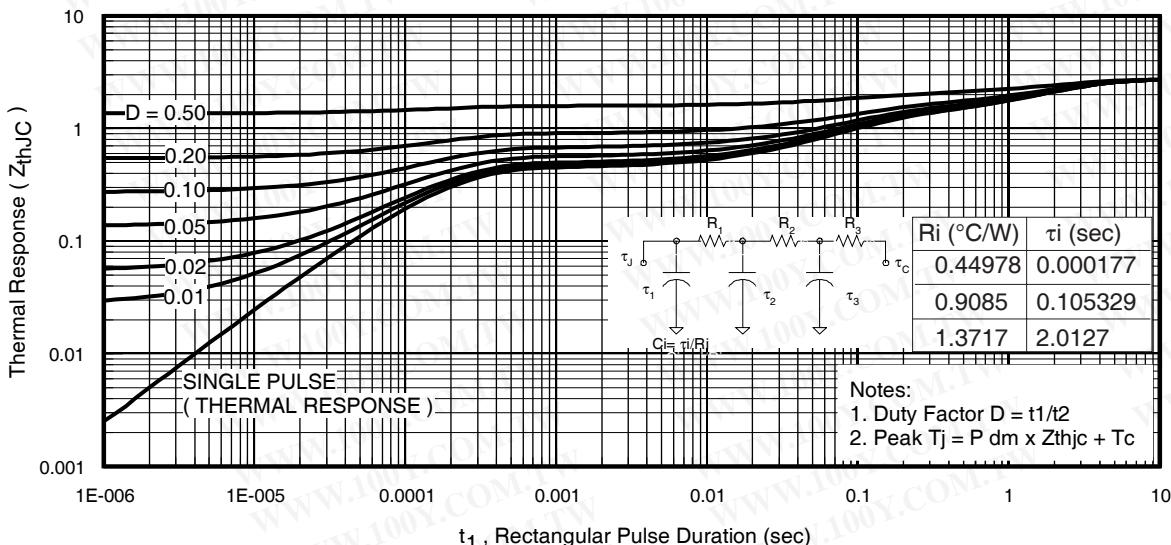


Fig 17. Maximum Effective Transient Thermal Impedance, Junction-to-Case

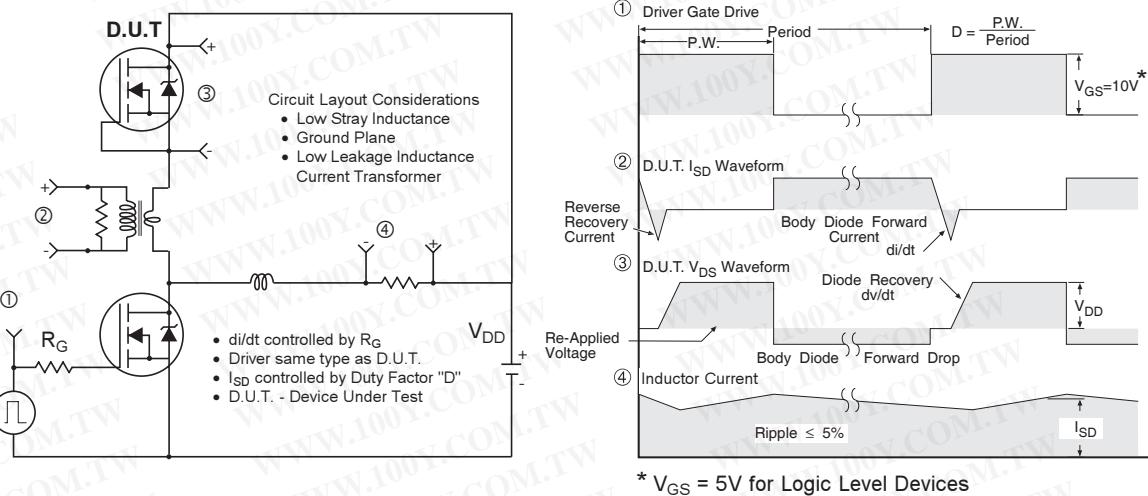


Fig 18. Diode Reverse Recovery Test Circuit for N-Channel HEXFET® Power MOSFETs

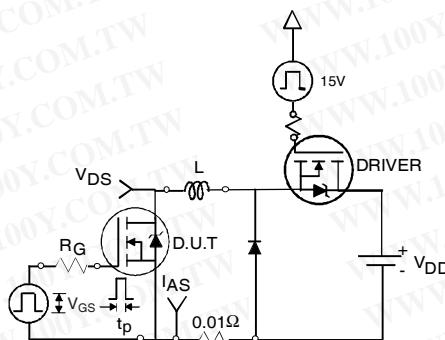


Fig 19a. Unclamped Inductive Test Circuit

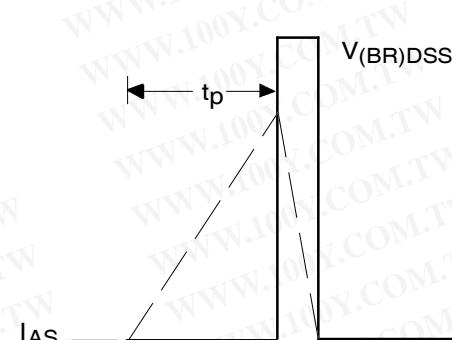


Fig 19b. Unclamped Inductive Waveforms

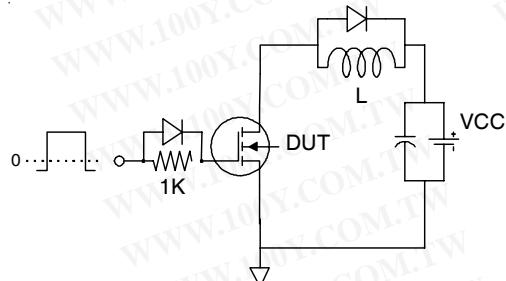


Fig 20a. Gate Charge Test Circuit

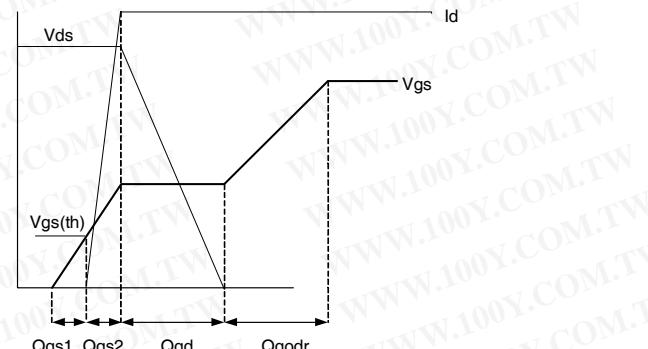


Fig 20b. Gate Charge Waveform

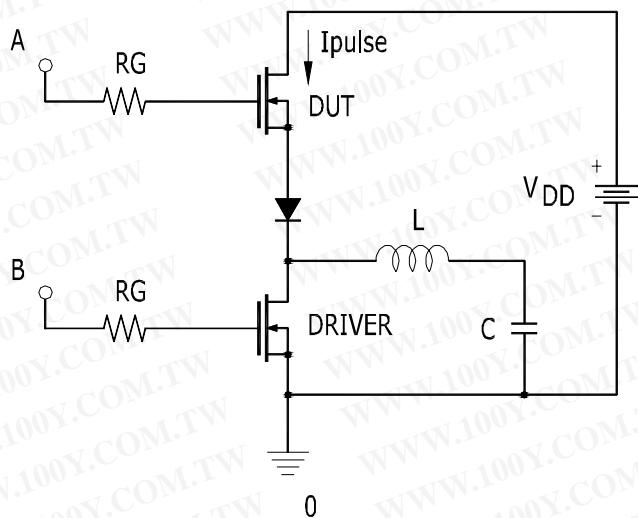


Fig 21a. t_{st} and E_{PULSE} Test Circuit

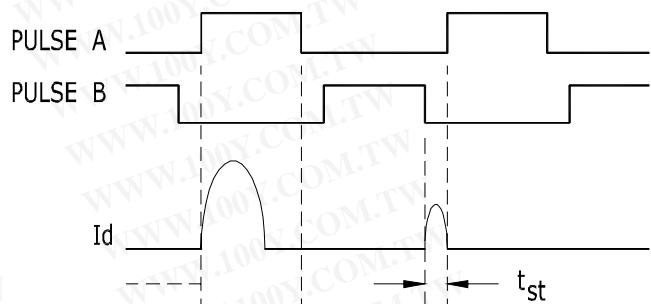


Fig 21b. t_{st} Test Waveforms

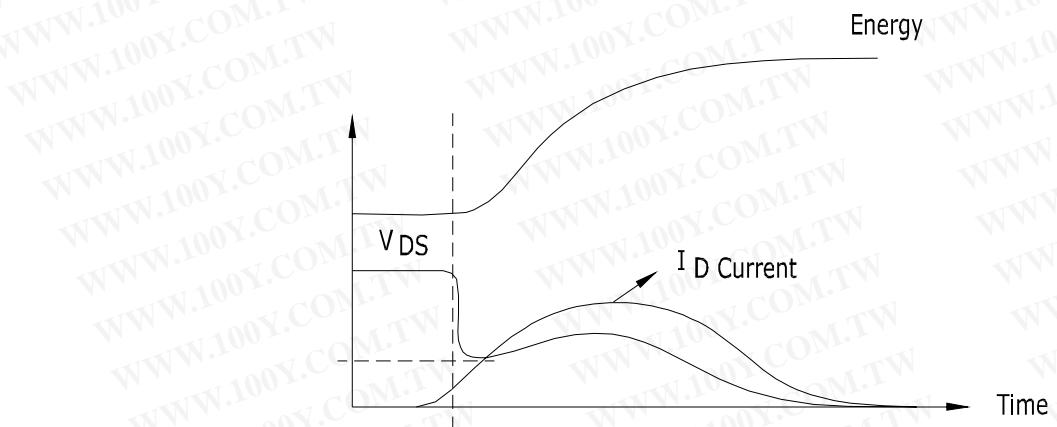


Fig 21c. E_{PULSE} Test Waveforms

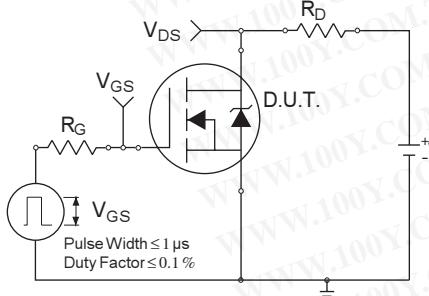


Fig 22a. Switching Time Test Circuit


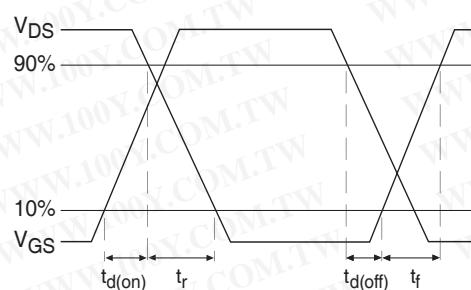


Fig 22b. Switching Time Waveforms

IRFI4227PbF

TO-220AB Full-Pak Package Outline (Dimensions are shown in millimeters (inches))

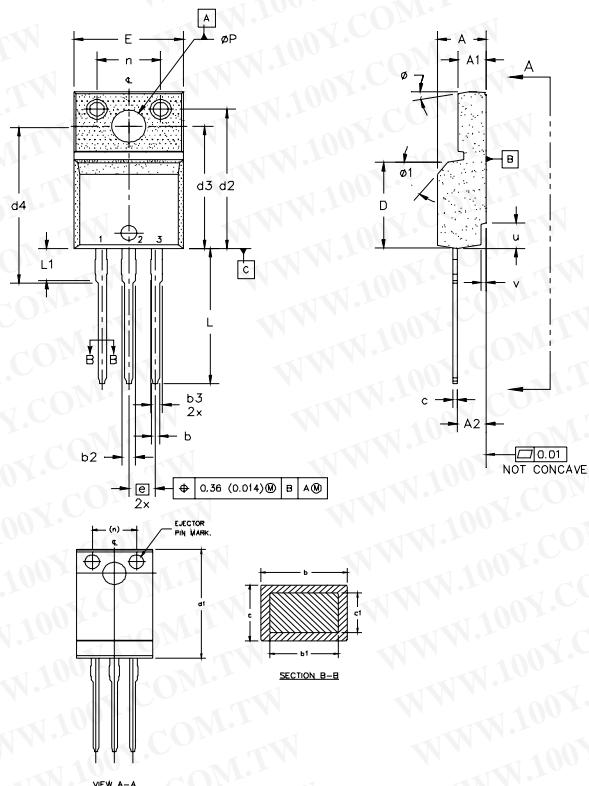

NOTES:

- 1.0 DIMENSIONING AND TOLERANCING PER ASME Y14.5 M- 1994.
- 2.0 DIMENSIONS ARE SHOWN IN MILLIMETERS [INCHES].
- 3.0 LEAD DIMENSION AND FINISH UNCONTROLLED IN L1.
- 4.0 DIMENSION D & E DO NOT INCLUDE MOLD FLASH. MOLD FLASH SHALL NOT EXCEED 0.005" (0.127) PER SIDE. THESE DIMENSIONS ARE MEASURED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY.
- 5.0 DIMENSION b1 APPLY TO BASE METAL ONLY.
- 6.0 STEP OPTIONAL ON PLASTIC BODY DEFINED BY DIMENSIONS u & v.
- 7.0 CONTROLLING DIMENSION : INCHES.

SYMBOL	DIMENSIONS		NOTES	
	MILLIMETERS	INCHES		
	MIN.	MAX.		
A	4.57	4.83	0.180	0.190
A1	2.57	2.83	0.101	0.114
A2	2.51	2.85	0.099	0.112
b	0.622	0.89	0.024	0.035
b1	0.622	0.838	0.024	0.033
b2	1.229	1.400	0.048	0.056
b3	1.229	1.400	0.048	0.056
c	0.440	0.629	0.017	0.025
c1	0.440	0.584	0.017	0.023
D	8.65	9.80	0.341	0.386
d1	15.80	16.12	0.622	0.635
d2	13.97	14.22	0.550	0.560
d3	12.30	12.92	0.484	0.509
d4	8.64	9.91	0.340	0.390
E	10.36	10.63	0.408	0.419
e	2.54	BSC	0.100	BSC
L	13.20	13.73	0.520	0.541
L1	3.10	3.50	0.122	0.138
n	6.05	6.15	0.238	0.242
øP	3.05	3.45	0.120	0.136
u	2.40	2.50	0.094	0.098
v	0.40	0.50	0.016	0.020
ø	3"	7"	3"	7"
ø1		45°		45°

LEAD ASSIGNMENTS

HEXFET

- 1.- GATE
- 2.- DRAIN
- 3.- SOURCE

IGBTs, C-PACK


- 1.- GATE
- 2.- COLLECTOR
- 3.- Emitter

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

TO-220AB Full-Pak Part Marking Information

EXAMPLE: THIS IS AN IRFI840G
WITH ASSEMBLY
LOT CODE 3432
ASSEMBLED ON WW 24, 2001
IN THE ASSEMBLY LINE 'K'

Note: 'P' in assembly line position
indicates 'Lead-Free'

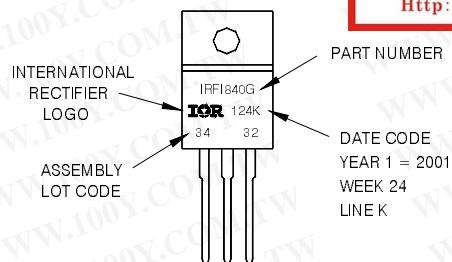

TO-220AB Full-Pak packages are not recommended for Surface Mount Application.

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting $T_J = 25^\circ\text{C}$, $L = 0.44\text{mH}$, $R_G = 25\Omega$, $I_{AS} = 16\text{A}$.
- ③ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
- ④ R_θ is measured at T_J of approximately 90°C .
- ⑤ Half sine wave with duty cycle = 0.25, $t_{on}=1\mu\text{sec}$.

Note: For the most current drawing please refer to IR website at: <http://www.irf.com/package/>

Data and specifications subject to change without notice.
This product has been designed and qualified for the Industrial market.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information. 09/2007

www.irf.com