

**HARRIS**

T-79-05-10

**CA741C, CA741, CA1458,
CA1558, LM741*, LM741C*,
LM1458*, LM1558***

**High-Gain Single and Dual Operational Amplifiers
for Military, Industrial and Commercial Applications**

August 1991

Features:

- Input Bias Current (All Types) 500nA (Max.)
- Input Offset Current (All Types) 200nA (Max.)

Applications

- Comparator
- DC Amplifier
- Integrator or Differentiator
- Multivibrator
- Narrow-Band or Band-Pass Filter
- Summing Amplifier

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

Description

The CA1458, CA1558 (dual types); CA741C, CA741 (single-types); high-gain operational amplifiers for use in military, industrial, and commercial applications.

These monolithic silicon integrated-circuit devices provide output short-circuit protection and latch-free operation. These types also feature wide common-mode and differential-mode signal ranges and have low-offset voltage nulling capability when used with an appropriately valued potentiometer. A 10-kilohm potentiometer is used for offset nulling types CA741C, CA741 (See Fig. 9); and types CA1458, CA1558, have no specific terminals for offset nulling. Each type consists of a differential-input amplifier that effectively drives a gain and level-shifting stage having a complementary emitter-follower output.

The manufacturing process make it possible to produce IC operational amplifiers with low-burst ("popcorn") noise characteristics. The CA741 gives limit specifications for burst noise in the data bulletin, File No. 530. Contact your Sales Representative for information pertinent to other operational amplifier types that meet low-burst noise specifications.

This operational amplifier line also offers the circuit designer the option of operation with internal or external phase compensation.

Unity gain with external phase compensation can be obtained with a single 30-pF capacitor. All the other types are internally phase-compensated.

3
**OPERATIONAL
AMPLIFIERS**

TYPE NO.	NO. OF AMPL.	PHASE COMP.	OFFSET VOLTAGE NULL	MINIMUM AOL	MAXIMUM VIO (mV)	OPERATING TEMPERATURE RANGE (°C)
CA1458	Dual	Int.	No	20k	6	0 to 70 [▲]
CA1558	Dual	Int.	No	50k	5	-55 to 125
CA741C	Single	Int.	Yes	20k	6	0 to 70 [▲]
CA741	Single	Int.	Yes	50k	5	-55 to +125

[▲] All types in any package style can be operated over the temperature range of -55 to +125°C, although the published limits for certain electrical specifications apply only over the temperature range of 0 to +70°C.

* Technical Data on LM Branded types is identical to the corresponding CA Branded types.
 CAUTION: These devices are sensitive to electrostatic discharge. Proper I.C. handling procedures should be followed.
 Copyright © Harris Corporation 1991

File Number **531.1**

CA741C, CA741, CA1458, CA1558, LM741, LM741C, LM1458, LM1558**Ordering Information****T-79-05-10**

When ordering any of these types, it is important that the appropriate suffix letter for the package required be affixed to the type number. For example: If a CA1458 in a straight-lead TO-5 style package is desired, order CA1458T.

TYPE NO.	PACKAGE TYPE AND SUFFIX LETTER							FIG. NO
	TO-5 STYLE			PLASTIC		CHIP	BEAM LEAD	
	8L	10L	DIL-CAN	8L	14L			
CA1458	T	-	S	E	-	H	-	1b, 1d
CA1558	T	-	S	E	-	-	-	1b, 1d
CA741C	T	-	S	E	-	H	-	1a, 1c
CA741	T	-	S	E	-	-	L	1a, 1c

Absolute Maximum Ratings $T_A = +25^\circ\text{C}$

DC Supply Voltage (Between V+ and V- Terminals):

CA741C, CA1458 (Note 2) 36V

CA741, CA1558 (Note 2) 44V

Differential Input Voltage $\pm 30\text{V}$ DC Input Voltage (Note 1) $\pm 15\text{V}$

Output Short-Circuit Duration Indefinite

Device Dissipation:

Up to $+70^\circ\text{C}$ (CA741C) 500mWUp to $+75^\circ\text{C}$ (CA741) 500mWUp to $+30^\circ\text{C}$ (CA1558) 680mWUp to $+25^\circ\text{C}$ (CA1458) 680mWFor Temperatures Exceeding Those Indicated Above Derate Linearly $8.67\text{mW}/^\circ\text{C}$ Voltage Between Offset Null and V- (CA741C, CA741) $\pm 0.5\text{V}$

Ambient Operating Temperature Range:

CA741, CA1558 -55 to $+125^\circ\text{C}$ CA741C, CA1458 0 to $+70^\circ\text{C}$ (Note 3)

Ambient Storage Temperature Range

..... -65 to $+150^\circ\text{C}$

Lead Temperature (During Soldering):

At Distance $1/16 \pm 1/32$ Inch ($1.59 \pm 0.79\text{mm}$) from Case for 10 Seconds Max $+265^\circ\text{C}$ NOTES: 1. If Supply Voltage is Less than ± 15 Volts, the Absolute Maximum Input Voltage is Equal to the Supply Voltage.

2. Voltage Values Apply for Each of the Dual Operational Amplifiers.

3. All Types in any Package Style Can Be Operated Over the Temperature Range of -55 to $+125^\circ\text{C}$, Although the Published Limits for Certain Electrical Specifications Apply Only Over the Temperature Range of 0 to $+70^\circ\text{C}$

CA741C, CA741, CA1458, CA1558, LM741, LM741C, LM1458, LM1558

T-79-05-10




FIGURE 1a. CA741CS, CA741CT, CA741S, & CA741T WITH INTERNAL PHASE COMPENSATION.




FIGURE 1b. CA1458S, CA1458T, CA1558S, & CA1558T AND INTERNAL PHASE COMPENSATION




FIGURE 1c. CA741C AND CA741E WITH INTERNAL PHASE COMPENSATION




FIGURE 1d. CA1458E AND CA1558E WITH INTERNAL PHASE COMPENSATION

3

OPERATIONAL
AMPLIFIERS

FIGURE 1. FUNCTIONAL DIAGRAMS

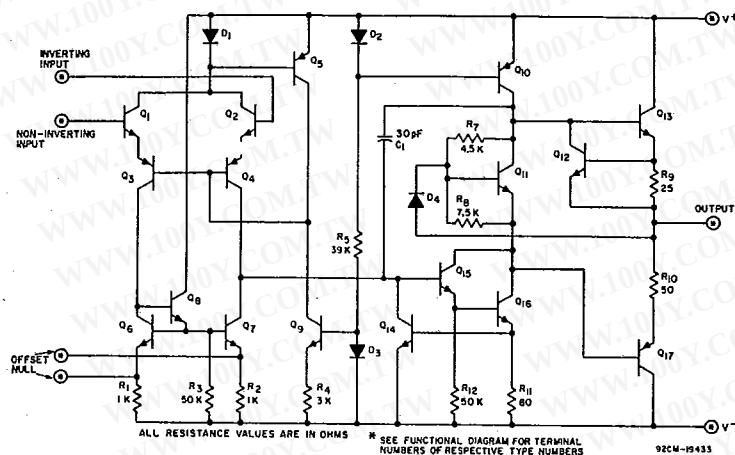


FIGURE 2. SCHEMATIC DIAGRAM OF OPERATIONAL AMPLIFIERS WITH INTERNAL PHASE COMPENSATION FOR CA741C, CA741, AND FOR EACH AMPLIFIER OF THE CA1458, AND CA1558

CA741C, CA741, CA1458, CA1558, LM741, LM741C, LM1458, LM1558**ELECTRICAL CHARACTERISTICS**

T-79-05-10

Typical Values Intended Only for Design Guidance

CHARACTERISTIC	TEST CONDITIONS $V_{\pm} = \pm 15V$	TYPICAL VALUES ALL TYPES	UNITS
Input Capacitance, C_i		1.4	pF
Offset Voltage Adjustment Range		± 15	mV
Output Resistance, R_O		75	Ω
Output Short-Circuit Current		25	mA
Transient Response:	Unity Gain $V_I = 20mV$, $R_L = 2k\Omega$, $C_L \leq 100pF$		
Rise Time, t_r			
Overshoot			
Slew Rate, S_R :	$R_L \geq 2k\Omega$	0.5	V/ μs
Closed Loop			

**ELECTRICAL CHARACTERISTICS
For Equipment Design**

CHARACTERISTIC	TEST CONDITIONS Supply Voltage, $V^+ = 15\text{ V}$, $V^- = -15\text{ V}$	Ambient Temperature, T_A	LIMITS			UNITS
			CA741C CA1458*			
			Min.	Typ.	Max.	
Input Offset Voltage, V_{IO}	$R_S \leq 10\text{ k}\Omega$	25 °C	—	2	6	mV
		0 to 70 °C	—	—	7.5	
Input Offset Current, I_{IO}		25 °C	—	20	200	nA
		0 to 70 °C	—	—	300	
Input Bias Current, I_{IB}		25 °C	—	80	500	nA
		0 to 70 °C	—	—	800	
Input Resistance, R_I			0.3	2	—	M Ω
Open-Loop Differential Voltage Gain, A_{OL}	$R_L \geq 2\text{ k}\Omega$ $V_O = \pm 10\text{ V}$	25 °C	20,000	200,000	—	
		0 to 70 °C	15,000	—	—	
Common-Mode Input Voltage Range, V_{ICR}		25 °C	± 12	± 13	—	V
Common-Mode Rejection Ratio, CMRR	$R_S \leq 10\text{ k}\Omega$	25 °C	70	90	—	dB
Supply-Voltage Rejection Ratio, PSRR	$R_S \leq 10\text{ k}\Omega$	25 °C	—	30	150	$\mu\text{V/V}$
Output Voltage Swing, V_{OPP}	$R_L \geq 10\text{ k}\Omega$	25 °C	± 12	± 14	—	V
		25 °C	± 10	± 13	—	
	$R_L \geq 2\text{ k}\Omega$	0 to 70 °C	± 10	± 13	—	
Supply Current, $I^{\pm}$		25 °C	—	1.7	2.8	mA
Device Dissipation, P_D		25 °C	—	50	85	mW

* Values apply for each section of the dual amplifiers.

CA741C, CA741, CA1458, CA1558, LM741, LM741C, LM1458, LM1558

ELECTRICAL CHARACTERISTICS
For Equipment Design

T-79-05-10

CHARACTERISTIC	TEST CONDITIONS Supply Voltage, V ⁺ = 15 V, V ⁻ = -15 V		LIMITS			UNITS
			CA741 CA1558*			
	Ambient Temperature, T _A	Min.	Typ.	Max.		
Input Offset Voltage, V _{IO}	R _S = ≤ 10 kΩ	25 °C	—	1	5	mV
		-55 to +125 °C	—	1	6	
Input Offset Current, I _{IO}		25 °C	—	20	200	nA
		-55 °C	—	85	500	
		+125 °C	—	7	200	
Input Bias Current, I _{IB}		25 °C	—	80	500	nA
		-55 °C	—	300	1500	
		+125 °C	—	30	500	
Input Resistance, R _I			0.3	2	—	MΩ
Open-Loop Differential Voltage Gain, A _{OL}	R _L ≥ 2 kΩ V _O = ± 10 V	25 °C	50,000	200,000	—	
		-55 to +125 °C	25,000	—	—	
Common-Mode Input Voltage Range, V _{ICR}		-55 to +125 °C	±12	±13	—	V
Common-Mode Rejection Ratio , CMRR	R _S ≤ 10 kΩ	-55 to +125 °C	70	90	—	dB
Supply Voltage Rejection Ratio, PSRR	R _S ≤ 10 kΩ	-55 to +125 °C	—	30	150	μV/V
Output Voltage Swing, V _{OPP}	R _L ≥ 10 kΩ	-55 to +125 °C	±12	±14	—	V
	R _L ≥ 2 kΩ	-55 to +125 °C	±10	±13	—	
Supply Current, I [±]		25 °C	—	1.7	2.8	mA
		-55 °C	—	2	3.3	
		+125 °C	—	1.5	2.5	
Device Dissipation, P _D		25 °C	—	50	85	mW
		-55 °C	—	60	100	
		+125 °C	—	45	75	

* Values apply for each section of the dual amplifiers.

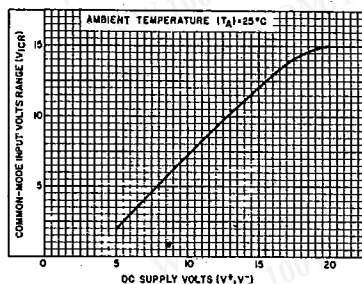


FIGURE 3. COMMON-MODE INPUT VOLTAGE RANGE vs. SUPPLY VOLTAGE FOR ALL TYPES.

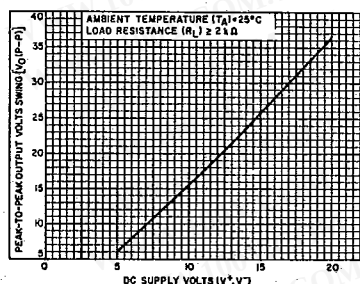


FIGURE 4. PEAK-TO-PEAK OUTPUT VOLTAGE vs. SUPPLY VOLTAGE FOR ALL TYPES

3

OPERATIONAL
AMPLIFIERS

CA741C, CA741, CA1458, CA1558, LM741, LM741C, LM1458, LM1558

T-79-05-10

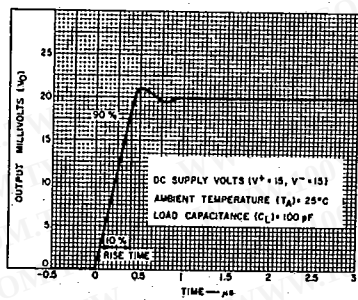


FIGURE 5. OUTPUT VOLTAGE vs. TRANSIENT RESPONSE TIME FOR CA741C AND CA741




FIGURE 6. VOLTAGE OFFSET NULL CIRCUIT FOR CA741C AND CA741


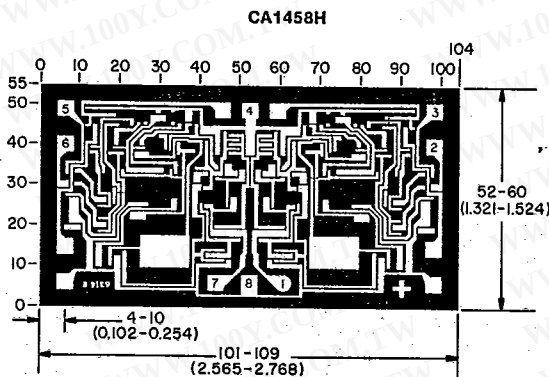
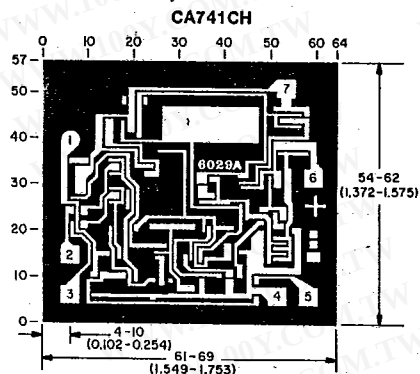


FIGURE 7. TRANSIENT RESPONSE TEST CIRCUIT FOR ALL TYPES

Chip Photos

DIMENSIONS AND PAD LAYOUTS

NOTE: Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils (10^{-3} inch).

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)