

REVISIONS		
REV	DESCRIPTION	DATE
B	Design Change No. 9406001	06/16/05
		APPROVED
		C. T. Tsai

SPECIFICATIONS

MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 20 milliohms MAX, Initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min


UL, CUL ND, E166003

370-18X1-10001

Gold Plating

- 1 - 3u"
- 2 - 6u"
- 3 - 15u"
- 4 - 30u"
- 5 - 50u"

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

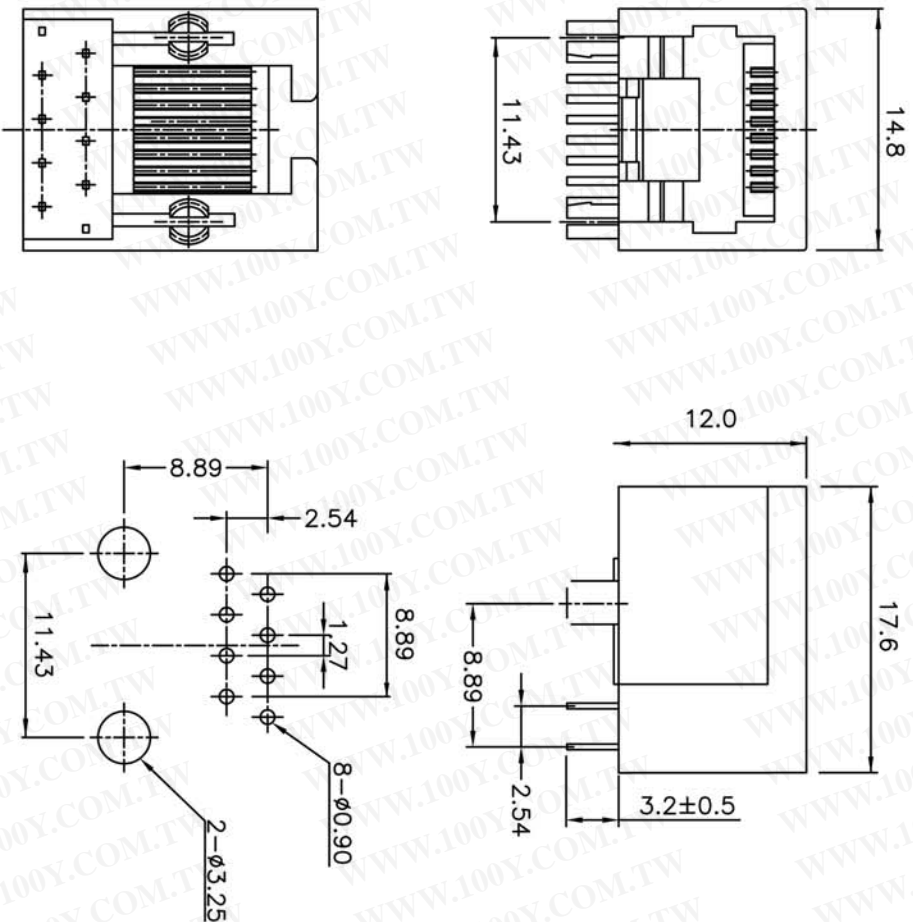

PCB LAYOUT/TDP VIEW

X ±0.3 .XX ±0.20	UNITS	mm	DWG NO.:	TITLE:
	SCALE	Free	APPD: C. T. Tsai	10P Side Entry Very L/P Modular Jack
TOLERANCE			CHKD:	PART NO.:
			DR: s. k. Liu	370-18X1-10001
			SHEET: 1/1	
			REV: B	
			DATE: 06/16/05	