

SHINDENGEN

Power Switching Regulators

MA2000 Series


MA2450

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

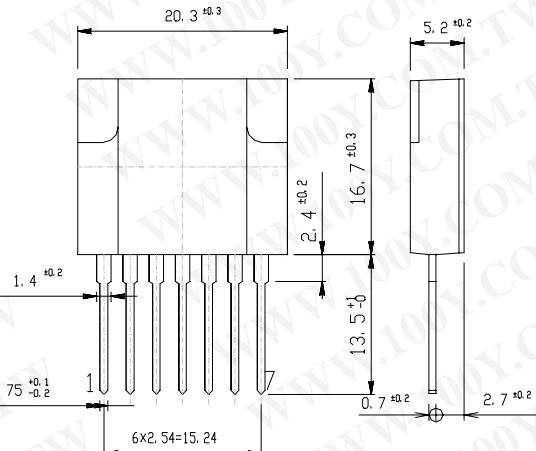

RATINGS

Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	Tstg		-30~125	-30~125	°C
Operating Temperature	Top	Case Temperature	-20~125	-20~125	°C
Junction Temperature	Tj		150	150	°C
Peak Input Voltage	Vin	(2)+,(4)-,Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I _{CEX} .	500	500	V
Input Current	Iin	Pulse Pulse Width 150 μ s MAX, Duty1/2, Sawtooth Wave, Peak Value, (2)+,(4)-	10	10	A
Maximum Operating Frequency	f(max)		200	200	kH _Z
Maximum Power Dissipation	P _D	T _a =25°C	3	3	W
	P _D	Heatsink T _c =100°C	20	20	W
Dielectric Strength	Vdis	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V _{CONT} (max)	Fold Control Resistance=0Ω Duty 1/2, (4),(7)	±8	±8	V
Fold Back Control Current	I _{CONT} (max)	(4)-(6)+	100	100	mA

Electrical Characteristics (T_c=25°C)

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Q1	Collector Cutoff Current	I _{CEX} V _{CE} =500V, Fig.1 is Measurement Circuit of Peak Input Voltage Vin and Collector Cutoff Current I _{CEX} , (2)+(4)-	MAX 0.1	MAX 0.1	mA
	DC Current Gain	h _{FE} V _{CE} = 5V, I _C = 5A, (2)+(4)-(5)I _B	15~30	-	
	Collector to Emitter Saturation Voltage	V _{CE(sat)} I _C =5.0A, I _B =1.0A, (2)+(4)-(5)I _B	MAX 1.0	MAX 1.0	V
	Thermal Resistance	θ _{jc} Junction to Case	MAX 2.5	MAX 2.5	°C/W
D1	Reverse Current	I _R V _R =450V, (1)+(2)-	MAX 10	MAX 10	μA
	Forward Voltage	V _F I _F =0.6A, (1)-(2)+	MAX 1.7	MAX 1.7	V
Driving Saturation Voltage			MIN 1.7	MIN 1.7	
			MAX 2.3	MAX 2.3	V

● Standard Operating Condition•Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage		AC90~132	AC90~132	V
Output Nominal Wattage		100	100	W
Output Nominal Voltage		15	15	V
Output Nominal Current		6.6	6.6	A

● Standard Operating Condition•Standard Operating Characteristics ($T_a=25^\circ C$)

Item	Conditions	Ratings		Unit
		P Class	N Class	
Minimum Input Full Load Output Voltage	$V_{in}=90V, I_O=6.6A$	15.0 ± 0.75	15.0 ± 0.75	V
Maximum Input Light Load Output Voltage	$V_{in}=132V, I_O=0.66A$	15.0 ± 0.75	15.0 ± 0.75	V
AC Input Voltage	$I_O=6.6A$	MAX 85	MAX 85	V
Over Current Protection	Foldback Current	MAX 10	MAX 10	A
	Short Circuit	Nodamage To Any Device, Automatic Recovery.		Fig 2, ④ Refer
Output Ripple Noise	$V_{in}=90 \sim 132V, I_O=0.66 \sim 6.6A$	MAX 150	MAX 150	mV P-P

Figure in ○=Terminal Sign




Fig1. Measurement Circuit






Fig2. Output Voltage/Current


MA2450 Transient Thermal Impedance

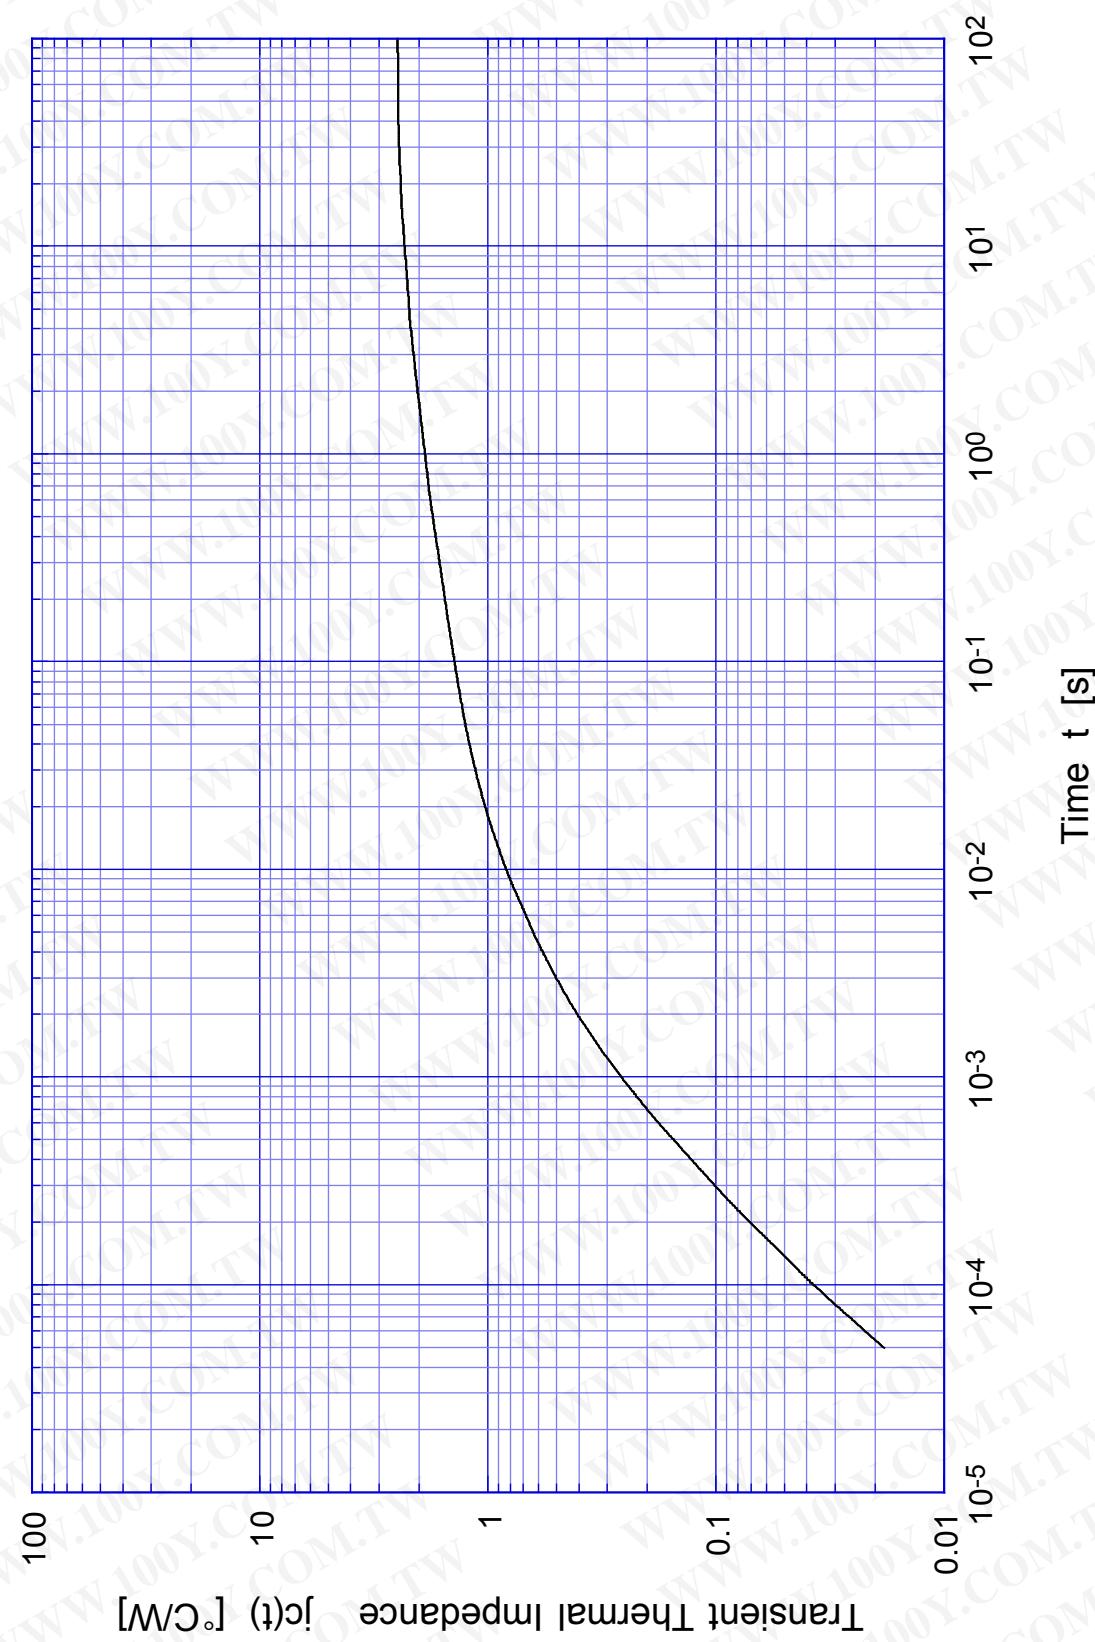

MA2450

Forward Bias SOA

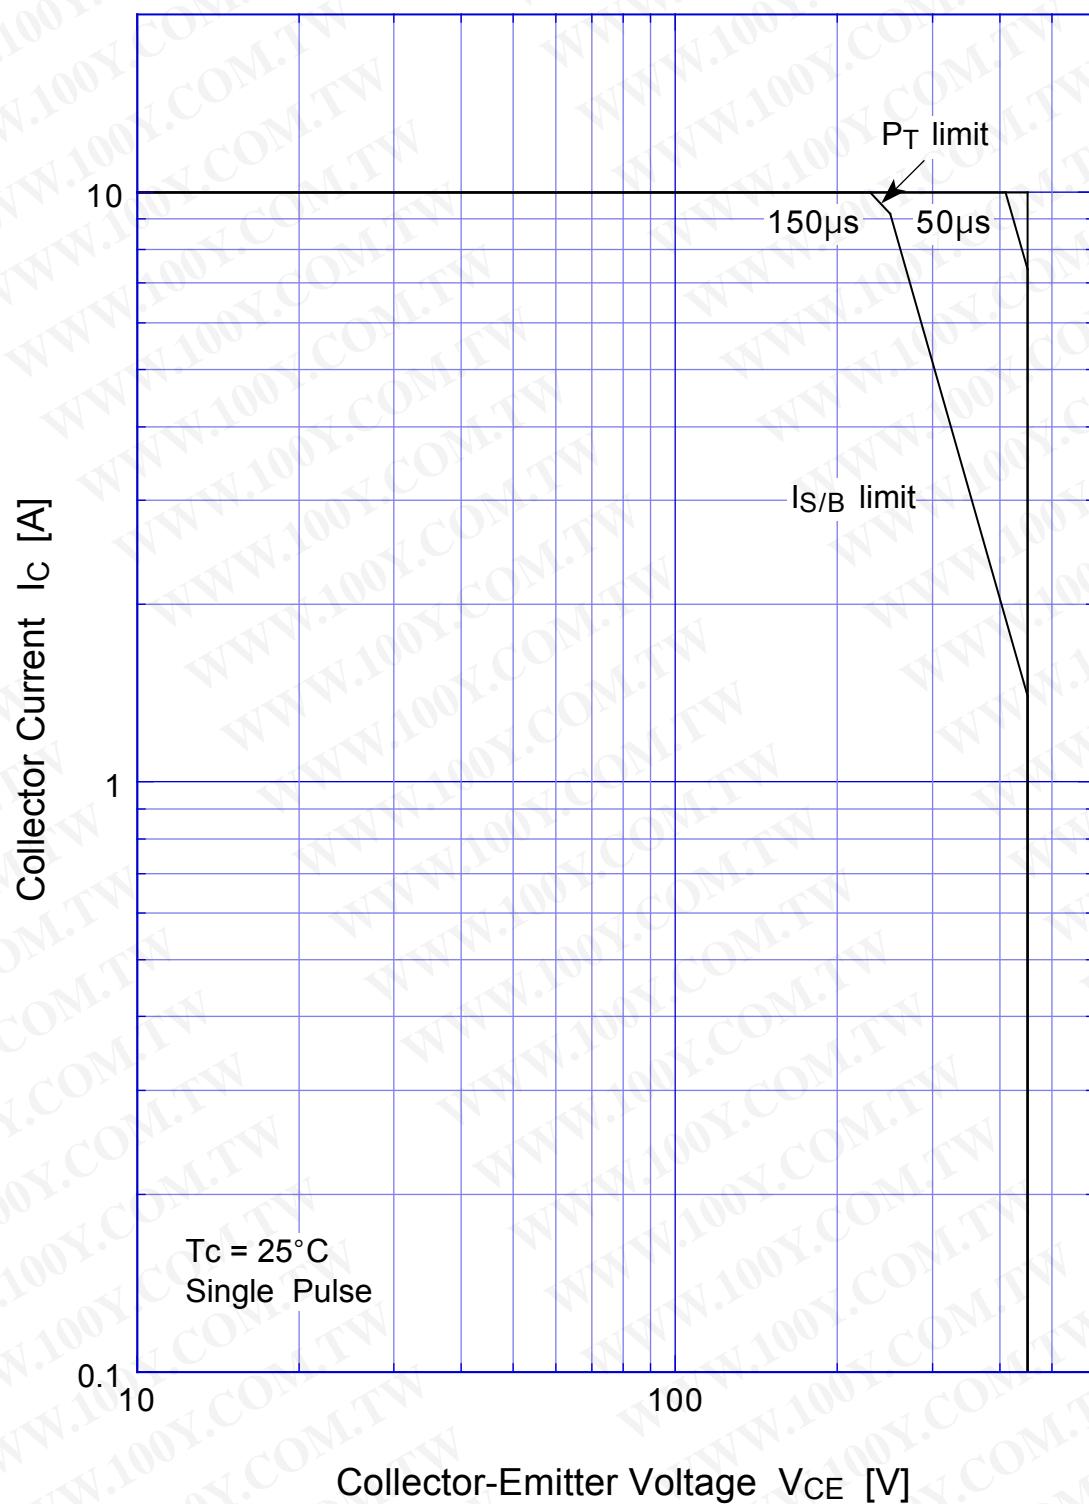

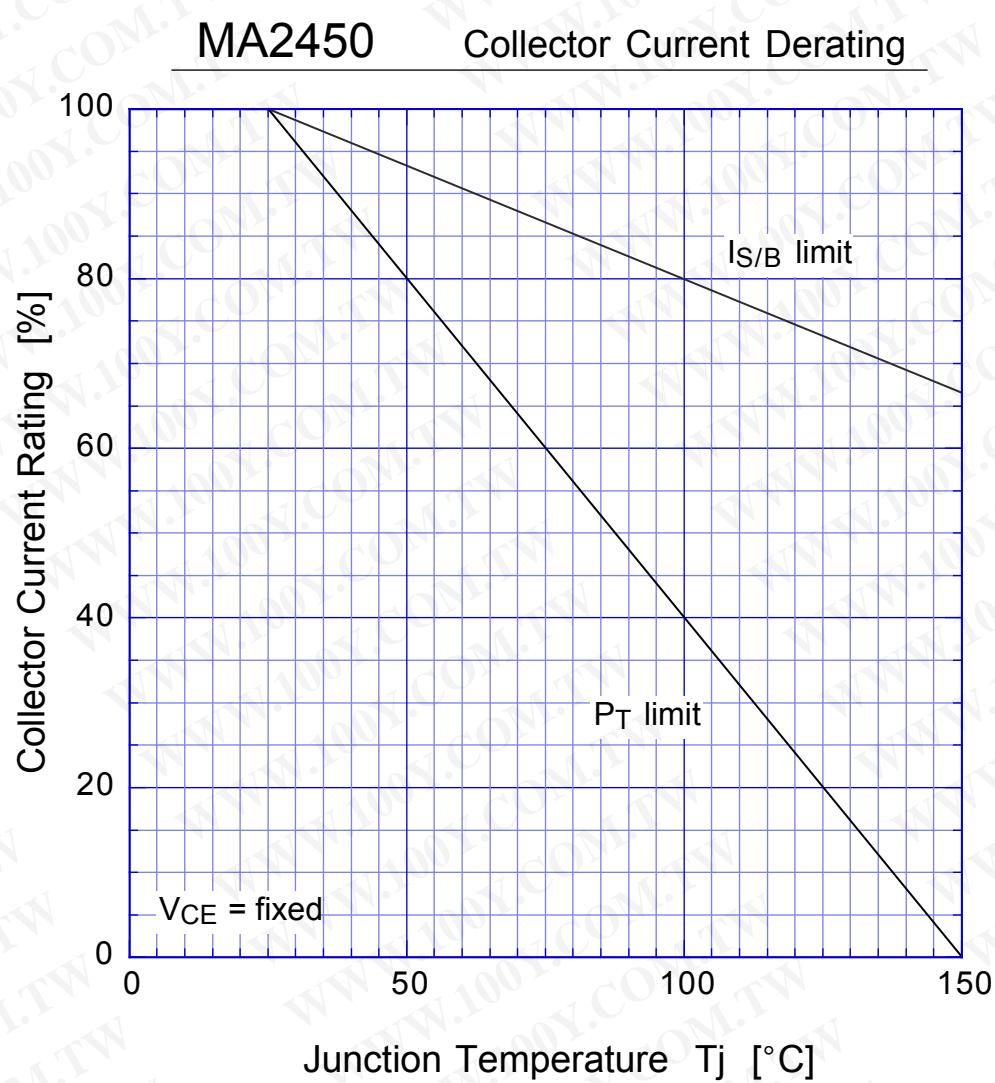

MA2450

Reverse Bias SOA

