

THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	9/7/11	
A	Updated Note 1, material was BeCu; Deleted Note 2.	2/18/15	

NOTES:

1. OUTER CONDUCTOR AND BODY - BRASS, NICKEL PLATED.  
CENTER CONDUCTOR - BRASS AND PHOS. BRONZE, GOLD PLATED.  
DIELECTRIC - (TEF) FLUOROCARBON.

2. n/a

3. SPECIFICATIONS:

FREQUENCY RANGE - DC TO 4 GHz.

ATTENUATION ACCURACY - 0 TO 6 dB ±0.3 dB.  
7 TO 20 dB ±0.5 dB.  
21 TO 30 dB ± 0.75 dB.


VSWR (MAX) - DC TO 4 GHz 1.25:1.

POWER - 2 W (AVG.) @ 25° C DERATED LINEARLY TO 0.5 W @ 125° C  
250 W (PEAK) 5 μs PULSE WIDTH, 0.05% DUTY CYCLE.

IMPEDANCE - 50 Ω ±1 Ω TYP.

OPERATING TEMPERATURE: -65° C TO +125° C.

TEMPERATURE COEFFICIENT: 10-4 dB/dB/°C.

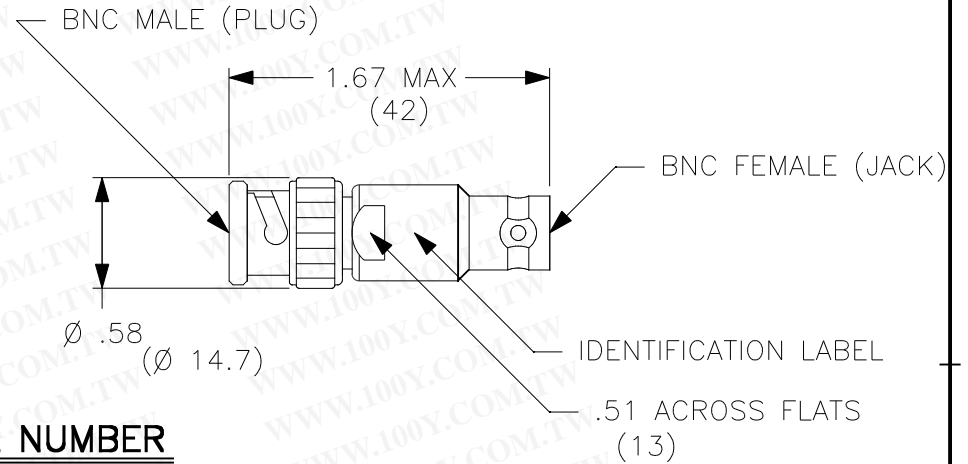

**MODEL NUMBER**

**CT3369A-XX**

- ATTENUATION (dB):
- 03 - 3 dB
  - 06 - 6 dB
  - 08 - 8 dB
  - 10 - 10 dB
  - 14 - 14 dB
  - 20 - 20 dB
  - 30 - 30 dB

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING		CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610			
		MATERIAL		APPROVALS	DATE	TITLE <b>ATTENUATOR, FIXED, BNC MALE TO FEMALE, 50Ω</b>			
		FINISH		DRAWN					
NEXT ASSY		USED ON		CHECKED		SIZE	CAGE CODE	DWG. NO.	REV.
APPLICATION				ENGR.		<b>A</b>	<b>43F45</b>	<b>P3369A0</b>	<b>A</b>
				DESIGN ACTIVITY		SCALE	1:1	SHEET	1 OF 1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Cal Test Electronics:

[CT3369A-20](#) [CT3369A-03](#) [CT3369A-06](#) [CT3369A-30](#) [CT3369A-10](#) [CT3369A-08](#) [CT3369A-14](#) [CT3353-10](#)  
[CT3353-06](#) [CT3353-03](#) [CT3382](#) [CT3353-20](#) [CT3417](#)