


3M™ Round Conductor Flat Cable

.050" 26 AWG Stranded, PVC

3801 Series

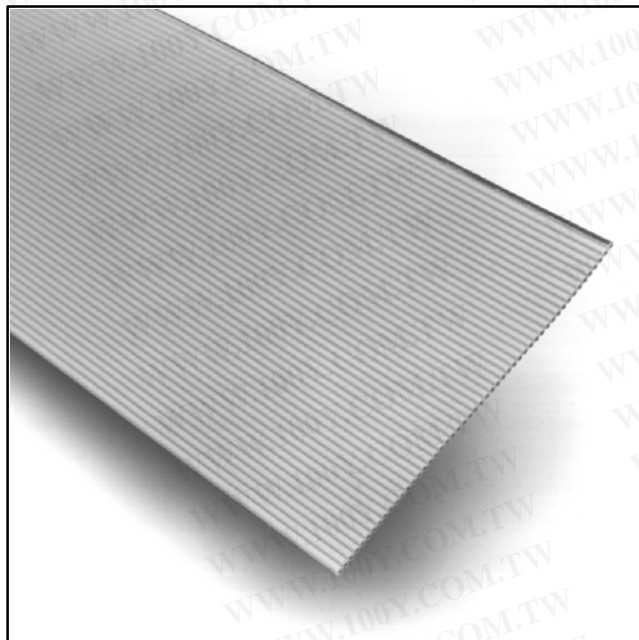

- 26 AWG wire allows for higher power levels
- Stranded wire provides flexibility and extended product life
- .050 inch centers permit mass termination to a broad line of IDC connectors
- Zippable for branching or discrete termination
- Available in Gray and Black
- RoHS compliant

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Date Modified: March 29, 2004

TS-0063-16
Sheet 1 of 2



Physical

Insulation

Material: Polyvinyl Chloride (PVC)

Color: Gray Standard, Black (See ordering information.)

Marking: None

Canadian Option:  AWM 2651 105C 300V VW1 3M NU  AWM IA 105C 300V FT1
EU <50V

Conductors: 26 AWG 7 × 34 [7 × 0.160] Tinned Stranded Copper

Electrical

Voltage Rating: USA: 300V Canada: 300V EU: <50V

Insulation Resistance: $> 1 \times 10^{10} \Omega/10 \text{ ft.}$ [3m]

Characteristic Impedance: Unbalanced: 89 Ω

Capacitance: Unbalanced: 16.2 pF/ft. [53.1 pF/m]

Inductance: Unbalanced: .13 $\mu\text{H}/\text{ft.}$ [0.43 $\mu\text{H}/\text{m}$]

Propagation Delay: Unbalanced: 1.44 ns/ft. [4.72 ns/m]

Velocity of Propagation: Unbalanced: 71%

Note: Unbalanced is measured between ground-signal-ground conductors.

Environmental

Temperature Rating: -20°C to +105°C

Flammability Rating: USA: VW-1 Canada: FT1

*RoHS = Directive 2002/95/EC, Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment

UL File No.: E42769, Style No.: 2651

3M
Interconnect Solutions
<http://www.3M.com/interconnects/>

3M is a trademark of 3M Company.
For technical, sales or ordering information call
800-225-5373


3M™ Round Conductor Flat Cable

.050" 26 AWG Stranded, PVC

3801 Series

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Number of Conductors	3M Part Number	Dimension A	Dimension B
09	3801/09	0.450 ± .010 [11.43]	0.400 ± .007 [10.16]
10	3801/10	0.500 ± .010 [12.70]	0.450 ± .007 [11.43]
14	3801/14	0.700 ± .010 [17.78]	0.650 ± .007 [16.51]
15	3801/15	0.750 ± .010 [19.05]	0.700 ± .007 [17.78]
16	3801/16	0.800 ± .015 [20.32]	0.750 ± .011 [19.05]
18	3801/18	0.900 ± .015 [22.86]	0.850 ± .011 [21.59]
20	3801/20	1.000 ± .015 [25.40]	0.950 ± .011 [24.13]
24	3801/24	1.200 ± .015 [30.48]	1.150 ± .011 [29.21]
25	3801/25	1.250 ± .015 [31.75]	1.200 ± .011 [30.48]
26	3801/26	1.300 ± .015 [33.02]	1.250 ± .011 [31.75]
30	3801/30	1.500 ± .020 [38.10]	1.450 ± .015 [36.83]
34	3801/34	1.700 ± .020 [43.18]	1.650 ± .015 [41.91]
36	3801/36	1.800 ± .020 [45.72]	1.750 ± .015 [44.45]
37	3801/37	1.850 ± .020 [46.99]	1.800 ± .015 [45.72]
40	3801/40	2.000 ± .020 [50.80]	1.950 ± .015 [49.53]
44	3801/44	2.200 ± .020 [55.88]	2.150 ± .015 [54.61]
50	3801/50	2.500 ± .020 [63.50]	2.450 ± .015 [62.23]
60	3801/60	3.000 ± .020 [76.20]	2.950 ± .015 [74.93]
64	3801/64	3.200 ± .020 [81.28]	3.150 ± .015 [80.07]

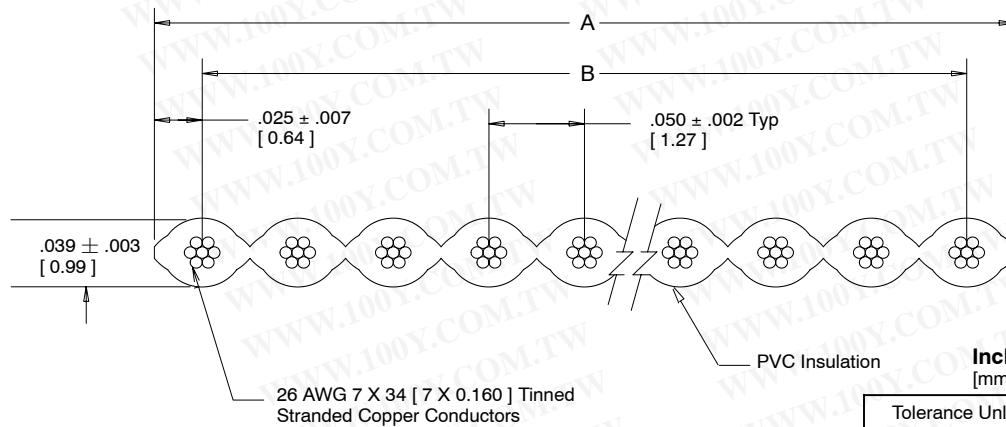


Tolerance Unless Noted			
	.0	.00	.000
Inch	±.1	±.01	±.005

Note: Red marking on one edge of cable designates wire #1.

[] Dimensions for Reference only

Ordering Information

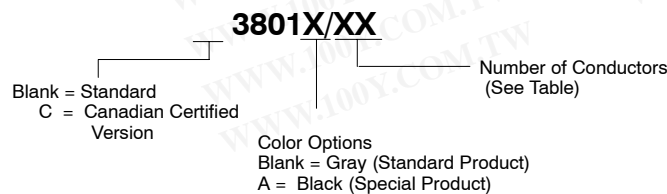

TS-0063-16
Sheet 2 of 2