HALF SIZE (8PIN) OSCILLATOR

•Part Number Guide

T-V-S-FF.FFFM- FS-OT-OP -TU-S

T (Type型号) : QB=HALF SIZE (8PIN) OSCILLATOR
V (Input Voltage输入电压) : 3=3.3V 5=5.0V, etc
S (Symmetry占空比) : 5=45/55 Max 6=40/60 Max
F (Frequency标称频率) : Normal – 5 digitals of Frequency, e.g. 8.0000M, 12.000M
Special – All digitals of Frequency, e.g. 13.225625M
FS (Frequency Stability总频差) : 50=±50 ppm, etc
OT (Operating Temperature工作温度) : 0070= 0°C to +70°C 4085= –40°C to +85°C, etc
OP (Output输出) : 1=15PF HCMOS 2=10TTL 3=30PF 4=50PF 5=10TTL/15PF
TU (Tube摆管)
S (Special Requirement特殊要求)

Pb Free

RoHS Compliant Directive 2002/95/EC

•Electrical Specifications 电气参数

型号	Holder Type	HALF SIZE (8PIN) OSCILLATOR
频率范围	Frequency Range	1.0000 MHz to 100.00 MHz
总频差	Frequency Stability	±25ppm to ±50ppm
输入电压	Supply Voltage	5.0V or 3.3V ±10%
工作温度范围	Operating Temperature Range	–10°C ~ +60°C to –40°C ~ +85°C
储存温度范围	Storage Temperature Range	–40°C ~ +85°C/–55°C ~ +125°C
占空比	Symmetry (Duty Cycle)	40/60 Standard
输出	Output Load	10 TTL or 15pF HCMOS
消耗电流	Current Consumption	
	1.8V/3.3V/5.0V	1.0000MHz–10.000MHz=10mA Max
	1.8V/3.3V/5.0V	10.000MHz–40.000MHz=20mA Max
	1.8V/3.3V	40.000MHz–60.000MHz=30mA Max
	5.0V	40.000MHz–60.000MHz=35mA Max
	1.8V/3.3V	60.000MHz–100.00MHz=40mA Max
	5.0V	60.000MHz–100.00MHz=60mA Max
上升/下降时间	Rise/Fall Time	10nS Max

•Mechanical Dimensions 外型尺寸

UNIT (单位) : mm (毫米)





PIN	FUNCTION
1	N/C or Tri-state
4	Ground
5	Output
8	Vdd

•Test Circuit 测试电路

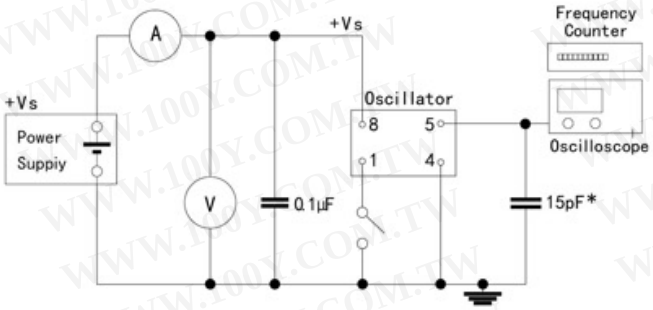

•Reflow Condition 回流焊条件

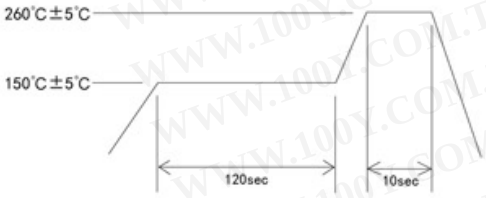

CYCLE TIME:200sec Max.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw