



# SPECIFICATION FOR APPROVAL

CUSTOMER : \_\_\_\_\_

PRODUCT TYPE : HC-49/S

NOMINAL FREQ. : 16.000000MHz

TXC P/N : 9B16000229

REVISION : A1

CUSTOMER P/N : \_\_\_\_\_

PM / SALES : \_\_\_\_\_

DATE : \_\_\_\_\_

CUSTOMER SIGNATURE & Date \_\_\_\_\_

- (1) TXC requires one copy returned with signature and title of authorized individual that signifies acceptance of the attached specifications.
- (2) Orders received and accepted by TXC after return of signed copy of specification will be produced per these specifications.
- (3) Any changes to these specifications must be agreed upon by both parties and new revision of the Product Specification Sheet will be issued.
- (4) Any issuance of purchase order prior to consigning back the Approval page of "Specification Sheets" from customers will be regarded as the agreement on the contents of these specifications.

Attachment: Product Specification Sheet

- 1
- 2
- 3
- 4
- 5

**RoHS Compliant**



## CONTENT

### SPECIFICATIONS

PAGE

- ELECTRICAL SPECIFICATIONS
- DIMENSIONS
- MARKING
- PACKING
- RELIABILITY SPECIFICATIONS

4  
5  
6  
7  
8

### ATTACHMENT(S) (optional)

#### TESTING DATA

- ELECTRICAL CHARACTERISTICS TEST A  YES  NO
- TEMPERATURE CHARACTERISTICS TEST B  YES  NO

**ELECTRICAL SPECIFICATIONS**

**Standard atmospheric conditions**

Unless otherwise specified, the standard range of atmospheric conditions for making measurement and tests are as follow:

- Ambient temperature : 25+/-5°C
- Relative humidity : 40%~70%

If there is any doubt about the results, measurement shall be made within the following limits:


- Ambient temperature : 25+/-1°C
- Relative humidity : 40%~70%

**Measure equipment**

**SAUNDERS 250A/250B CRYSTAL IMPEDANCE METER.**

**Crystal cutting type**

The crystal is using AT CUT (thickness shear mode).



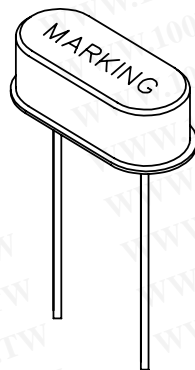


please refer to marking code page

1.	Nominal Frequency	16.000000 MHz
2.	Oscillation Mode	Fundamental
3.	Load Capacitance	20.0 pF
4.	Frequency Tolerance (25 °C)	+/- 30 ppm
5.	Effective Series Resistance	40 Ohms Max.
6.	Shunt Capacitance (C0)	7.0 pF Max.
7.	Motional Capacitance (C1)	N/A fF
8.	Drive Level	100 uW Typ.
9.	Operation Temperature Range	-10 °C ~ +60 °C
10.	Stability Over Temperature Range	+/- 30 ppm (related to 25 °C)
11.	Insulation Resistance	500 MOhms Min. at DC 100V
12.	Attenuation of Spurious Frequency Amplitude	N/A
13.	Ratio of Holder to Motional (C0/1)	N/A
14.	Storage Temperature	-40 °C ~ +85 °C
15.	Aging	+/- 5.0 ppm / year.
16.	Weight	0.54 g +/- 0.05g

**DIMENSIONS**


UNIT:mm

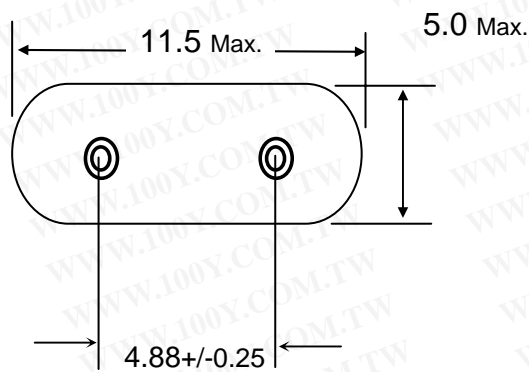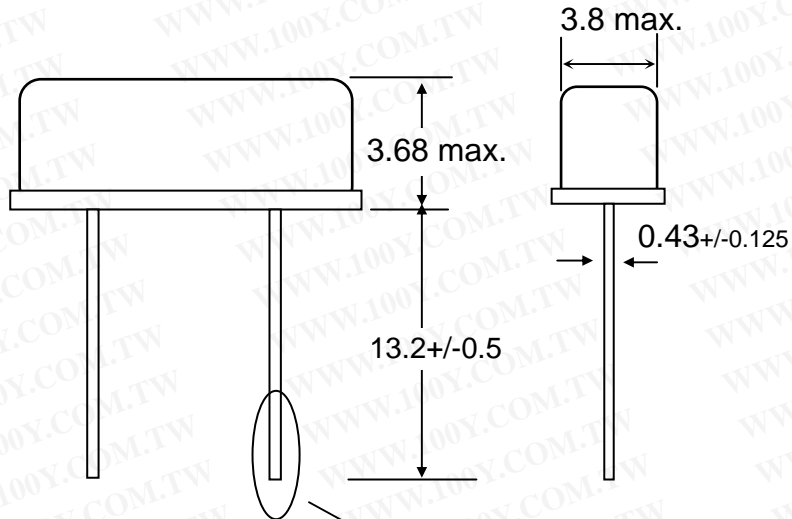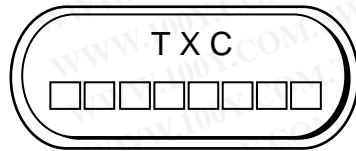

Solder Coating  
(Sn-Ag-Cu Pb Free Coating)

**MARKING**

**Marking For Pb Free Parts :**

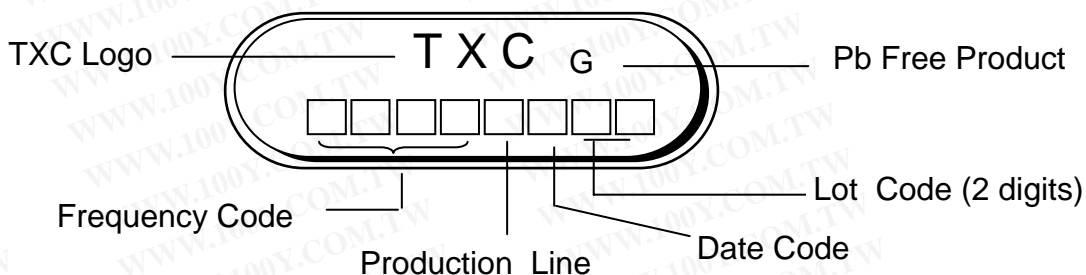


**Date Code:**

YEAR					MONTH											
					JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2001	2005	2009	2013	2017	A	B	C	D	E	F	G	H	J	K	L	M
2002	2006	2010	2014	2018	N	P	Q	R	S	T	U	V	W	X	Y	Z
2003	2007	2011	2015	2019	a	b	c	d	e	f	g	h	j	k	l	m
2004	2008	2012	2016	2020	n	p	q	r	s	t	u	v	w	x	y	z

\*This date code will be cycled every four years.

**For example : Marking**

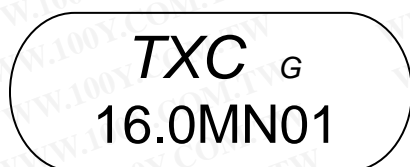


→ Introduction : Pb Free Product  
49S 16.000 MHz  
Made in 2006/JAN. 01Lot




**Packing For Pb Free Parts :**

**1. INNER BOX : (Unit : mm)**


5bagx200pcs  
=1000pcs/box

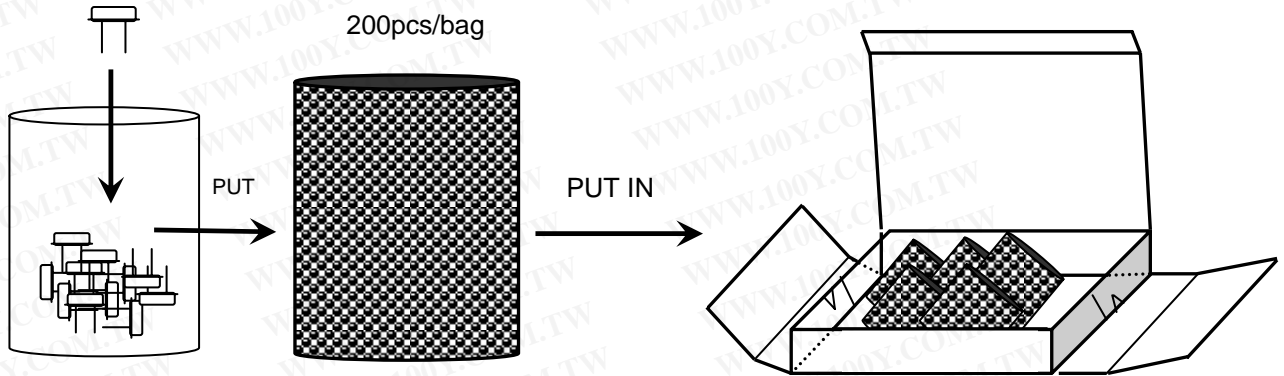


**2. LOGO STICKER(CARTON and INNER BOX) : (Unit : mm)**

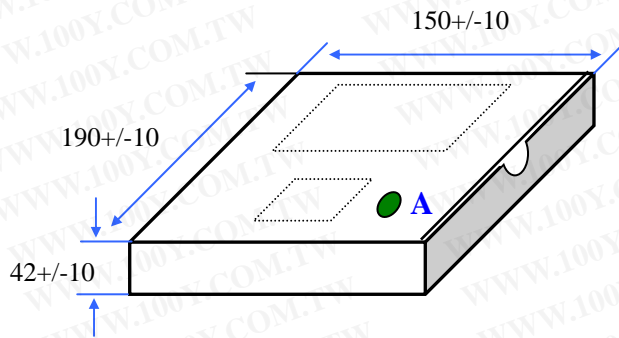

PUT IN

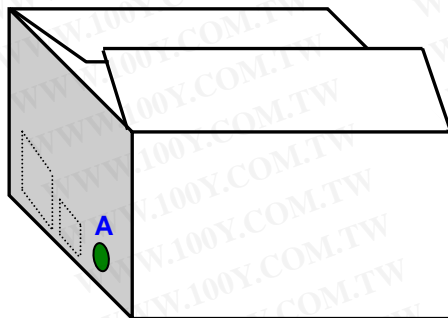


Label A



- # (1) Put in stuff between space.
- (2) Tie Up the Carton with 4 Packthreads.
- (3) "G" : Pb-Free Product

**RELIABILITY SPECIFICATIONS**

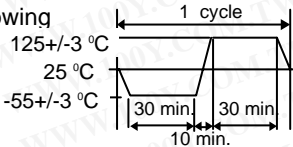No.	TEST ITEM	TEST METHODS	TEST CRITERIA	REF. DOC
1	Drop Test	50 cm Height, Fall freely onto firm wood for 3 Times.	dF/F<+/-5ppm dRs<+/-10%	JIS C6701
2	Fine Leak	Helium Bombing 5Kgf / cm <sup>2</sup> for 2 Hours .	Leak Rate Less Than 2x10 <sup>-8</sup> atm.cc/sec	MIL-STD-883E Method 1014.10
3	Gross Leak	125°C FC#40 ,120 Seconds.	No Continuous Bubble .	MIL-STD-883E Method 1014.10
4	Mechanical Shock	Device are shocked to half sine wave ( 1000 G ) three mutually perpendicular axes each 3 times.	dF/F<+/-5ppm dRs<+/-10%	MIL-STD-883E Method 2002.4
5	Vibration	Frequency range 10 ~ 55 Hz Amplitude 10G Sweep Time 1 minute Test Time X,Y,Z Plan,each 2 hrs.	dF/F<+/-5ppm dRs<+/-10%	MIL-STD-883E Method 2007.3
6	Solderability	Temperature 235 °C +/- 5 °C Immersing depth 0.5 mm minimum Immersion time 5 +/- 0.5 seconds Flux Rosin resin methyl alcohol solvent ( 1 : 4 )	Check by Microscope At Least 95% Coated	MIL-STD-883E Method 2003.7
7	Resistance To Soldering Heat	Test Temperature 260 °C +/- 5 °C Test Time 10 +/- 1 sec.	dF/F<+/-5ppm dRs<+/-10%	MIL-STD-202F Method 210D
8	Terminal Strength	2.5mm From terminal , bend 90°,3 times.	Lead without crack or broken.	MIL-STD-202F Method 208F
9	Thermal Shock	Total 5 cycles of the following temperature cycle 	dF/F<+/-5ppm dRs<+/-10%	MIL-STD-883E Method 1011.8

Measure in room temperature after each tests.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)