


"Twist" Flanged socket sloping
IP67 watertight

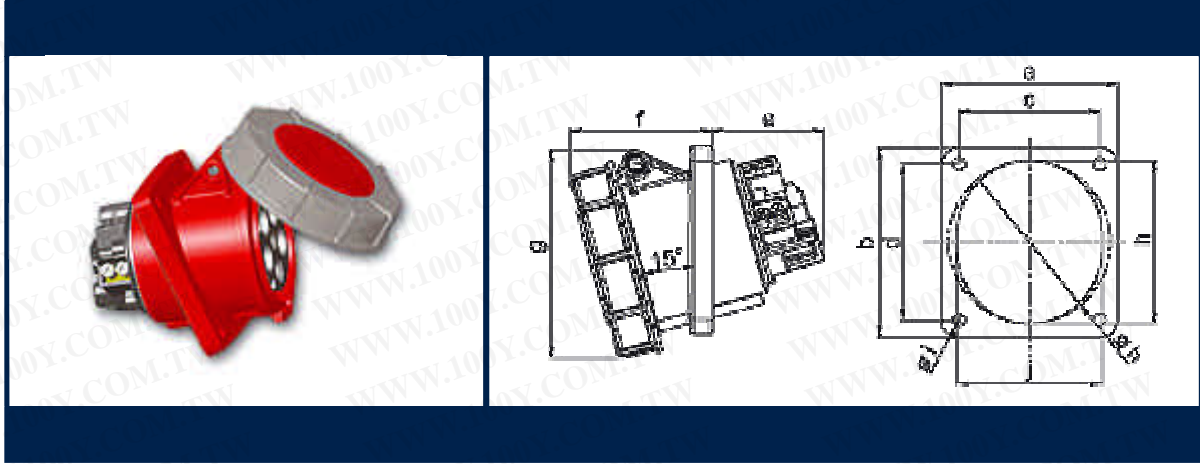

- to order nickel-plated contacts please add a "v" e.g. 433-6v
- with lamellar contact
- to order with pilot contact please add a "5" e.g. 4335-6

Dimensions:

Ampere	63	63	63
Poles	3	4	5
Flange a	100	100	100
Flange b	112	112	112
Fix.center c	80	80	80
Fix.center d	88	88	88
e	64	64	64
f	80	80	80
h	119	119	119
j	92	92	92
i	7	7	7
g	82	82	82
Weight	498	529	675

Catalogue Numbers:

Ampere	Poles	110V~	230V~	400V~	500V~	>50-500V~	>50-500V~
		50/60Hz 4h Cat.No.	50/60Hz 3p=6h 4p+5p=9h Cat.No.	50/60Hz 3p=9h 4p+5p=6h Cat.No.	50/60Hz 7h Cat.No.	100-300Hz 10h Cat.No.	301-500Hz 2h Cat.No.
63	3	433-4	433-6	433-9	433-7	433-10	433-2
63	4	434-4	434-9	434-6	434-7	434-10	434-2
63	5	435-4	435-9	435-6	435-7	435-10	435-2