



P.C.B. Layout

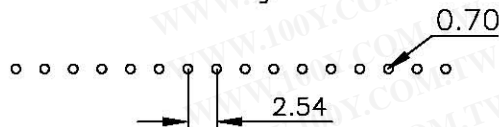

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2 μ m/80 μ "Ni, 5 μ m/200 μ "Sn

Gold Plated:2 μ m/80 μ "Ni,Full gold

Insulator(black): Black (PPS) UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 4m\Omega$ /contact

Insulation resistance: $\geq 5000M\Omega$ at V=500V

Dielectric Withstanding Voltage: 1000V AC Min

Operaing voltage: 60VAC/DC

Mechanical:

Operaing temperatures: Gold Plsted:-55 $^{\circ}C$ to+125 $^{\circ}C$

Tin plated:-40 $^{\circ}C$ to+105 $^{\circ}C$

Soldering temperature: +260 $^{\circ}C$,10s max.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

				TOLERANCES ARE		APPROVED DATE		DRAWING NO		
				X. ±0.25				AP-ABDXX10XXS		
				X.X ±0.1		CHECKED DATE		NAME		
				X.XX ±0.01						
				X.XXX ±0.005		DRAWN DATE		UNIT	SCALE	REV
				X.XXXX ±0.002		Lee 2006/06/02		MM	1:1	A
△	新圖發行	Lee	2006-06-02	SER	REVISIONS	CHK	DATE			