REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 06/30/06'		LJC 06/30/06'
B	ADD P/N CODE Ⓑ	JLZ 02/11/15'		



Dual ROWS



Single ROW

V/T TYPE

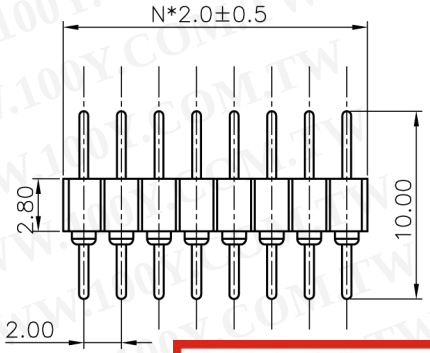

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

NOTES:

1. ELECTRICAL CHARACTERISTICS:
   - 1.1 CONTACT RESISTANCE: 20mΩ Max.
   - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
   - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
   - 2.1 TEMPERATURE: −40°C~+105°C.
3. PRODUCT NUMBER CODE:

DS1004−01 − X X X X X Ⓑ

- Bend type(For single row SMT only)
  - A: R1 Type
  - B: R2 Type
- Housing color
  - B: Black
- Contact plating
  - 1: Tin 150u"
  - 2: Tin 200u"
  - 3: G/F
  - 4: Gold 3u"
  - 5: Gold 10u"
  - 6: Gold 15u"
- Mounting type:
  - V: V/T TYPE
  - R: R/A TYPE
  - S: SMT TYPE
- No.OF CONTACTS
  - 1*1 − 1*40
  - 2*1 − 2*40



Dual ROWS



Single ROW

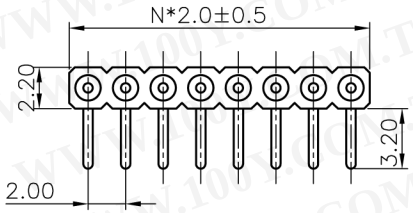

R/A TYPE

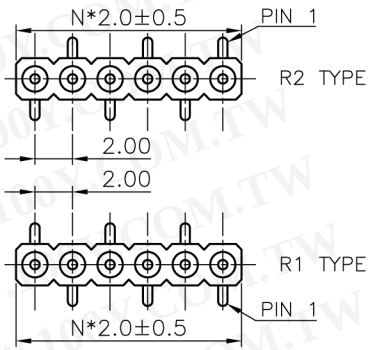



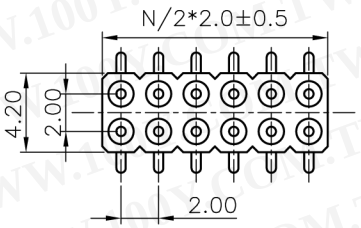

Dual ROWS



Single ROW

SMT TYPE

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C−DS1004−01−XXXXX−B		

PROJECTION		TITLE	DIP & SMT STRIPS ADAPTOR PITCH 2.00mm
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1004−01 SERIES