




勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

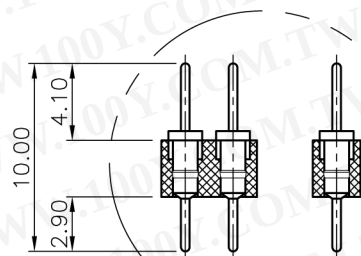


TYPE 1

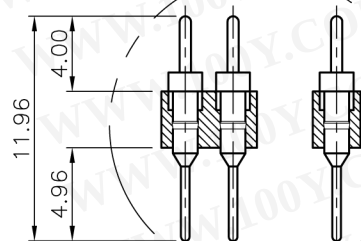

TYPE 2

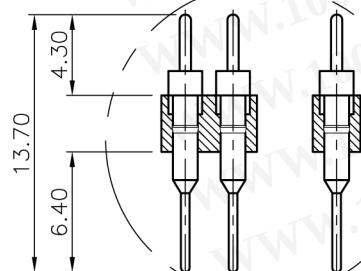


TYPE 3


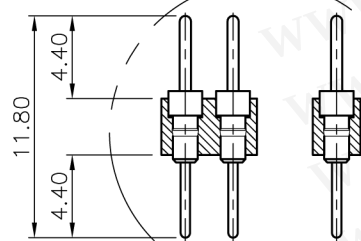


TYPE 4


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)




DUAL ROW SINGLE ROW




TYPE1/2/3/4 DIA. (TOLERANCE=±0.05)




TYPE 1 (DS1006-12)



TYPE 2 (DS1006-13)



TYPE 3 (DS1006-14)



TYPE 4 (DS1006-10)

GENERAL TOLERANCE

X.	±0.60
.X	±0.38
.XX	±0.25

ANGLE TOLERANCE

X.	±5°
.X	±3°
.XX	±2°

PROJECTION

UNITS	mm
SHEET SIZE	A4

TITLE

DIP STRIP ADAPTER PITCH 2.54mm	
SERIES	DS1004 SERIES

DRAWING TYPE CUSTOMER

SCALE 1:1 SHEET 10F1

DRAWING NO. C-DS1004-XXX



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 03/30/06'	~	LJC 03/30/06'
B	整理图纸	YCH 10/18/10'	~	

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1004
- PRODUCT NUMBER CODE:
DS1004 - X X X

CONTACT TYPE
1: TYPE 1 3: TYPE 3
2: TYPE 2 4: TYPE 4

CONTACT PLATING
F1: Full GOLD FLASH

No.OF CONTACTS
1*1 - 1*40
2*1 - 2*40