

D-SUB CONNECTOR PCB STRAIGHT

MATERIAL


INSULATOR : 30% Glass fiber PBT
 CONTACT PIN : F: Phosphor bronze
 M: Brass

SPECIFICATION




CURRENT RATE : 1 AMP
 INSULATION RESISTANCE : 1000MΩ Min. at 500V DC
 CONTACT RESISTANCE : 30mΩ Max.
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V for one minute
 OPERATION TEMPERATURE : -55°C to +105°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MALE

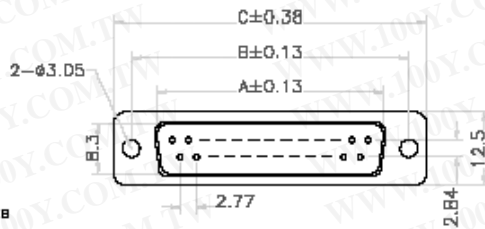

FEMALE

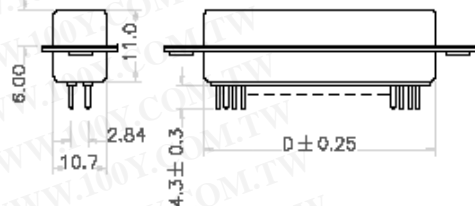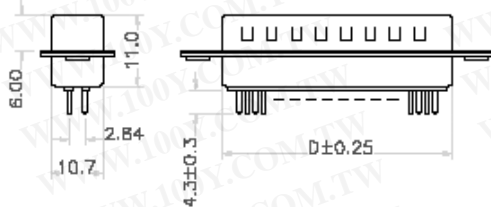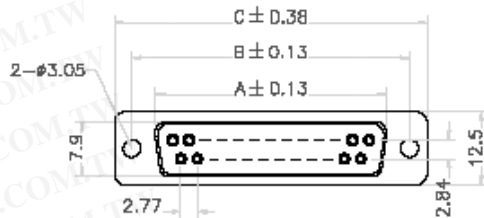

MALE

No. \ Dim	A	B	C	D
9M	16.92	24.99	30.81	19.28
15M	25.25	33.32	39.14	27.51
25M	38.96	47.04	53.04	41.30
37M	55.42	63.50	69.32	57.71

FEMALE

No. \ Dim	A	B	C	D
9F	16.33	24.99	30.81	19.28
15F	24.66	33.32	39.14	27.51
25F	38.38	47.04	53.04	41.30
37F	54.84	63.50	69.32	57.71

1. F: Female
M: Male
2. No. of contacts (9,15,25,37)
3. G: Gold flash
S: Selective
4. B: Black Insulator
W: White Insulator
U: Blue Insulator
5. T: Tin shell
Z: Zinc shell
6. A: Non accessories
B: Front rivet #4-40, height=4.0
C: Front rivet M3, height=4.0
D: Rear rivet #4-40, height=4.0
E: Rear rivet M3, height=4.0
F: Rear rivet boardlock #4-40