





φ3



M4

φ3/M4

高負載/高速


電源：DC10~30V

最大負載：200mA


應答速度：3KHz

保護等級：IP67，短路與過載保護

尺 寸	固定方式	檢出距離	出力方式	型號(N.O.)
φ3	埋入	0.6mm	PNP	9980-3010
			NPN	9980-3110
M4	埋入	0.6mm	PNP	9980-1210
			NPN	9980-1410



φ4



M5

φ4/M5

高負載/高速


電源：DC10~30V

最大負載：200mA


應答速度：5KHz

保護等級：IP67，短路與過載保護

尺 寸	固定方式	檢出距離	出力方式	型號(N.O.)
φ4	埋入	0.8mm	PNP	9980-1010
			NPN	9980-1110
M5	埋入	0.8mm	PNP	9980-2010
			NPN	9980-2110



φ6.5埋入

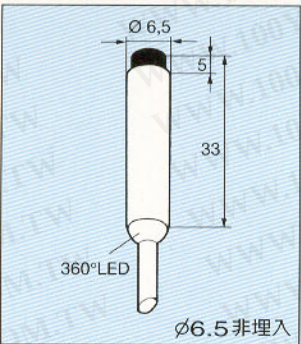

φ6.5非埋入

φ 6.5

高負載/高速


電源：DC10~30V

最大負載：200mA


應答速度：3K/2.5KHz

保護等級：IP67，短路與過載保護

固定方式	檢出距離	出力方式	型號(N.O.)	型號(N.C.)
埋入	2mm	PNP	9981-6000	9981-6400
		NPN	9981-6100	9981-6500
非埋入	3mm	PNP	9981-6200	9981-6600
		NPN	9981-6300	9981-6700

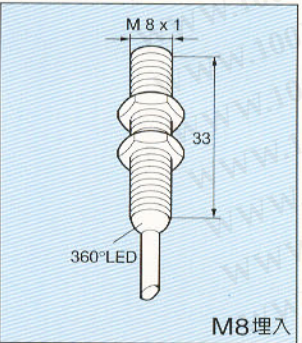

M8埋入



M8非埋入

M8

高負載/高速


電源：DC10~30V

最大負載：200mA


應答速度：埋入3KHz、非埋入2.5KHz

保護等級：IP67，短路與過載保護

固定方式	檢出距離	出力方式	型號(N.O.)	型號(N.C.)
埋入	2mm	PNP	9981-1000	9981-1400
		NPN	9981-1100	9981-1500
非埋入	3mm	PNP	9981-1200	9981-1600
		NPN	9981-1300	9981-1700



M8埋入

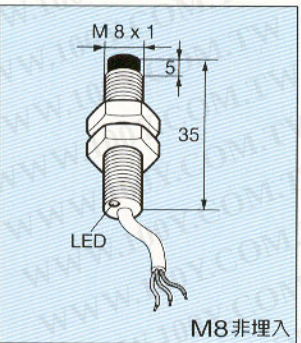

M8非埋入

M8

高負載/高速

電源：DC10~30V

最大負載：200mA

應答速度：2KHz

保護等級：IP67，短路與過載保護

固定方式	檢出距離	出力方式	型號(N.O.)
埋入	1.5mm	PNP	9981-2000
		NPN	9981-2100
非埋入	2 mm	PNP	9981-2200
		NPN	9981-2300



INDUCTIVE SENSORS ULTRA MINI

TABLE OF CONTENT

Designation code

How to read sensor designations

3

Circuit diagrams

Connection according to EN 60947-5-2

4

Sensors

Cylinder G3	5
Cylinder M4	6
Cylinder G4	7
Cylinder M5	9
Cylinder G5	11
Cylinder G6,5	12
Cylinder M8	14
Cylinder G8	16
Square Q5	18
Square Q8	19

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



INDUCTIVE SENSORS ULTRA MINI

DESIGNATION CODE

Example: **K J 10 - M 30 M B 45 - D P S - V1 - X0000**

1 = Working principle

A	Acoustic		
B	Acceleration sensor		
C	Capacitive		
D	Strain gauge sensor		
H	Hall-effect		
J	Inductive	JR	Inductive ring
		JF	Inductive surface
		JG	Inductive slot
		JD	Metalface
M	Magnetoresistive		
N	Inclination sensor		
R	Reed-contact		
W	Angle sensor		

2 = Switching distance / range

3 = Design

D	Ring housing
G	Cylindrical housing without thread
M	Cylindrical housing with metrical thread
Q	Square housing

4 = Housing diameter / edge length

5 = Housing material

A	Aluminium
E	Stainless steel
K	Plastic
M	Brass, nickel plated
T	PTFE

6 = Installation

B	Shielded
N	Non shielded

7 = Tube length

8 = Operating voltage

AZ	AC alternating current voltage
D	DC direct current voltage
VZ	AC/DC all voltages

9 = Type of output signal

AN	Analog	ANI	Current output
		ANU	Voltage output
N	NPN	CAN	CAN-bus interface
NA	Namur		
P	PNP		
Z	Two wire		

10 = Function

A	Changeover
I	Impulse output
Ö	N.C.
S	N.O.
U	Switchable

11 = Connection

V1	M8 screw-/snap-in
V2	M12 metal
V2/1	M12 plastic
V3	M5 metal
V4	Amphenol Tuchel
V6	Brad Harrison
V7	Valve connector type A
V8	M8 snap-in only
V9	Torson
V10	Valve connector type C
V11	AC connector 1/2" UNF
V12	M18 plastic
VE	Euchner connector
RS232	Data interface
PG	Thread joint PG
Mxx	Thread joint metrical

others as requested

12 = Additional marks

AM	Sensing face in centre
FE	Reduction 1 to steel / iron
HT	High temperature
NF	Reduction 1 to nonferrous metal
SF	Weld field immune
T	Enlarged temperature range
W	Angled sensing face / angled cable exit
X	Customized design with detailed description

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



INDUCTIVE SENSORS ULTRA MINI

CIRCUIT DIAGRAMS

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Circuit diagram for	Cable / clamp connection	Connector V1 ... V9
DPS DC PNP N.O.		
DPÖ DC PNP N.C.		
DPA DC PNP changeover		
DPU DC NO/NC switchable		
DNS DC NPN N.O.		
DNÖ DC NPN N.C.		
DNA DC NPN changeover		
DNU DC NO/NC switchable		
NA Namur EN 60947-5-6		
DZS DC two-wire N.O.		
DZÖ DC two-wire N.C.		
AZS/VZS AC/DC two-wire N.O.		
AZÖ/VZÖ AC/DC two-wire N.C.		
Analog		



INDUCTIVE SENSORS ULTRA MINI

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_o	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	-25°C ... +70°C
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	stainless steel
Front cap	POM
Connection	2m cable PUR 3 x 0,15mm ²


Other cable lengths as requested.



Selection chart

Article number	Designation	Output signal	Switching distance
08317803010	KJ0,6-G3EB22-DPS	PNP	0,6mm
08313030081	SJ0,8-G3EB22-DPS	PNP	0,8mm
08313030082	SJ0,8-G3EB22-DPÖ	PNP	0,8mm
08313030083	SJ0,8-G3EB22-DNS	NPN	0,8mm
08313030084	SJ0,8-G3EB22-DNÖ	NPN	0,8mm

Dimensions

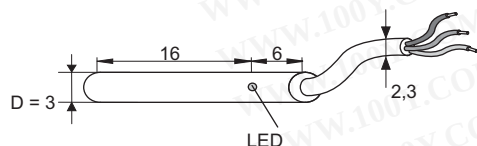

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



INDUCTIVE SENSORS ULTRA MINI

CYLINDER M4

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_o	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$< 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	$-25^\circ C \dots +70^\circ C$
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	stainless steel
Front cap	POM
Connection	2m cable PUR 3 x 0,15mm ²




Other cable lengths as requested.

Selection chart

Article number	Designation	Output signal	Switching distance
08317801210	KJ0,6-M4EB-DPS	PNP	0,6mm
08313040085	SJ0,8-M4EB22-DPS	PNP	0,8mm
08313040086	SJ0,8-M4EB22-DPÖ	PNP	0,8mm
08313040087	SJ0,8-M4EB22-DNS	NPN	0,8mm
08313040088	SJ0,8-M4EB22-DNÖ	NPN	0,8mm

Dimensions

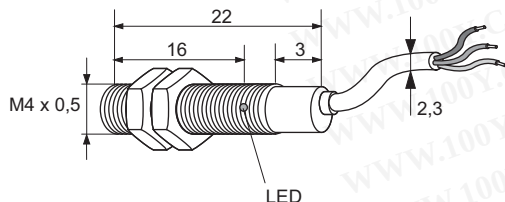

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

CYLINDER G4

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_o	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	$-25^\circ C \dots +70^\circ C$
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	stainless steel
Front cap	POM



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

The drawings of these sensors are shown on the following page.

Selection chart

Article number	Designation standard	Output signal	Connection	Switching distance	Drawing (next page)
08317801010	KJ0,8-G4EB25-DPS	PNP	2m cable PUR 3 x 0,15mm ²	0,8mm	A
08317801110	KJ0,8-G4EB25-DNS	NPN	2m cable PUR 3 x 0,15mm ²	0,8mm	A
08317801064	KJ0,8-G4EB38-DPS-V1	PNP	connector M8 3-pole	0,8mm	A1
08316801164	KJ0,8-G4EB38-DNS-V1	NPN	connector M8 3-pole	0,8mm	A1
08313040120	SJ1-G4EB25-DPÖ	PNP	2m cable PUR 3 x 0,15mm ²	1mm	A
08313040130	SJ1-G4EB25-DNS	NPN	2m cable PUR 3 x 0,15mm ²	1mm	A
08313040140	SJ1-G4EB25-DNÖ	NPN	2m cable PUR 3 x 0,15mm ²	1mm	A
08313040131	SJ1-G4EB40-DNS-V1	NPN	connector M8 3-pole	1mm	A1
08313040141	SJ1-G4EB40-DNÖ-V1	NPN	connector M8 3-pole	1mm	A1
08313040161	SJ0,8-G4EB36-DPS-V3	PNP	connector M5 4-pole	0,8mm	B
	Designation angled				
08313040112	SJ1W-G4EB30-DPS	PNP	2m cable PUR 3 x 0,15mm ²	1mm	C
08313040113	SJ1W-G4EB40-DPS-V1	PNP	connector M8 3-pole	1mm	C1
	Designation double switching distance				
08313041510	SJ1,5-G4EB25-DPS	PNP	2m cable PUR 3 x 0,15mm ²	1,5mm	A
08313041530	SJ1,5-G4EB25-DNS	NPN	2m cable PUR 3 x 0,15mm ²	1,5mm	A
08313041511	SJ1,5-G4EB40-DPS-V1	PNP	connector M8 3-pole	1,5mm	A1
08313041531	SJ1,5-G4EB40-DNS-V1	NPN	connector M8 3-pole	1,5mm	A1






Other cable lengths and output configurations on request.



INDUCTIVE SENSORS ULTRA MINI

CYLINDER G4

Dimensions

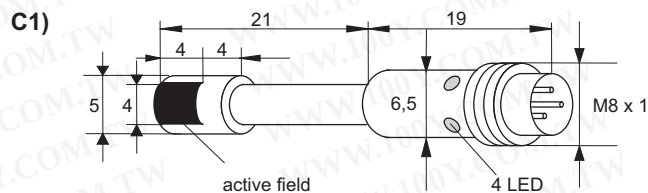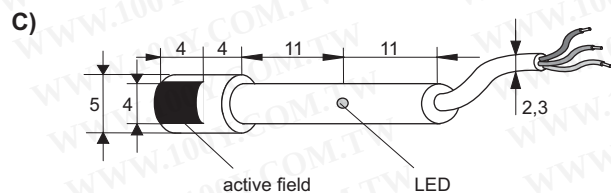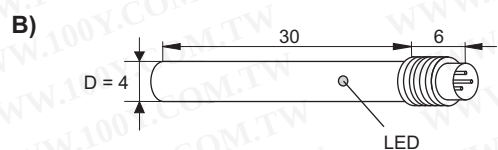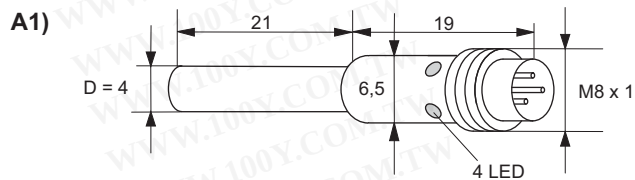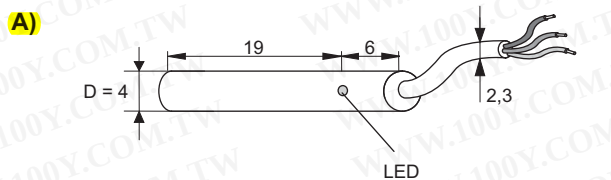

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

CYLINDER M5

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_0	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	$-25^\circ C \dots +70^\circ C$
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	stainless steel
Front cap	POM (except SJ0,8... PCP)



The drawings of these sensors are shown on the following page.

Selection chart

Article number	Designation standard	Output signal	Switching distance	Connection	Drawing (next page)
08313050124	SJ0,8-M5EB28-DPÖ	PNP	0,8mm	2m cable PUR 3 x 0,15mm ²	A
08313050144	SJ0,8-M5EB28-DNÖ	NPN	0,8mm	2m cable PUR 3 x 0,15mm ²	A
08310000023	KJ0,8-M5EB25-DPS	PNP	0,8mm	2m cable PUR 3 x 0,15mm ²	B
08317802110	KJ0,8-M5EB25-DNS	NPN	0,8mm	2m cable PUR 3 x 0,15mm ²	B
08317802064	KJ0,8-M5EB38-DPS-V1	PNP	0,8mm	connector M8 3-pole	B1
08317802464	KJ0,8-M5EB38-DPÖ-V1	PNP	0,8mm	connector M8 3-pole	B1
08313050111	SJ1-M5EB40-DPS-V1	PNP	1mm	connector M8 3-pole	B1
08313050161	SJ0,8-M5EB36-DPS-V3	PNP	0,8mm	connector M5 4-pole	C
Designation angled					
08313050112	SJ1W-M5EB30-DPS	PNP	1mm	2m cable PUR 3 x 0,15mm ²	D
Designation double switching distance					
08313051590	SJ1,5-M5EB25-DPS	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	B
08313051597	SJ1,5-M5EB40-DPS-V1	PNP	1,5mm	connector M8 3-pole	B1

Other cable lengths and output configurations as requested.






勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



INDUCTIVE SENSORS ULTRA MINI

CYLINDER M5

Dimensions

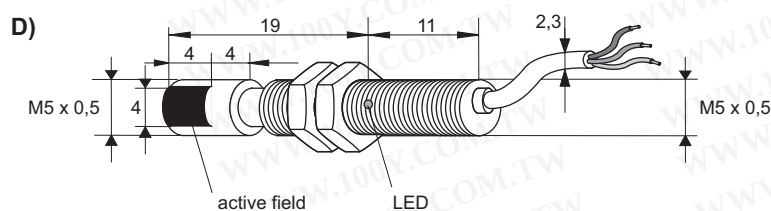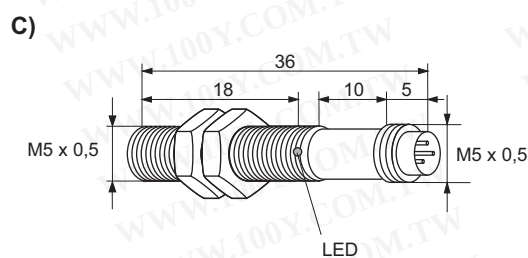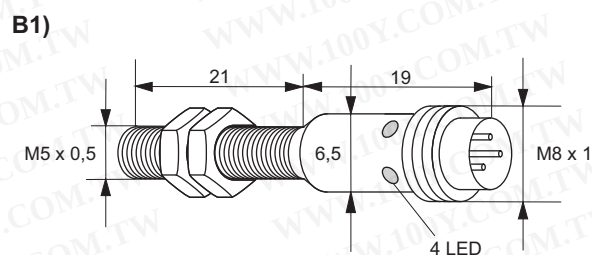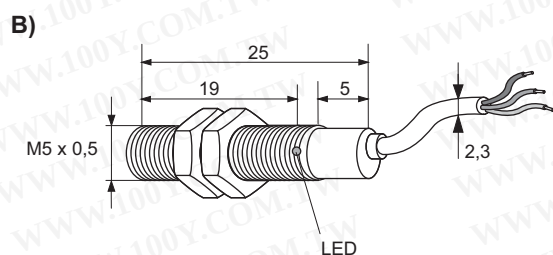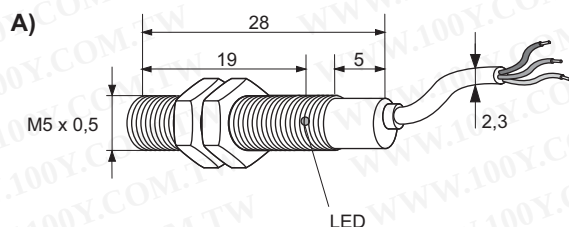

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

CYLINDER G5

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_0	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Switching distance	1,5mm
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	-25°C ... +70°C
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	stainless steel
Front cap	POM
Connection	2m cable PVC 3 x 0,15mm ²




Other cable lengths as requested.

Selection chart

Article number	Designation	Output signal
08313050151	SJ1,5-G5EB25-DPS	PNP
08313050152	SJ1,5-G5EB25-DPÖ	PNP
08313050153	SJ1,5-G5EB25-DNS	NPN
08313050154	SJ1,5-G5EB25-DNÖ	NPN

Dimensions

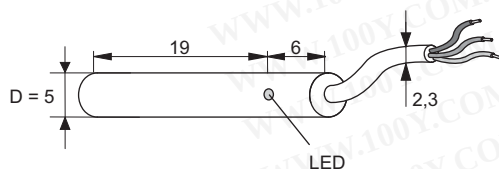

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

CYLINDER G6,5




General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_0	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	$-25^\circ C \dots +70^\circ C$
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	stainless steel
Front cap	POM



The selection chart for these sensors is shown on the following page.

Dimensions

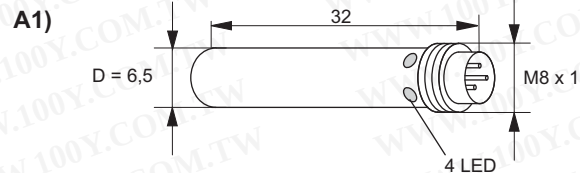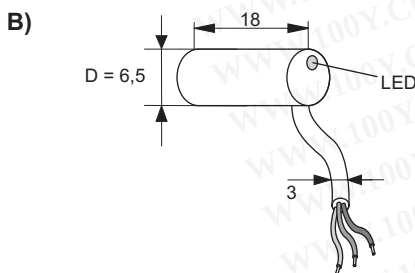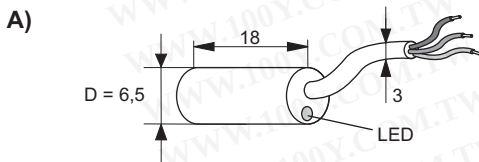

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

CYLINDER G6,5

Selection chart

Article number	Designation standard	Output signal	Switching distance	Connection	Drawing (previous page)
08313650151	SJ1,5-G6,5EB18-DPS	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313650152	SJ1,5-G6,5EB18-DPÖ	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313650153	SJ1,5-G6,5EB18-DNS	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313650154	SJ1,5-G6,5EB18-DNÖ	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313651511	SJ1,5-G6,5EB32-DPS-V1	PNP	1,5mm	connector M8 3-pole	A1
08313651521	SJ1,5-G6,5EB32-DPÖ-V1	PNP	1,5mm	connector M8 3-pole	A1
08313651531	SJ1,5-G6,5EB32-DNS-V1	NPN	1,5mm	connector M8 3-pole	A1
08313651541	SJ1,5-G6,5EB32-DNÖ-V1	NPN	1,5mm	connector M8 3-pole	A1
08313650210	SJ2-G6,5EB18-DPS	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313650220	SJ2-G6,5EB18-DPÖ	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313650230	SJ2-G6,5EB18-DNS	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313650240	SJ2-G6,5EB18-DNÖ	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313651211	SJ2-G6,5EB32-DPS-V1	PNP	2mm	connector M8 3-pole	A1
08313651221	SJ2-G6,5EB32-DPÖ-V1	PNP	2mm	connector M8 3-pole	A1
08313651231	SJ2-G6,5EB32-DNS-V1	NPN	2mm	connector M8 3-pole	A1
08313651241	SJ2-G6,5EB32-DNÖ-V1	NPN	2mm	connector M8 3-pole	A1
08313650310	SJ3-G6,5EB18-DPS	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313650320	SJ3-G6,5EB18-DPÖ	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313650330	SJ3-G6,5EB18-DNS	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313650340	SJ3-G6,5EB18-DNÖ	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313651311	SJ3-G6,5EB32-DPS-V1	PNP	3mm	connector M8 3-pole	A1
08313651321	SJ3-G6,5EB32-DPÖ-V1	PNP	3mm	connector M8 3-pole	A1
08313651331	SJ3-G6,5EB32-DNS-V1	NPN	3mm	connector M8 3-pole	A1
08313651341	SJ3-G6,5EB32-DNÖ-V1	NPN	3mm	connector M8 3-pole	A1
	Designation angled				
08313650155	SJ1,5-G6,5EB18-DPS-W	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	B
08313650212	SJ2-G6,5EB18-DPS-W	PNP	2mm	2m cable PUR 3 x 0,15mm ²	B
08313650312	SJ3-G6,5EB18-DPS-W	PNP	3mm	2m cable PUR 3 x 0,15mm ²	B

Other cable lengths as requested.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



INDUCTIVE SENSORS ULTRA MINI

CYLINDER M8

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_0	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	$-25^\circ C \dots +70^\circ C$
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	stainless steel
Front cap	POM



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

The drawings of these sensors
are shown on the following page.

Selection chart



Article number	Designation standard	Output signal	Switching distance	Connection	Drawing (next page)
08313080151	SJ1,5-M8EB18-DPS	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313080152	SJ1,5-M8EB18-DPÖ	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313080153	SJ1,5-M8EB18-DNS	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313080154	SJ1,5-M8EB18-DNÖ	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08310000027	KJ1,5-M8EB30-DPS-V1	PNP	1,5mm	connector M8 3-pole	A1
08310000482	KJ1,5-M8EB30-DPÖ-V1	PNP	1,5mm	connector M8 3-pole	A1
08313080157	SJ1,5-M8EB32-DNS-V1	NPN	1,5mm	connector M8 3-pole	A1
08313080158	SJ1,5-M8EB32-DNÖ-V1	NPN	1,5mm	connector M8 3-pole	A1
08313080210	SJ2-M8EB18-DPS	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313080220	SJ2-M8EB18-DPÖ	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313080230	SJ2-M8EB18-DNS	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313080240	SJ2-M8EB18-DNÖ	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313080211	SJ2-M8EB32-DPS-V1	PNP	2mm	connector M8 3-pole	A1
08313080221	SJ2-M8EB32-DPÖ-V1	PNP	2mm	connector M8 3-pole	A1
08313080231	SJ2-M8EB32-DNS-V1	NPN	2mm	connector M8 3-pole	A1
08313080241	SJ2-M8EB32-DNÖ-V1	NPN	2mm	connector M8 3-pole	A1
08313080310	SJ3-M8EB18-DPS	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313080320	SJ3-M8EB18-DPÖ	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313080330	SJ3-M8EB18-DNS	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313080340	SJ3-M8EB18-DNÖ	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313080311	SJ3-M8EB32-DPS-V1	PNP	3mm	connector M8 3-pole	A1
08313080321	SJ3-M8EB32-DPÖ-V1	PNP	3mm	connector M8 3-pole	A1
08313080331	SJ3-M8EB32-DNS-V1	NPN	3mm	connector M8 3-pole	A1
08313080341	SJ3-M8EB32-DNÖ-V1	NPN	3mm	connector M8 3-pole	A1



INDUCTIVE SENSORS ULTRA MINI

CYLINDER M8

Dimensions

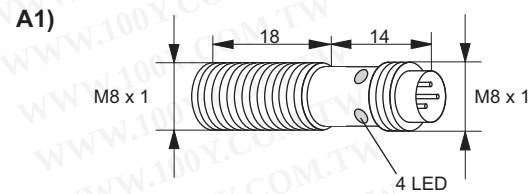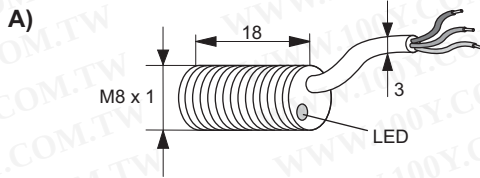

with two M8 screw nuts each

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

CYLINDER G8

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_0	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	$-25^\circ C \dots +70^\circ C$
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	Stainless steel
Front cap	POM



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

The drawings of these sensors
 are shown on the following page.

Selection chart



Article number	Designation standard	Output signal	Switching distance	Connection	Drawing (next page)
08313680151	SJ1,5-G8EB18-DPS	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313680152	SJ1,5-G8EB18-DPÖ	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313680153	SJ1,5-G8EB18-DNS	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313680154	SJ1,5-G8EB18-DNÖ	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313680155	SJ1,5-G8EB32-DPS-V1	PNP	1,5mm	connector M8 3-pole	A1
08313680156	SJ1,5-G8EB32-DPÖ-V1	PNP	1,5mm	connector M8 3-pole	A1
08313680157	SJ1,5-G8EB32-DNS-V1	NPN	1,5mm	connector M8 3-pole	A1
08313680158	SJ1,5-G8EB32-DNÖ-V1	NPN	1,5mm	connector M8 3-pole	A1
08313680210	SJ2-G8EB18-DPS	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313680220	SJ2-G8EB18-DPÖ	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313680230	SJ2-G8EB18-DNS	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313680240	SJ2-G8EB18-DNÖ	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313680211	SJ2-G8EB32-DPS-V1	PNP	2mm	connector M8 3-pole	A1
08313680221	SJ2-G8EB32-DPÖ-V1	PNP	2mm	connector M8 3-pole	A1
08313680231	SJ2-G8EB32-DNS-V1	NPN	2mm	connector M8 3-pole	A1
08313680241	SJ2-G8EB32-DNÖ-V1	NPN	2mm	connector M8 3-pole	A1
08313680310	SJ3-G8EB18-DPS	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313680320	SJ3-G8EB18-DPÖ	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313680330	SJ3-G8EB18-DNS	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313680340	SJ3-G8EB18-DNÖ	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313680311	SJ3-G8EB32-DPS-V1	PNP	3mm	connector M8 3-pole	A1
08313680321	SJ3-G8EB32-DPÖ-V1	PNP	3mm	connector M8 3-pole	A1
08313680331	SJ3-G8EB32-DNS-V1	NPN	3mm	connector M8 3-pole	A1
08313680341	SJ3-G8EB32-DNÖ-V1	NPN	3mm	connector M8 3-pole	A1



INDUCTIVE SENSORS ULTRA MINI

CYLINDER G8

Dimensions

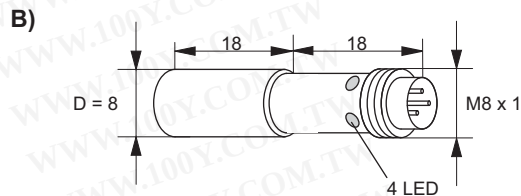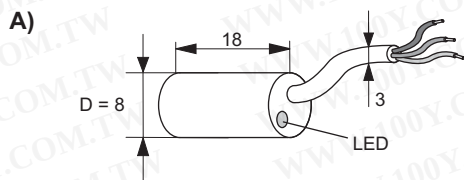

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

SQUARE Q5

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_b	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_o	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	$-25^\circ C \dots +70^\circ C$
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	brass, nickel-plated
Front cap	POM
Connection	2m cable PVC 3 x 0,15mm ²


Other cable lengths as requested.



Selection chart

Article number	Designation	Output signal
08313550110	SJ1-Q5MB26-DPS	PNP
08313550120	SJ1-Q5MB26-DPÖ	PNP
08313550130	SJ1-Q5MB26-DNS	NPN
08313550140	SJ1-Q5MB26-DNÖ	NPN

Dimensions

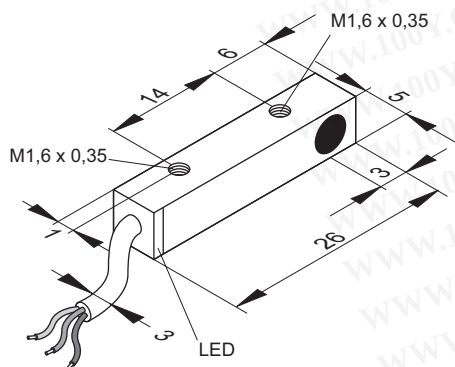

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm



INDUCTIVE SENSORS ULTRA MINI

SQUARE Q8

General data

Mounting	shielded
Operating voltage U_b	10 ... 30V DC
Ripple voltage U_r	$\leq 10\%$
Voltage drop U_d	$\leq 1V$
Max. load current	200mA
Off-state current I_0	$\leq 10mA$
Residual current I_r	$\leq 10\mu A$
Max. switching frequency f	2000Hz
Hysteresis H	$\leq 15\%$
Repeatability R	$\leq 1\%$
Operating temperature T_a	-25°C ... +70°C
Temperature drift	$\leq 10\%$
Protection class	IP67
EMV-standard	according to EN 60947-5-2
Switching state	LED yellow
Housing material	brass, nickel-plated
Front cap	POM

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



The drawings of these sensors are shown on the following page.

Dimensions



Article number	Designation standard	Output signal	Switching distance	Connection	Drawing (next page)
08313880151	SJ1,5-Q8MB16-DPS	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313880152	SJ1,5-Q8MB16-DPÖ	PNP	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313880153	SJ1,5-Q8MB16-DNS	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313880154	SJ1,5-Q8MB16-DNÖ	NPN	1,5mm	2m cable PUR 3 x 0,15mm ²	A
08313880155	SJ1,5-Q8MB28-DPS-V1	PNP	1,5mm	connector M8 3-pole	A1
08313880156	SJ1,5-Q8MB28-DPÖ-V1	PNP	1,5mm	connector M8 3-pole	A1
08313880157	SJ1,5-Q8MB28-DNS-V1	NPN	1,5mm	connector M8 3-pole	A1
08313880158	SJ1,5-Q8MB28-DNÖ-V1	NPN	1,5mm	connector M8 3-pole	A1
08313880210	SJ2-Q8MB16-DPS	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313880220	SJ2-Q8MB16-DPÖ	PNP	2mm	2m cable PUR 3 x 0,15mm ²	A
08313880230	SJ2-Q8MB16-DNS	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313880240	SJ2-Q8MB16-DNÖ	NPN	2mm	2m cable PUR 3 x 0,15mm ²	A
08313880211	SJ2-Q8MB28-DPS-V1	PNP	2mm	connector M8 3-pole	A1
08313880221	SJ2-Q8MB28-DPÖ-V1	PNP	2mm	connector M8 3-pole	A1
08313880231	SJ2-Q8MB28-DNS-V1	NPN	2mm	connector M8 3-pole	A1
08313880241	SJ2-Q8MB28-DNÖ-V1	NPN	2mm	connector M8 3-pole	A1
08313880310	SJ3-Q8MB16-DPS	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313880320	SJ3-Q8MB16-DPÖ	PNP	3mm	2m cable PUR 3 x 0,15mm ²	A
08313880330	SJ3-Q8MB16-DNS	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313880340	SJ3-Q8MB16-DNÖ	NPN	3mm	2m cable PUR 3 x 0,15mm ²	A
08313880311	SJ3-Q8MB28-DPS-V1	PNP	3mm	connector M8 3-pole	A1
08313880321	SJ3-Q8MB28-DPÖ-V1	PNP	3mm	connector M8 3-pole	A1
08313880331	SJ3-Q8MB28-DNS-V1	NPN	3mm	connector M8 3-pole	A1
08313880341	SJ3-Q8MB28-DNÖ-V1	NPN	3mm	connector M8 3-pole	A1



INDUCTIVE SENSORS ULTRA MINI

SQUARE Q8

Dimensions

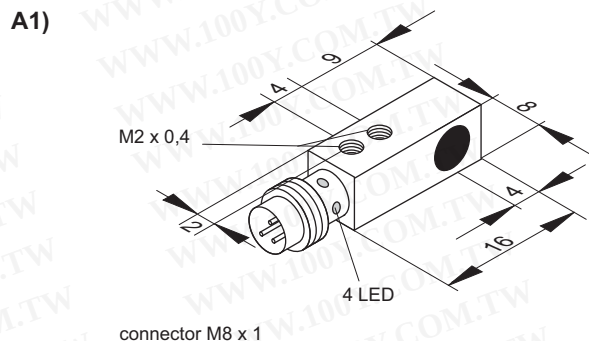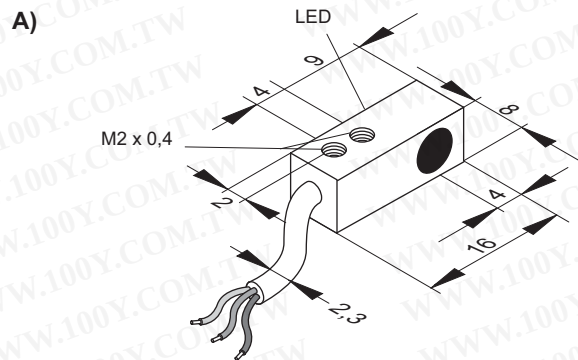

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

all data in mm