



# TAV

## LFS Series

### Paddle Flow Switches

- **Stainless steel SS304 paddle**
- **3/4"PF or 1"PT mounting plug thread**
- **IP65 Aluminium alloy housing or DIN 43650 connection**
- **Use for flow detection in pipes from 1" bore to 3" bore**
- **Maximum operating pressure 20 bar**



#### Technical Specification

Housing material	Aluminium Alloy	Paddle material	304grade SS
Temperature range	See chart below	Maximum pressure	20 bar
Set point tolerance	±25 %	Pressure drop	0.2 bar
Repeatability	±5%	Connection in housing or by DIN 43650	

#### Electrical Specification

Contact Form		SPDT
Switching Power Max	VA	40
Switching Voltage AC/DC Max	V	230
Switching Current Max	A	1.0

All ratings are for resistive load only.

Standard Parts	Mounting thread	Operating Temperature	Connection
LFS-01	1"NPT	-30 to +75°C	Terminate in housing
LFS-01H	1"NPT	-30 to +150°C	Terminate in housing
LFS-02	3/4"BSP	-30 to +75°C	Terminate in housing
LFS-02H	3/4"BSP	-30 to +150°C	Terminate in housing
LFS-03	1"NPT	-30 to +75°C	DIN 43650
LFS-03H	1"NPT	-30 to +120°C	DIN 43650
LFS-04	3/4"BSP	-30 to +75°C	DIN 43650
LFS-04H	3/4"BSP	-30 to +120°C	DIN 43650

The LFS range of flow switches are paddle devices that are mounted vertically through a socket or upstand process connection.


Electrical connections are made within the housing, which has a screw on sealed lid and cable gland.

A choice of paddle sizes is supplied with each switch and selection can be made with reference to the chart opposite.

Pipe Dia	1"		1.25"		1.50"		2"		2.5"		3"	
	Op	Rel	Op	Rel	Op	Rel	Op	Rel	Op	Rel	Op	Rel
<b>Paddle length</b>												
<b>1"</b>	19	15.2	32.2	24.7	45.5	34.1	64.4	56.8				
<b>1.25"</b>			24.7	17.1	34.1	26.5	56.8	45.5	87.1	75.8		
<b>1.50"</b>					53	37.9	87.1	60.6	121.2	94.7		
<b>2"</b>							68.2	45.5	90.9	64.4	125	102.3
<b>2.5"</b>									75.8	49.3	102.3	121.2
<b>3"</b>											83.3	60.6

NB: Flow rates in litres per minute

#### Mechanical Dimensions

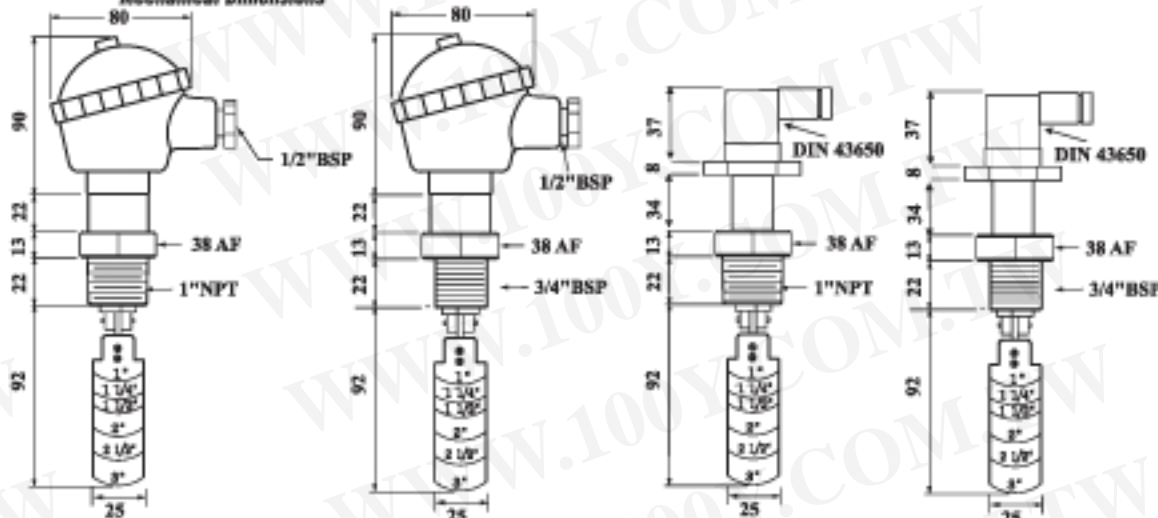

勝特力材料 86-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)