
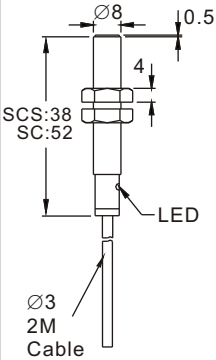
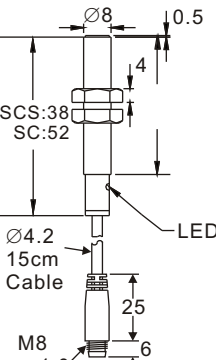
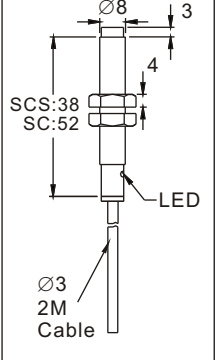
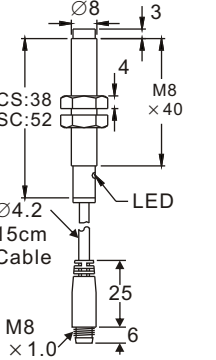
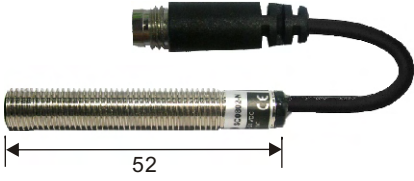
















Specifications/規格表:

SCS0801-□  38					
SC0801-□ D  52					
SCS0802-□  38					
SC0802-□D1  59					
		<unit:mm>	<unit:mm>	<unit:mm>	<unit:mm>
Output method / 輸出模式	NPN.NO	SC□0801-N	SC□0801-ND	SC□0802-N	SC□0802-ND
	NPN.NC	SC□0801-N2	SC□0801-N2D	SC□0802-N2	SC□0802-N2D
	PNP.NO	SC□0801-P	SC□0801-PD	SC□0802-P	SC□0802-PD
	PNP.NC	SC□0801-P2	SC□0801-P2D	SC□0802-P2	SC□0802-P2D
	NPN.NO/NC	—	—	—	—
	PNP.NO/NC	—	—	—	—
	SCR.NO	—	—	—	—
SCR.NC	—	—	—	—	
Description / 檢出方式	Shielded / 隔離型		Unshielded / 非隔離型		
Description / 外型	Standard / 標準 M8				
Hysteresis / 遲滯	≤ 10 % of sensing distance				
Sensing distance / 檢出距離	1 mm		2 mm		
Response frequency / 反應頻率	1 K Hz				
Recommended distance / 建議距離	0 to 0.9 mm		0 to 1.8 mm		
Standard sensing object / 標準檢測物	Iron 8 × 8 × 1 mm				
Operating voltage / 工作電壓	DC : 10 ~ 30 VDC				
Current consumption / 消耗電流	≤ 8 mA no-load				
Output current / 輸出電流	30 V 100 mA Max.				
Leakage current / 漏電流	≤ 1.1 mA no-load				
Residual voltage / 殘餘電壓	≤ 1.5 VDC				
Operating temperature / 工作溫度範圍	- 25 °C ~ + 60 °C				
Wiring method / 出線方式	Pre-wired Ø3 × 2M / 3-wire	M8 pigtailed type / M8 接頭15cm 電線式	Pre-wired Ø3 × 2M / 3-wire	M8 pigtailed type / M8 接頭15cm 電線式	
Protection degree / 防水等級	IP 66				

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>