


## TL-B5 Series

- 👍 **No-touch operation 、 high response frequency 、 wide application range.**
- 👍 **Reverse polarity and Swapped signal wires protection.**
- 👍 **High-intensity LED for sending indication.**
- 👍 **Good environmental resistance 、 all products are CE approved**
- 👍 **High degree of protection up to IP67**

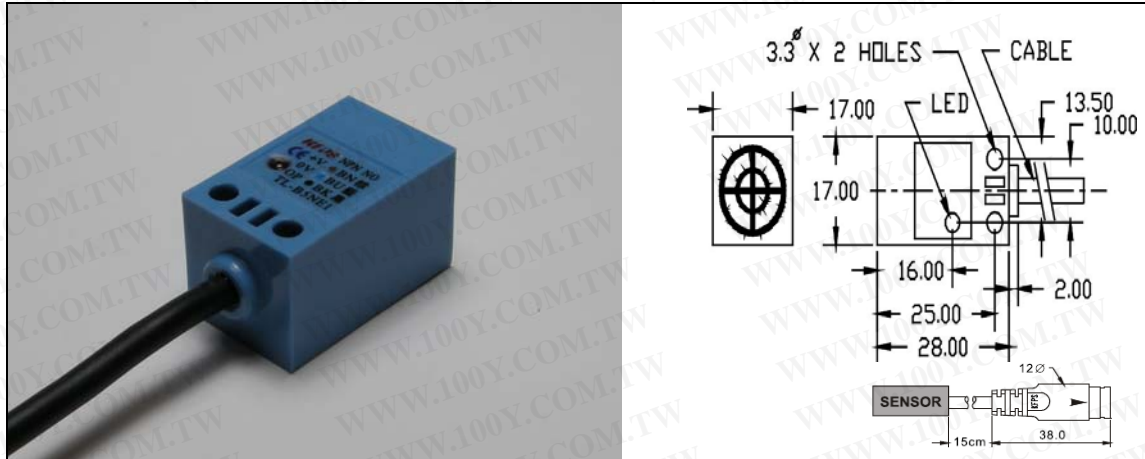

Switching Output	Model Number	Operating voltage	Response frequency	Connecting method
DC 3-Wire NPN NO	TL-B5NE1	DC 10~30V	600Hz	Pre-wired 2M Cable
	TL-B5NE1-C			Cable with Quick connector
DC 3-Wire NPN NC	TL-B5NE2			Pre-wired 2M Cable
	TL-B5NE2-C			Cable with Quick connector
DC 3-Wire PNP NO	TL-B5PE1			Pre-wired 2M Cable
	TL-B5PE1-C			Cable with Quick connector
DC 3-Wire PNP NC	TL-B5PE2			Pre-wired 2M Cable
	TL-B5PE2-C			Cable with Quick connector

Item	Specifications
Standard sensing object	Iron, 18×18×1 mm
Sensing distance	5mm
Load current	0 ~ 200mA
Operation indicator	Red LED
Circuits protection	Reversed polarity & Short circuit protection
Enclosure protection	IEC IP67
Ambient temperature & humidity range	Operating : -25 ~ 70℃ / RH 35 ~95% (with no icing or condensation)
Insulation resistance	50MΩ minimum. (at 500VDC) between current carry parts and case

Voltage with stand ability	1000VAC 50/60Hz for 1 minute between current carry parts and case
Vibration resistance	10 ~ 55Hz : 15mm double amplitude for 2 hours each in X,Y and Z directions
Shock resistance	500m/s <sup>2</sup> (50G approx) 10 times each in X,Y and Z directions
Housing material	ABS

勝 特 力 材 料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)