

## Technical Data Sheet

CV1016I

### Product Description

Contact Cleaner is a plastics safe contact cleaner that removes oxides and other soils on de-energized equipment. Engineered with very low surface tension, this high pressure aerosol formulation flushes areas clean and evaporates instantly leaving no residue.

- Removes oxides, dust, dirt, and grime from contact areas
- Penetrates hard to reach areas
- Evaporates quickly
- Leaves no residues
- Has low odor
- Is non-corrosive
- Contains no CFCs or HCFCs or 1,1,1 Trichloroethane
- Contains no Chlorinated Solvents

### Typical Applications

Contact Cleaner removes oxidation and other soils from:

- Contacts
- Relays
- Fuse Boxes
- Rheostats and Potentiometers
- Selector Switches
- Terminals
- Timers
- Printed Circuit Boards

### Usage Instructions


- Read MSDS before use
- Safe for use on most plastics
- Safe for use on de-energized equipment

### Typical Product Attributes

Surface Tension (dynes/cm @ 21.6°C)	18.3
Dielectric Strength	44 KV
Specific Gravity (water = 1@20°C)	0.67
Evaporation Rate (butyl acetate=1)	<1
Flash Point (TCC)	-29°C
Boiling Point	60°C Initial
Odor	Mild
Kauri-Butanol (KB) Value	50

### COMPETITIVE ASSESSMENT

Milligrams of Lithium Grease Removed Per 7 Second Spray

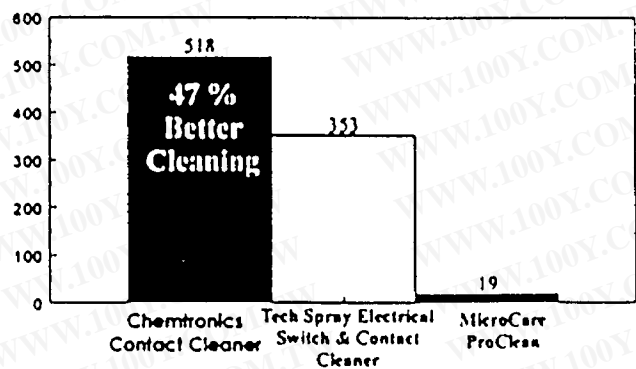

### Manufactured By:

Chemtronics® Inc.  
8125 Cobb Center Drive  
Kennesaw, Ga 30152 U S A

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

NOTE: This information is believed to be accurate. It is intended for professional end users having the skills to evaluate and use the data properly. CHEMTRONICS® does not guarantee the accuracy of data and assumes no liability in connection with damages incurred while using it.

FOR MORE INFORMATION CALL 0113-2322625