

HG 2510 ESD

Professional Heat Guns with Electronic Thermocouple Control

STEINEL®
PROFESSIONAL



HG 2510 ESD Specifications

Item No.	34890
Temperature	120°F - 1200°F (49°C - 649°C)
Airflow	continuously variable 3.6 - 17.6 cfm
Switch	cool air stage, variable temperature & airflow
Programs	Four customizable pre-set temperature/airflow
Element	DuraTherm™ ceramic heating element
Output	1600 watts
Voltage	120 VAC / 60 Hz
Amps	12.5
Power Cord	industrial grade rubber, length: 6 ft
Nozzle Diameter	1.3" (33.0 mm)
Net Weight	2.2 lbs (35.2 oz)
Dimensions	10.2" x 3.5" x 8.0" (l x w x d)
Single Sell Pack	dimensions: 11.4" x 9.5" x 3.7" weight: 2.7 lbs (43.5 oz)
Warranty	one year limited
Certifications	C-UL-UL Listed, RoHs Compliant, ISO 9001:2001, ESD Safe, Made in E.U.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



HG 2510 ESD Three Stage Professional Heat Gun

HG 2510 ESD Programmable Heat Gun is designed for use on electronic components to prevent potential damage from electrostatic discharge.

HG 2510 ESD Programmable IntelliTemp™ Heat Gun features LOC Locable Override Control™ of temperature and airflow output settings. LCD display enables temperature selection in 10°F increments.

Applications

The HG 2510 ESD is ideal for use on electronics, aerospace, medical manufacturing and other applications requiring precision control.

Key Features:

- Lockable override control
- Variable temperature and airflow control
- Duratherm™ heating element
- Double insulated
- Reduction Nozzles are approved for use on Professional Heat Guns with electronic thermocouple control



Temperature Airflow



LOC Lockable
Override Control



Dual Air Filters



DuraTherm™
Heating Element



Soft Grip Handle



Rubber Stand



www.steinell.net

HG 2510 ESD


Professional Heat Guns with Electronic Thermocouple Control

STEINEL®
PROFESSIONAL

Programmable IntelliTemp™ Heat Gun

These four preprogrammed settings can be customized to meet the users needs.

Programs		
	°F / °C	CFM
1	480 / 250	12.4 cfm
2	660 / 350	14.8 cfm
3	860 / 460	17.6 cfm
4	1000 / 540	14.8 cfm

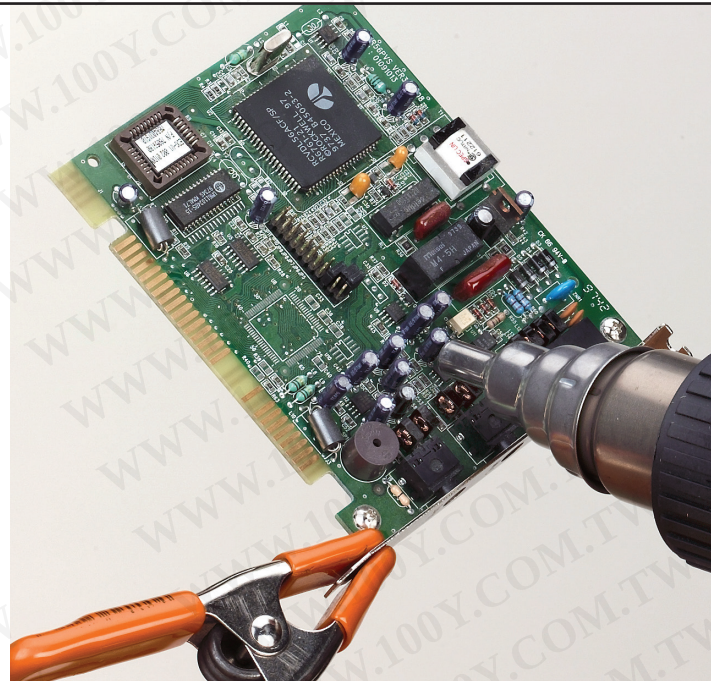

Accessories for a Variety of Applications

Visit www.steinel.net for our full line of accessories



Pinpoint Reducer
3.3" x 1.5" x 1.5"
No. 07082



9 mm Reducer Nozzle
2.5" x 1.5" x 1.5"
No. 07062



14 mm Reducer Nozzle
2.5" x 1.5" x 1.5"
No. 07071



Temperature Guard
3.2" x 3.2" x .01"
No. 07381



Wire Mesh
10.0" x 5.0" x 0.2
No. 07371



9 mm Reflector Nozzle
3.4" x 1.5" x 1.5"
No. 07061



14 mm Reflector Nozzle
2.3" x 1.5" x 1.5"
No. 07461



Welding Iron
2.5" x 1.5" x 1.0"
No. 07361



Plastic Welding Nozzle
2.0" x 1.3" x .4"
No. 07091



Welding Nozzle
2.6" x 1.2" x .5"
No. 07531




20 mm Lap Welding Slit Tip
2.0" x 0.8" x 0.4"
No. 07101



ThermoFlex™ Welding Rods
12" x 1.1" x 0.6"
No. 07352



HDPE Plastic Welding Rods
9.0" x 1.5" x 0.4"
No. 07121



Rigid PVC Welding Rods
9.0" x 1.5" x 0.4"
No. 07311



LDPE Plastic Welding Rods
9.0" x 1.5" x 0.4"
No. 07331



PP Plastic Welding Rods
9.0" x 1.5" x 0.4"
No. 07341



ABS Plastic Welding Rods
9.0" x 1.5" x 0.4"
No. 07421