
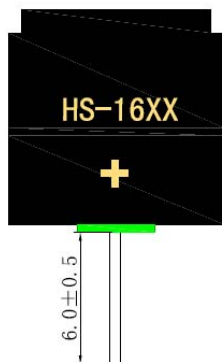
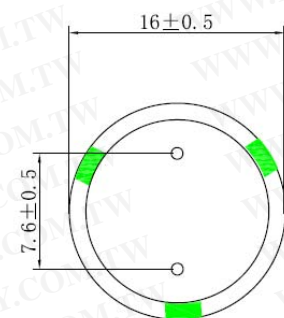
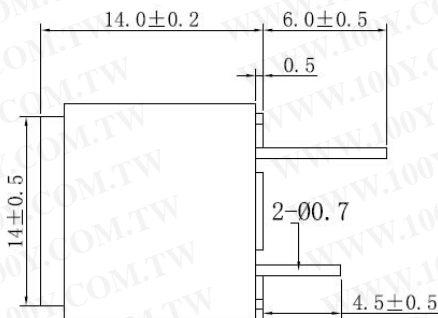
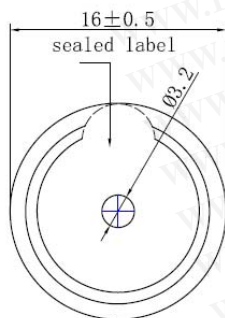
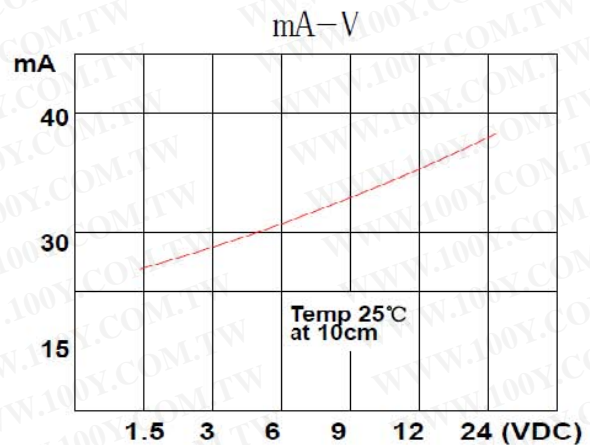


HS-1612A 電磁式蜂鳴器 自激式

Rated Voltage(VDC)	12
Operating Voltage(VDC)	8 ~ 16
CurrentConsumption Max (mA)	40
SPL Min. (dB) at 10cm	90
Resonant Frequency(Hz)	2300±300
Operating Temperature(°C)	-20~+70
Storage Temperature(°C)	-30~+80
Tone	Continuous Sound
Material	PPO

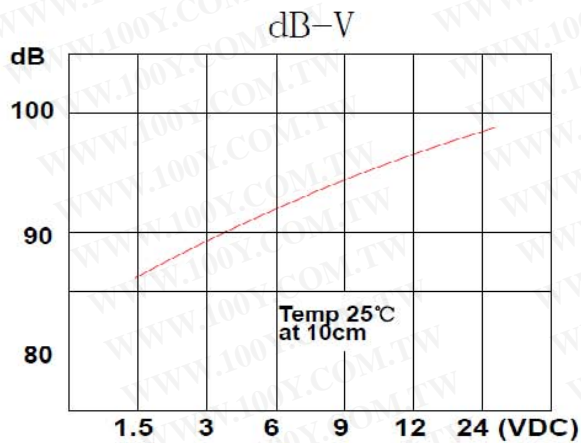

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)